

FIGURE 1: PLUG DIMENSIONS

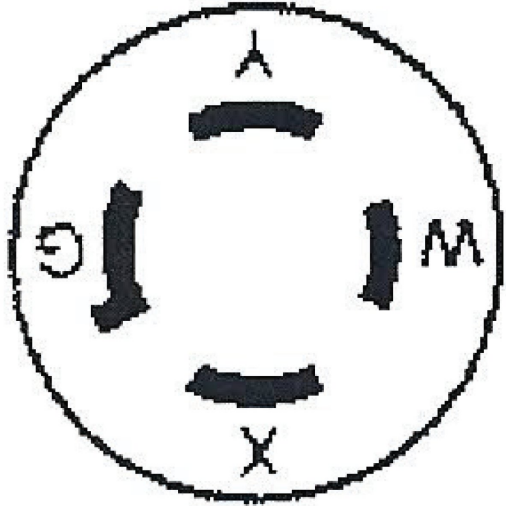


FIGURE 2: NEMA L14-20

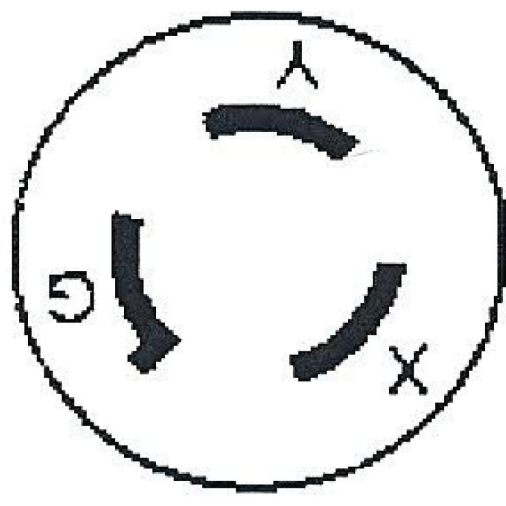


FIGURE 3: NEMA L6-15

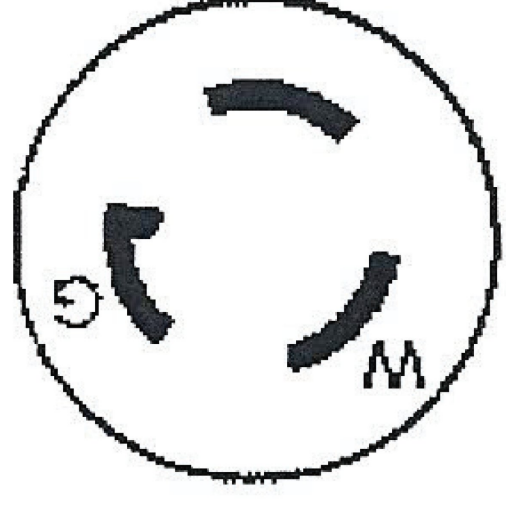


FIGURE 4: NEMA L5-15

PN	NEMA CONFIGURATION	TYPE	CURRENT RATING	VOLTAGE RATING	DIMENSIONS - INCHES		NOTES
					A	B	
-000	NEMA L14-20	3-POLE 4-WIRE GROUNDING	20 A	125/250 V	2.22	2.75	SEE FIG. 2
-001	NEMA L6-15	2-POLE 3-WIRE GROUNDING	15 A	250 V	1.53	1.91	SEE FIG. 3
-002	NEMA L5-15	2-POLE 3-WIRE GROUNDING	15 A	125 V	1.53	1.91	SEE FIG. 4
-003	NEMA L14-30	3-POLE 4-WIRE GROUNDING	30 A	125/250 V	2.22	2.75	SEE FIG. 2
-004	NEMA L6-15	2-POLE 3-WIRE GROUNDING	30 A	250 V	1.53	1.91	SEE FIG. 3

PART NUMBERING

DESCRIPTION: LOCKING PLUG

ELECTRICAL SPECIFICATION:  
SEE PN TABLE

MATERIAL SPECIFICATION:  
PLUG MATERIAL: NYLON

MAXIMUM PHYSICAL DIMENSION:  
SEE FIG AND TABLE

MANUFACTURING PROCESS REQUIREMENTS:  
AUTO-INSERTABLE: NO  
SOLDERABILITY: HAND SOLDER  
CLEANING RESTRICTION: DO NOT IMMURSE  
ESD CLASSIFICATION: N/A

REVISION CONTROL			
REV	EGRN	DATE	BY
BBO	90106744	11/07	BS
	Prapulla		APPRV
ENGINEERING			
Approved		Prapulla	
Date		11/07	
Engineer ANAND GOGATE			
Drawn By		SUBASH .B	
Date			
<b>GE Transportation Systems</b> <i>Global Signaling</i>			
Argo and Dillingham Rds, Grain Valley, MO 64029			
Title PLUG LOCKING			
Drawing No.		132286-XXX	
Sheet		1 of 1	