



GENERAL NOTES:

1. ALL COSTS INVOLVED WITH THE CONSTRUCTION OF THIS FENCE, INCLUDING LABOR, MATERIALS, HARDWARE, EXCAVATION FOR POST HOLES AND PRESERVATIVE SHALL BE PAID WITH ITEM EST. 40 WOOD BARRIER, MODIFIED.
2. THE METHOD OF DETERMINING THE AREA OF FENCE SHALL BE THE LENGTH OF FENCE (IN FEET) MULTIPLIED BY 6 FEET, WHICH WILL BE THE PREDETERMINED HEIGHT.
3. THE PRESERVATIVE SHALL BE IN ACCORDANCE WITH STANDARD SPECIFICATION 726.06, TYPE IV.
4. LUMBER DIMENSIONS ARE FINAL IN-PLACE DIMENSIONS. LUMBER SHALL BE PLANED ON ALL FOUR SIDES.
5. CEDAR BOARDS SHALL HAVE PRESERVATIVE APPLIED TO ALL FOUR SIDES.

Stationing at Noise Office Modified
 Rev. 4/76 FSO ~ Rev. 4/77 100 LP
 Rev. 10/1/00 ~ Rev. 10/2/00 LP
 Rev. 10/1/00 ~ Rev. 10/1/00 LP
 Rev. 10/1/00 ~ Rev. 10/1/00 LP

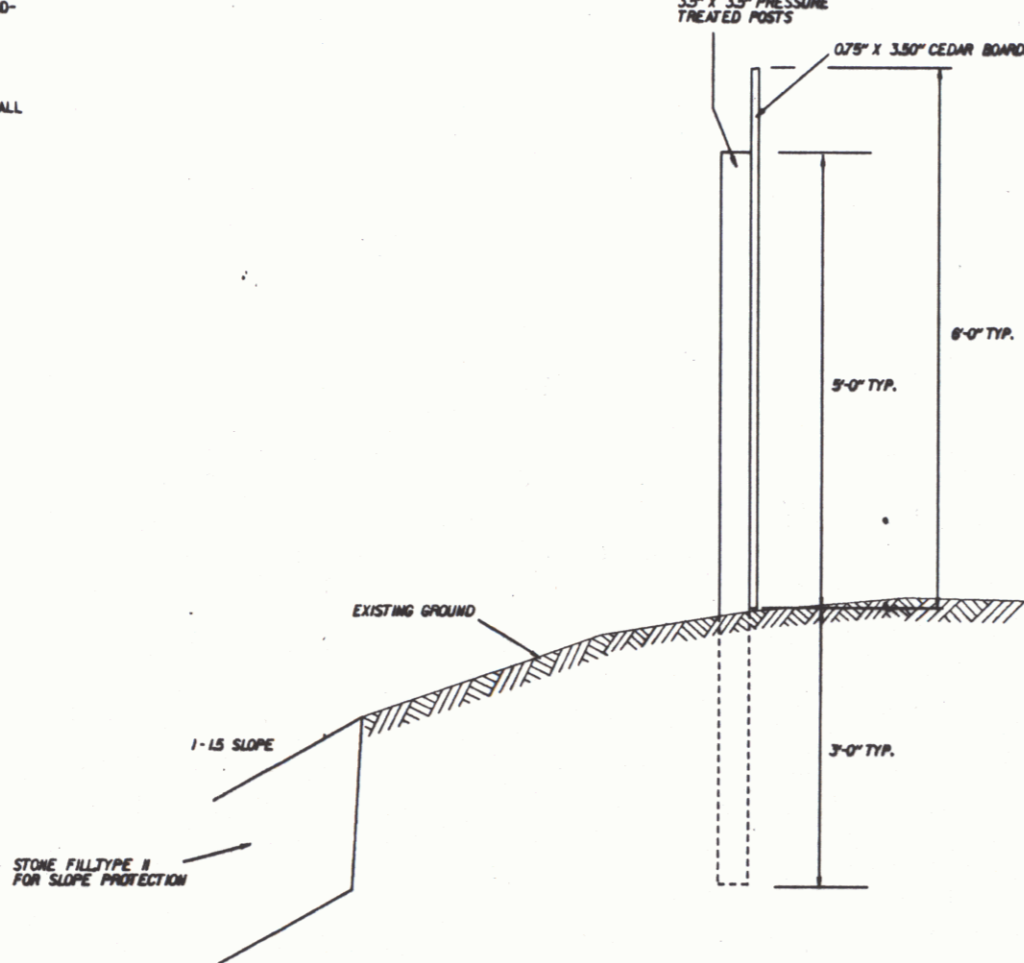

8' CHAIN-LINK FENCE
 SEE STANDARDS F-2, F-3 AND F-4
 FOR DETAILS.
 CHAIN-LINK FENCE SHOULD BUTT
 AS CLOSE AS POSSIBLE TO THE
 END OF THE WOODEN FENCE.

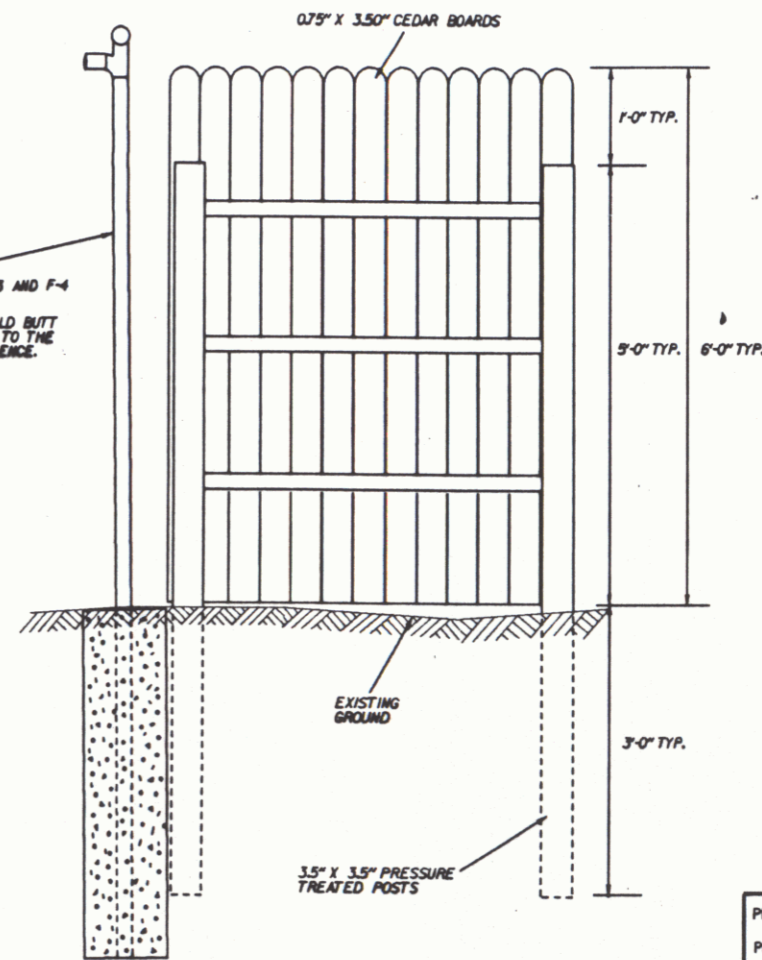

WOODEN FENCE DETAIL SHEET

PROJ. NAME NEWFANE
 PROJ. NO. F 015-1 (16)
 R.O.W. SHEET 3A OF 12

848022F#

DEC 2 1996

4