

## GRAVITY SOLUTIONS NO GEOGRID OR TIE-BACKS IN MANY APPLICATIONS

### TOP BLOCK

Weight: 1225 lbs.  
46" x 28" x 18" High  
5.75 sq. ft. of face

LIMESTONE



COBBLESTONE



LEDGESTONE




### MIDDLE BLOCK

Weight: 2400 lbs.  
46" x 41" x 18" High  
5.75 sq. ft. of face



### BOTTOM BLOCK

Weight: 2500 lbs.  
46" x 41" x 18" High  
5.75 sq. ft. of face

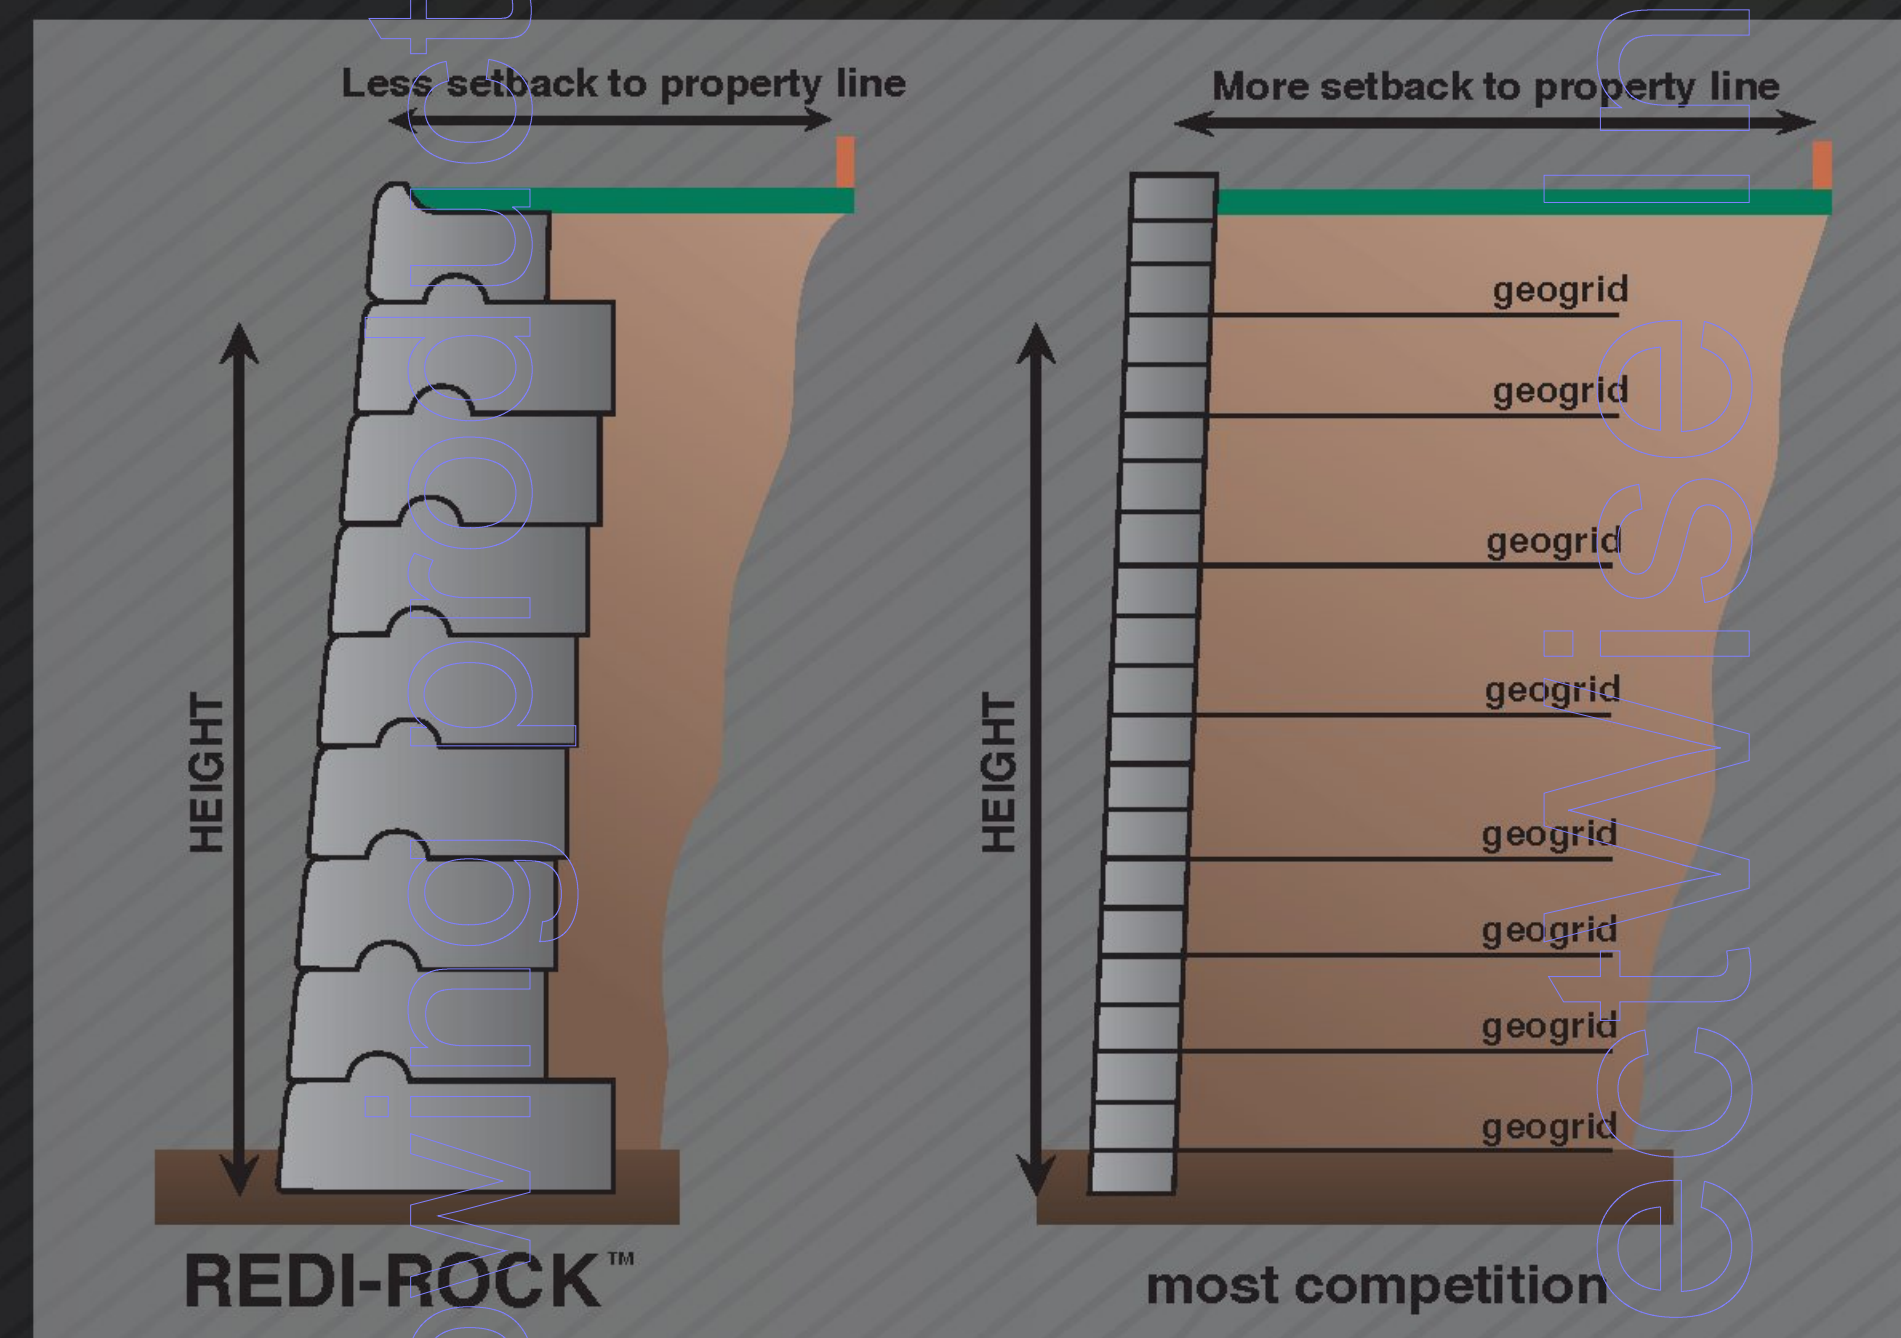

## REINFORCED SOLUTIONS BUILD EVEN TALLER WALLS

### REDI-ROCK'S POSITIVE CONNECTION (PC) SYSTEM



Weight: 1540 lbs.  
46" x 28" x 18" High  
5.75 sq. ft. of face

### AVAILABLE IN ALL THREE TEXTURES

- Provides superior seismic performance over other geosynthetic reinforced wall systems
- Utilizes a corrosion-free reinforcement system without special connection components
- Increases wall height with reduced geosynthetic reinforcement requirements
- Incorporates a massive, ¾ ton, precast concrete block facing unit
- Addresses the long term connection requirements in the AASHTO LRFD specifications

LIMESTONE



COBBLESTONE



LEDGESTONE

