


866.DIP.PIP



# TYTON JOINT® Pipe

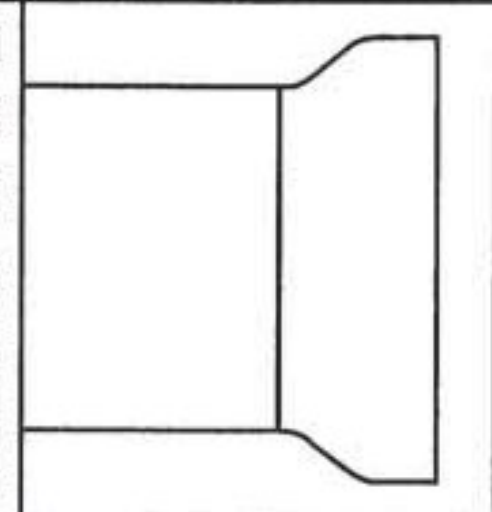

2013 EDITION

P 14

## Thickness Class – Thicknesses, Dimensions and Weight (cont.)

SIZE Inches	THICKNESS CLASS	THICKNESS Inches	OUTSIDE DIAMETER* Inches	18-FOOT LAYING LENGTH		20-FOOT LAYING LENGTH	
				BARREL WEIGHT PER FOOT Pounds	WEIGHT PER LENGTH† Pounds	WEIGHT PER LENGTH† Pounds	WEIGHT PER LENGTH† Pounds
10	50	0.29	11.10	30.1	570	630	
10	51	0.32	11.10	33.2	625	690	
10	52	0.35	11.10	36.2	680	750	
10	53	0.38	11.10	39.2	730	810	
10	54	0.41	11.10	42.1	785	870	
10	55	0.44	11.10	45.1	840	930	
10	56	0.47	11.10	48.0	890	990	
12	50	0.31	13.20	38.4	725	800	
12	51	0.34	13.20	42.0	790	875	
12	52	0.37	13.20	45.6	855	945	
12	53	0.40	13.20	49.2	920	1015	
12	54	0.43	13.20	52.8	985	1090	
12	55	0.46	13.20	56.3	1045	1160	
12	56	0.49	13.20	59.9	1110	1230	
14	50	0.33	15.30	47.5	910	1005	
14	51	0.36	15.30	51.7	985	1090	
14	52	0.39	15.30	55.9	1060	1170	
14	53	0.42	15.30	60.1	1135	1255	
14	54	0.45	15.30	64.2	1210	1340	
14	55	0.48	15.30	68.4	1285	1420	
14	56	0.51	15.30	72.5	1360	1505	
16	50	0.34	17.40	55.8	1065	1175	
16	51	0.37	17.40	60.6	1150	1275	
16	52	0.40	17.40	65.4	1240	1370	
16	53	0.43	17.40	70.1	1325	1465	
16	54	0.46	17.40	74.9	1410	1560	
16	55	0.49	17.40	79.7	1495	1655	
16	56	0.52	17.40	84.4	1580	1750	

NOTE: Thicknesses and dimensions of 3" through 64" Ductile Iron pipe conform to ANSI/AWWA C151/A21.51. Weights may vary from the standard because of differences in bell weights.

\*Tolerance of O.D. of spigot end: 3-12 in., ±0.06 in.; 14-24 in., +0.05 in., -0.08 in.; 30-48 in., +0.08 in., -0.06 in.; 54-64 in., +0.04 in., -0.10 in.

† Including bell; calculated weight of pipe rounded off to nearest 5 lbs.

Table continued on next page.