

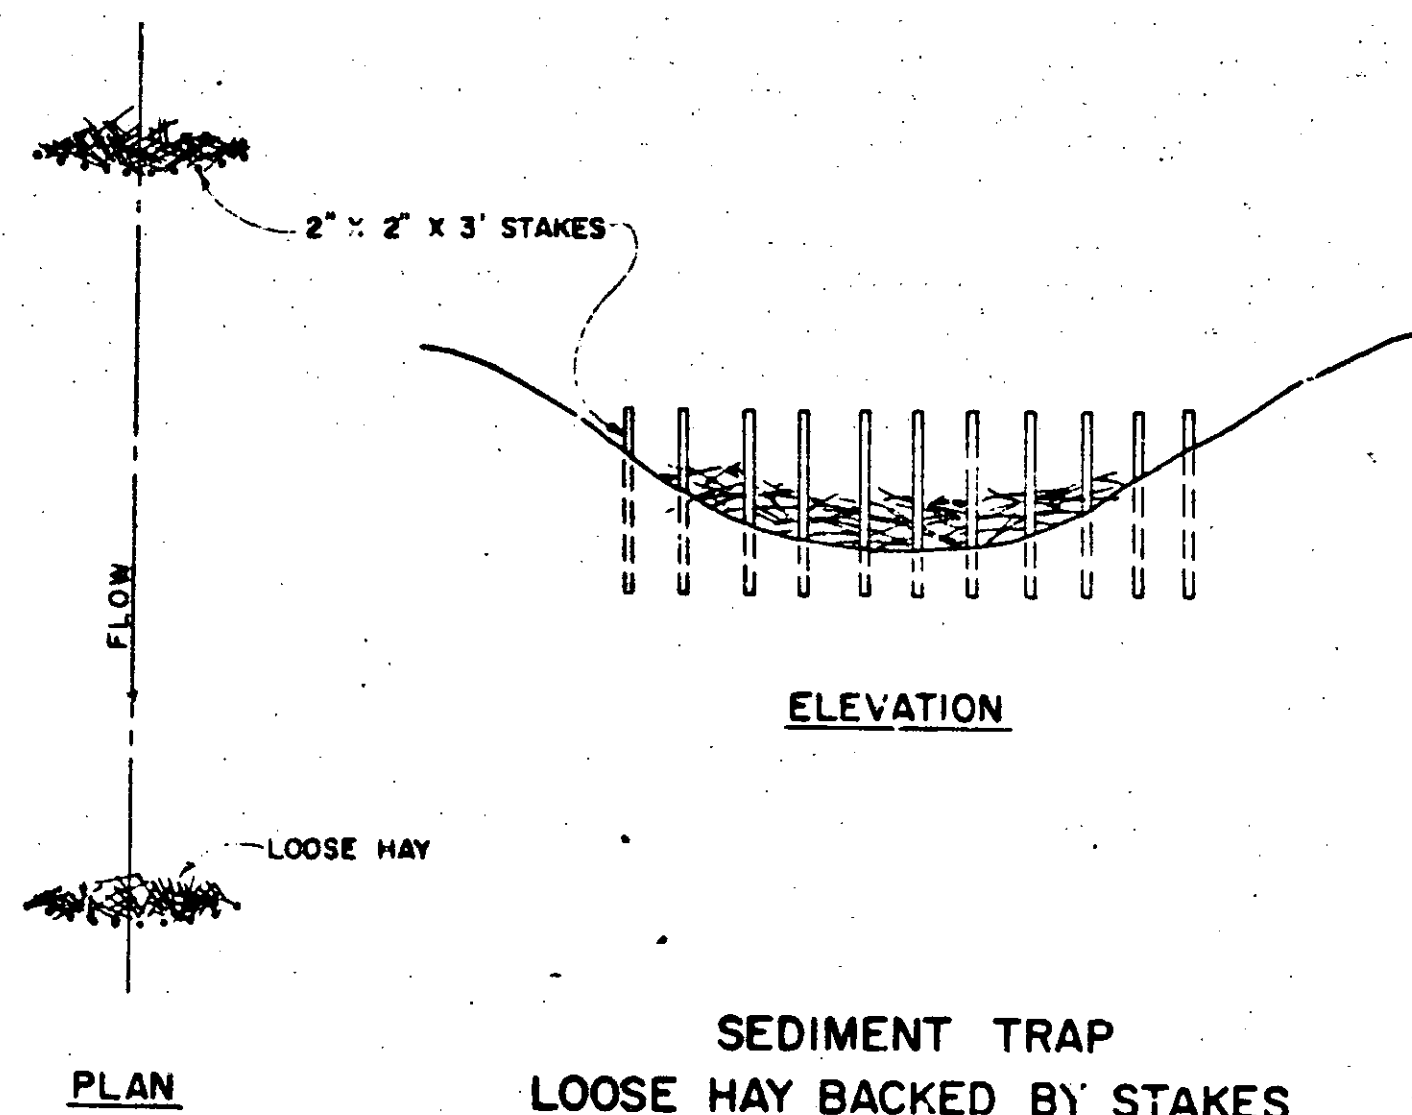
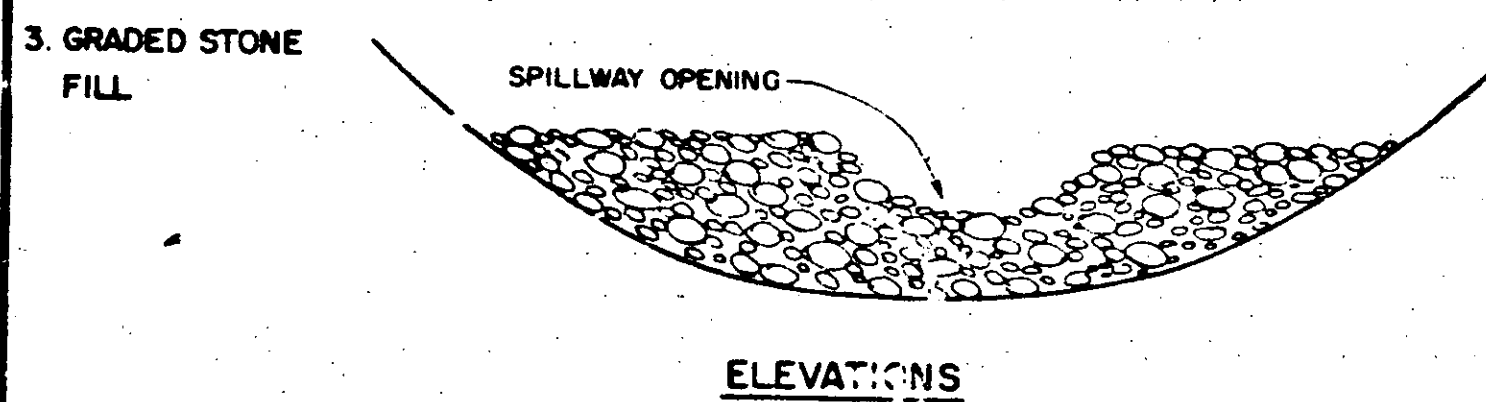



SECTIONS A-A
PROTECTION AT STREAM CROSSING
MEDIAN AND SIDE DITCHES

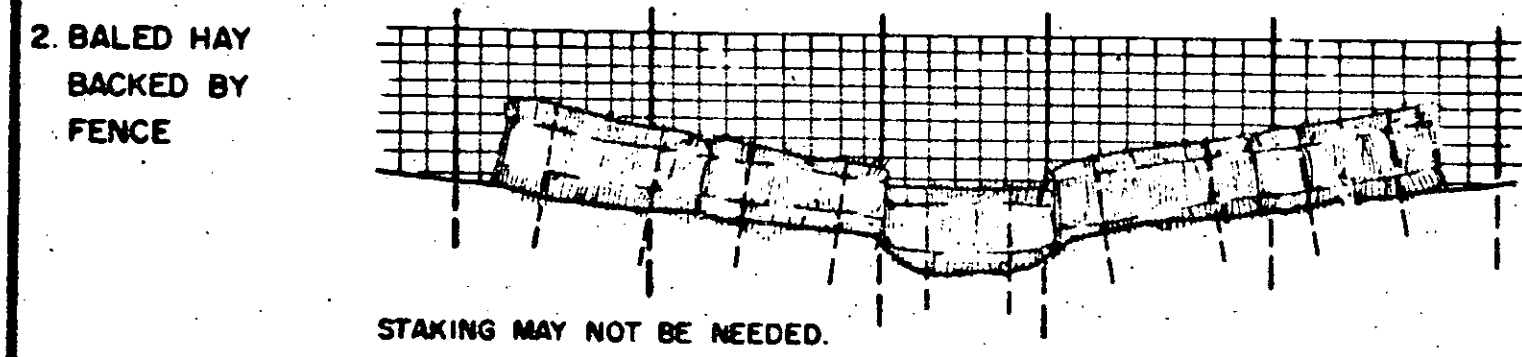


SEDIMENT TRAP
LOOSE HAY BACKED BY STAKES

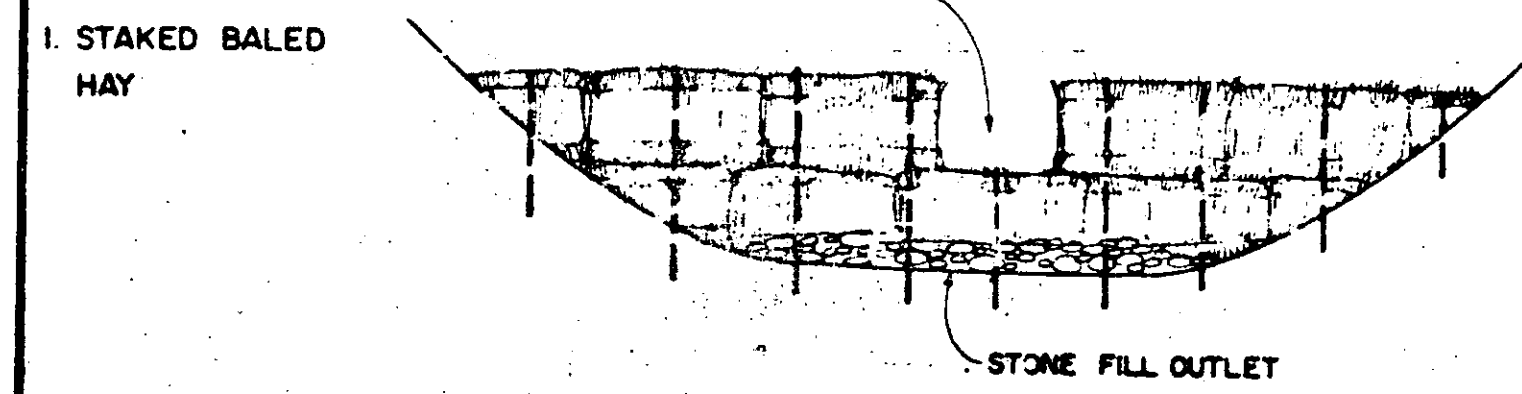

TYPES OF TEMPORARY DAMS
DAM SHOULD EXTEND FAR ENOUGH UP DITCH SIDE SLOPES TO EFFECTIVELY POND THE RUNOFF AND PREVENT EROSION AND WASHOUT.

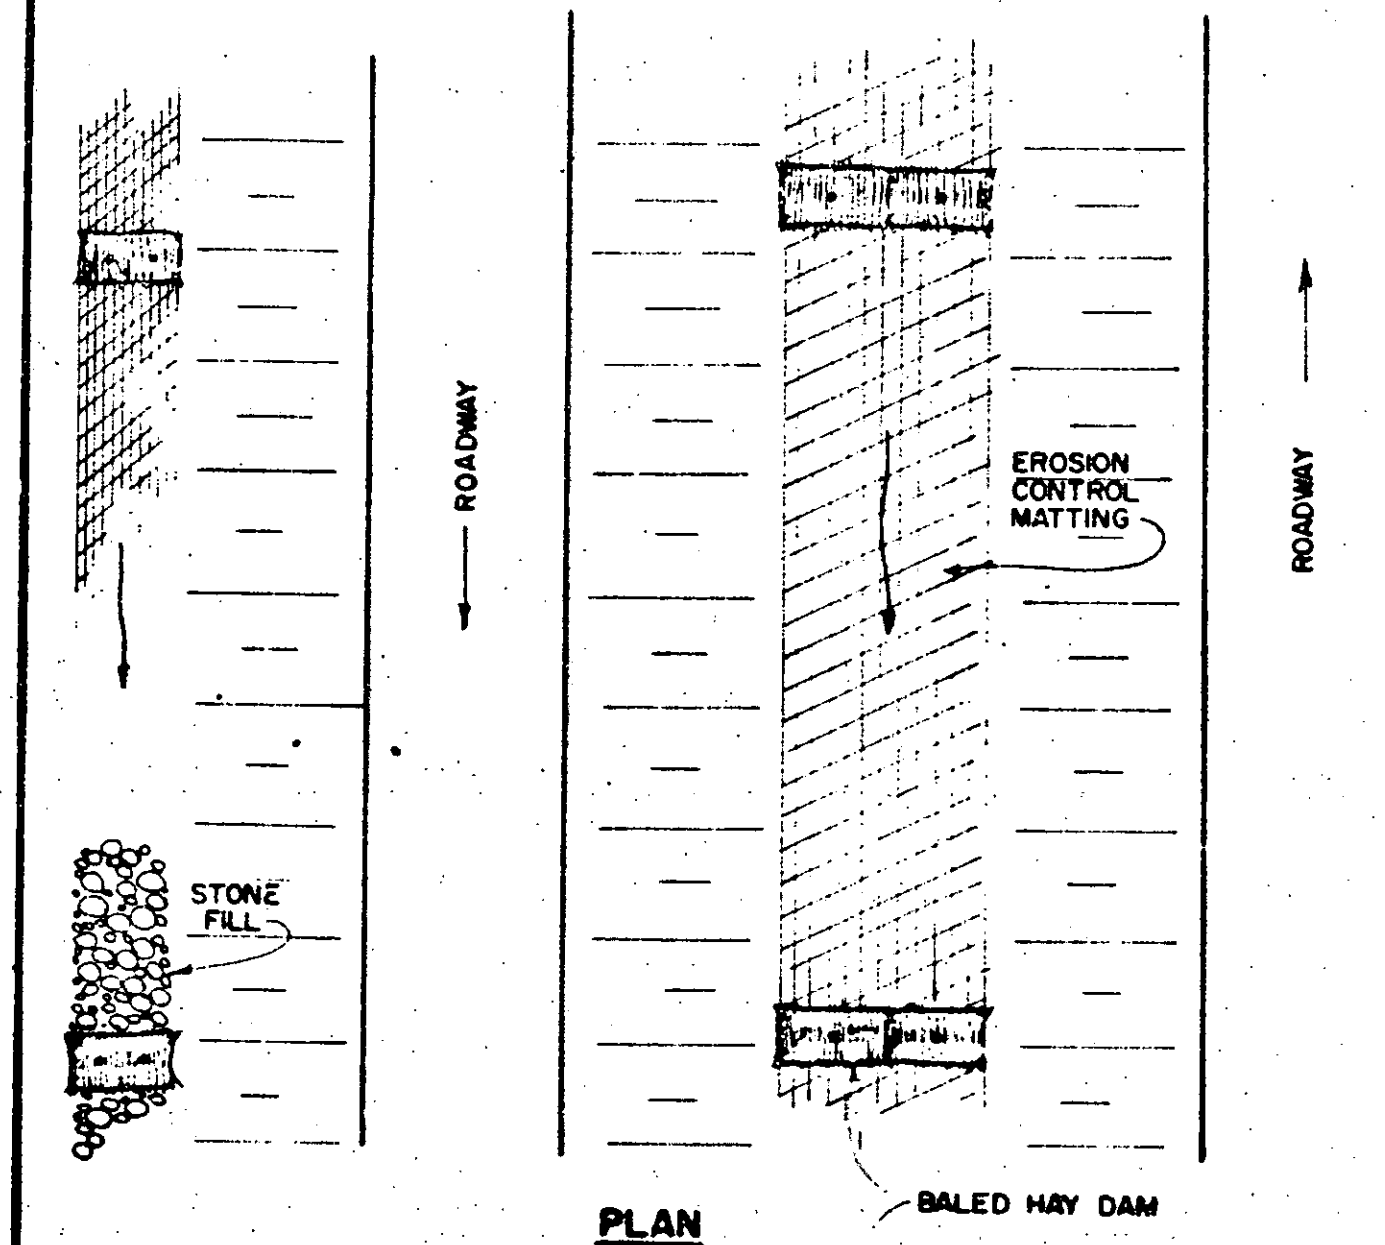


BALED HAY DAMS USED IN DITCHES


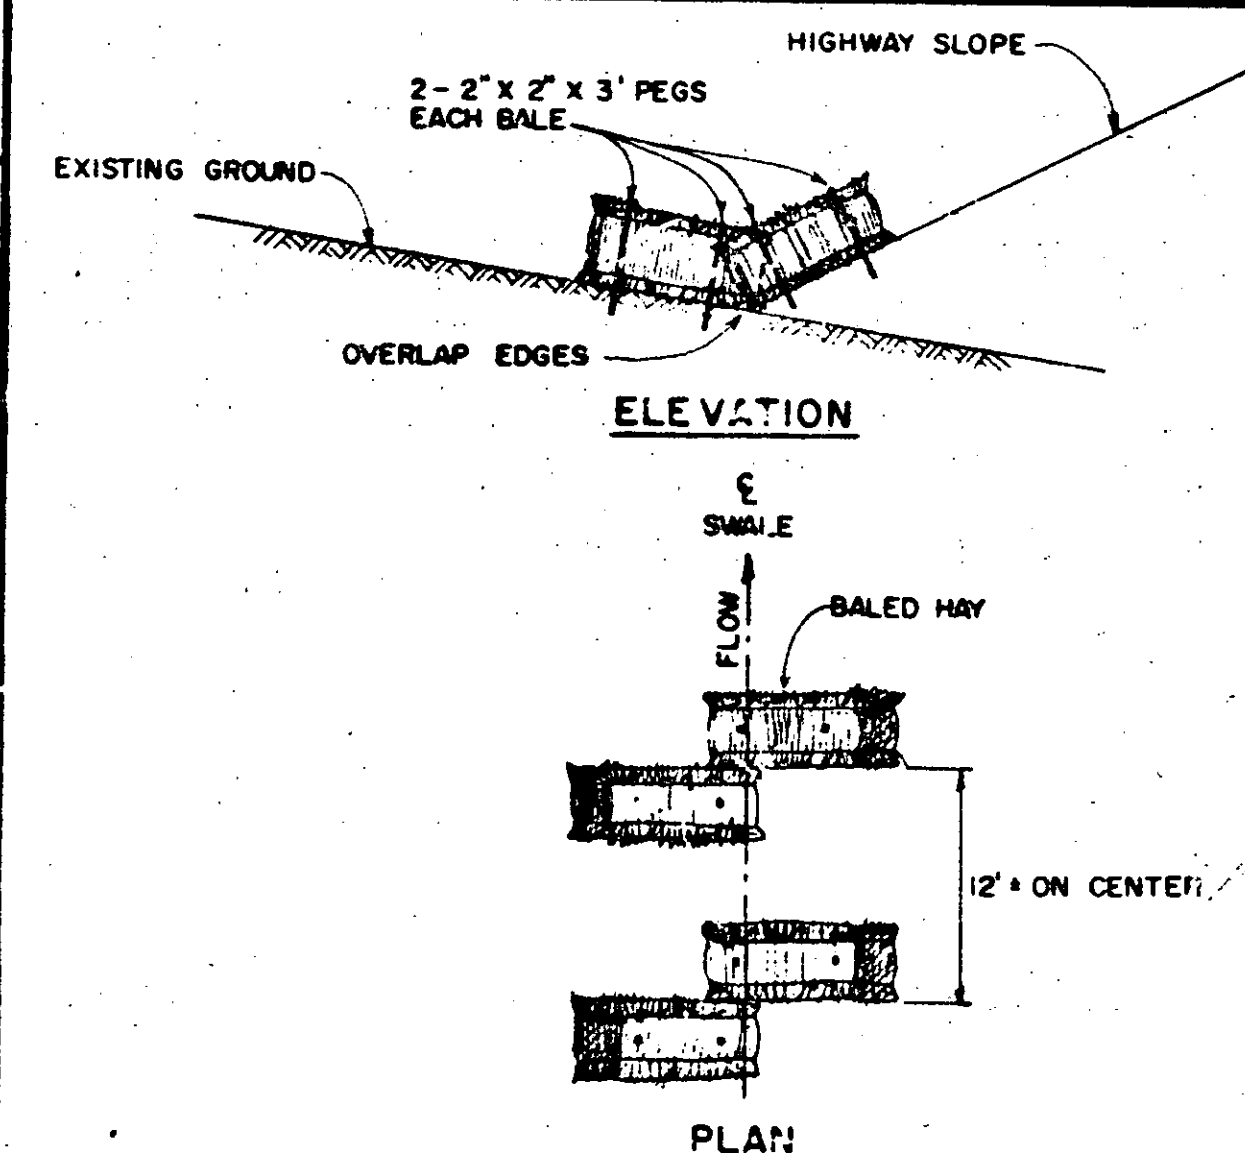


TO BE USED IN LOCATIONS WHERE THE EXISTING GROUND SLOPES IN TOWARD THE EMBANKMENT. BALES WILL BE ALLOWED TO ROT IN PLACE.

BALED HAY EROSION CHECKS

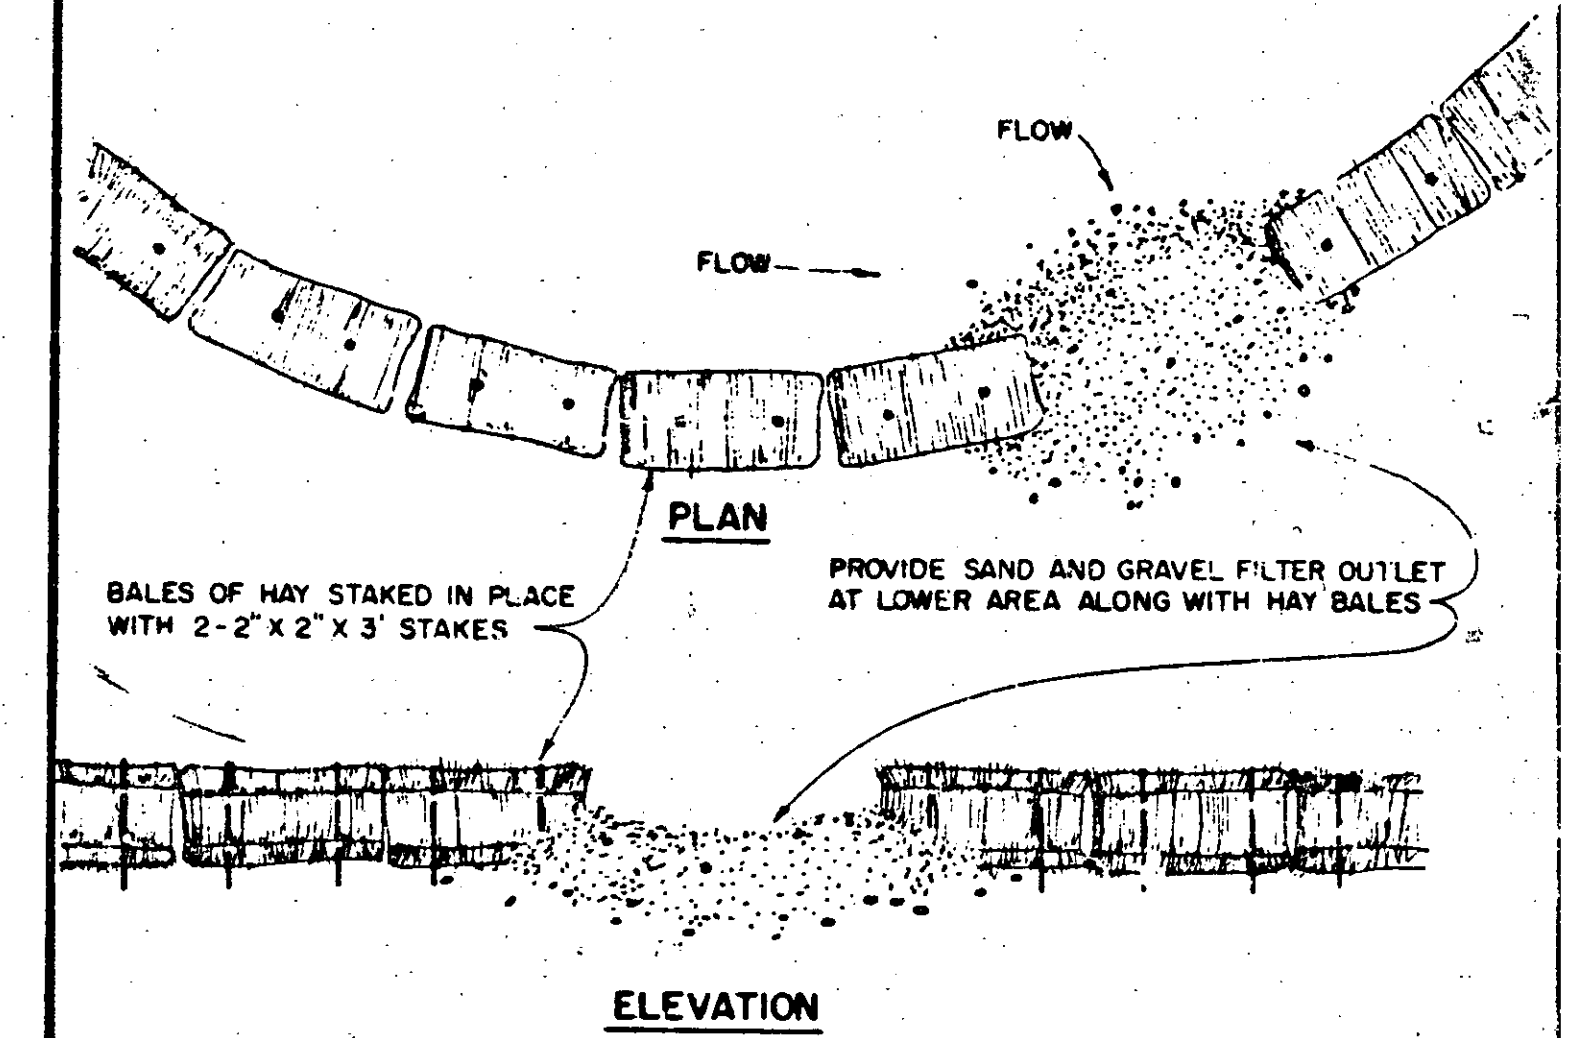

BALED HAY DAMS ALONG TOE OF SLOPE

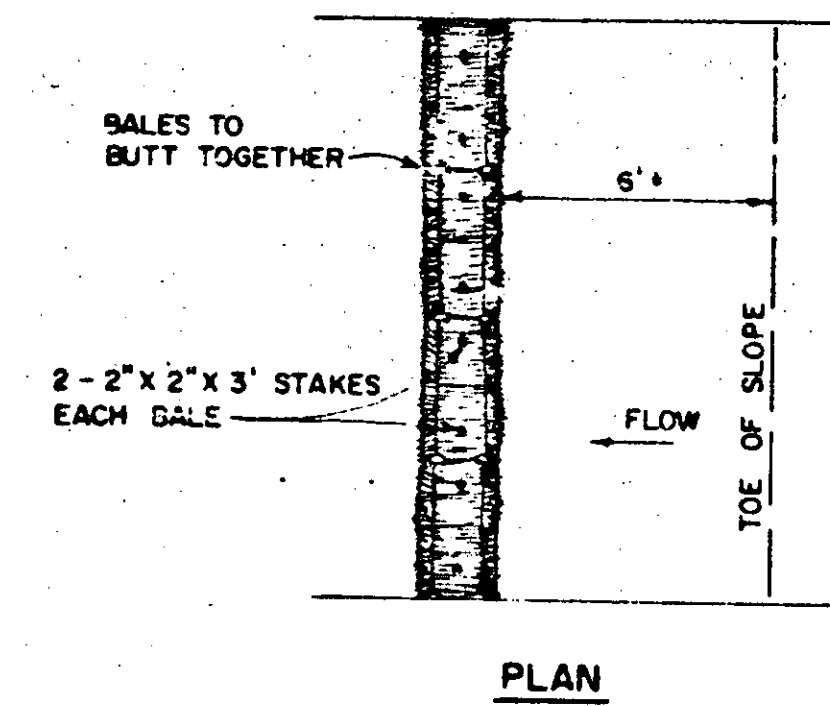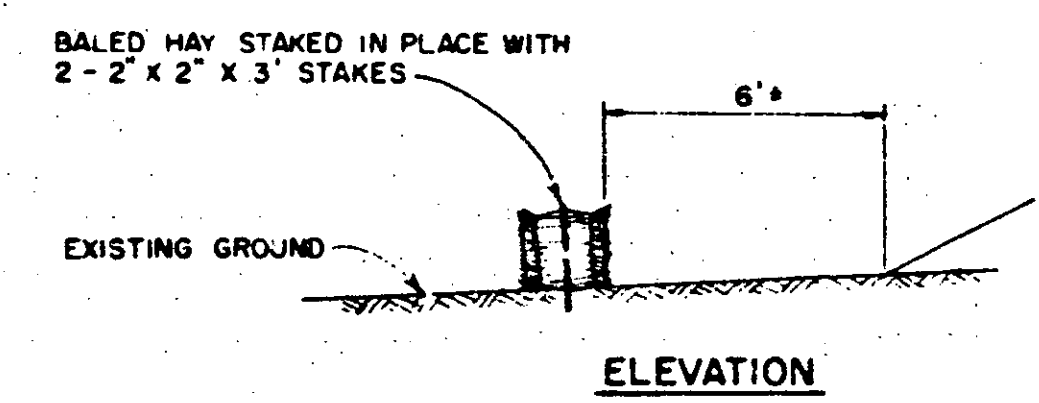

TO BE USED WHERE THE EXISTING GROUND SLOPES AWAY FROM THE HIGHWAY EMBANKMENT.

BALED HAY EROSION CHECKS

CORRECTIONS & REVISIONS

APPROVED

July 5, 1972
DATE
R. W. C. [Signature]
CHIEF ENGINEER
ASST. CHIEF ENGINEER
G. W. Lane [Signature]
HIGHWAY ENGINEER

TEMPORARY EROSION CONTROL DETAILS

VERMONT DEPARTMENT OF HIGHWAYS STANDARD