




• REDUCE SPACING 50 %
LINE 3 ALTERNATE - 16,000
VB-017

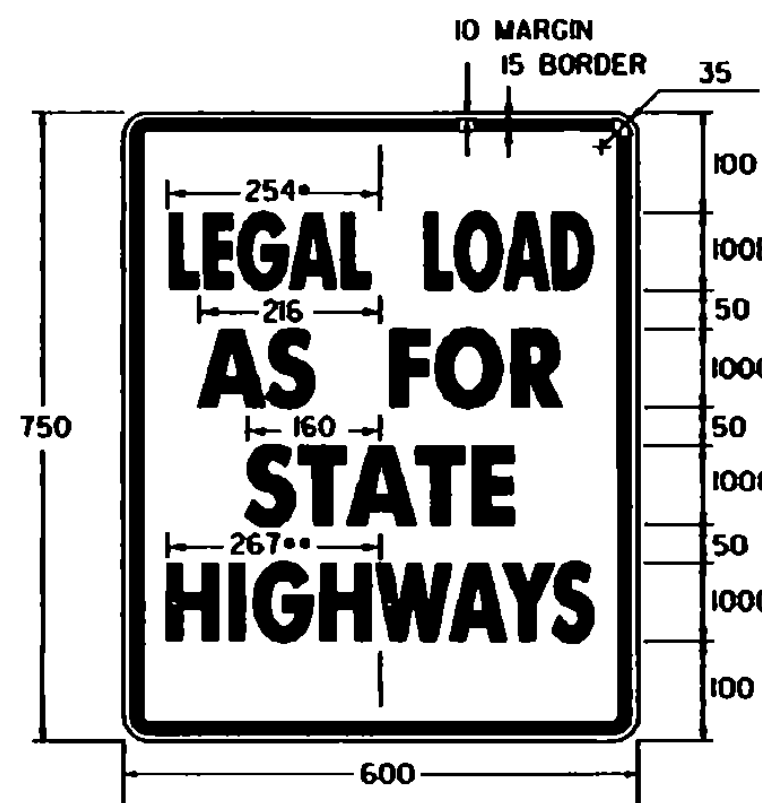


• REDUCE SPACING 50 %
•• REDUCE SPACING 16 %
VB-079

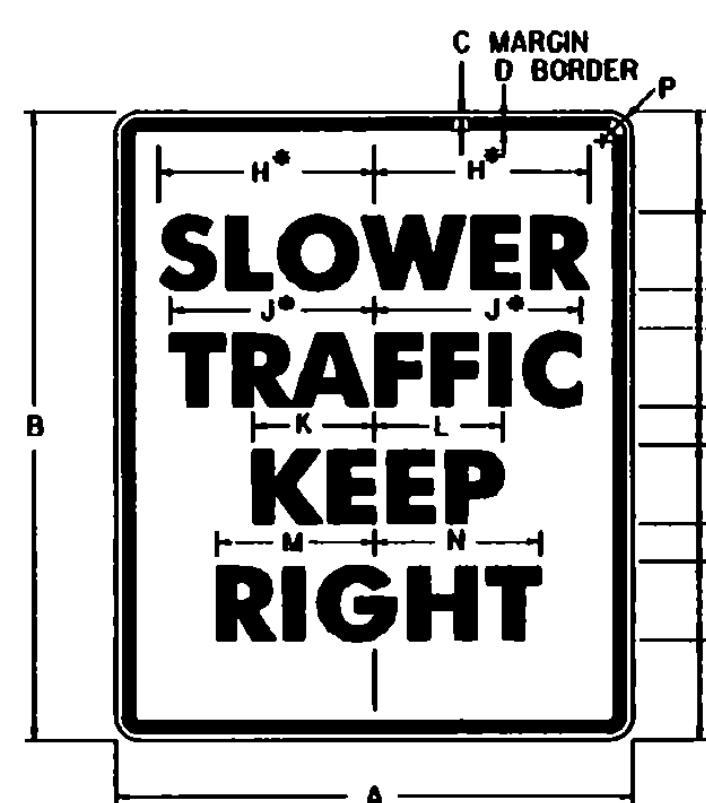


• REDUCE SPACING 25 %
B4-3

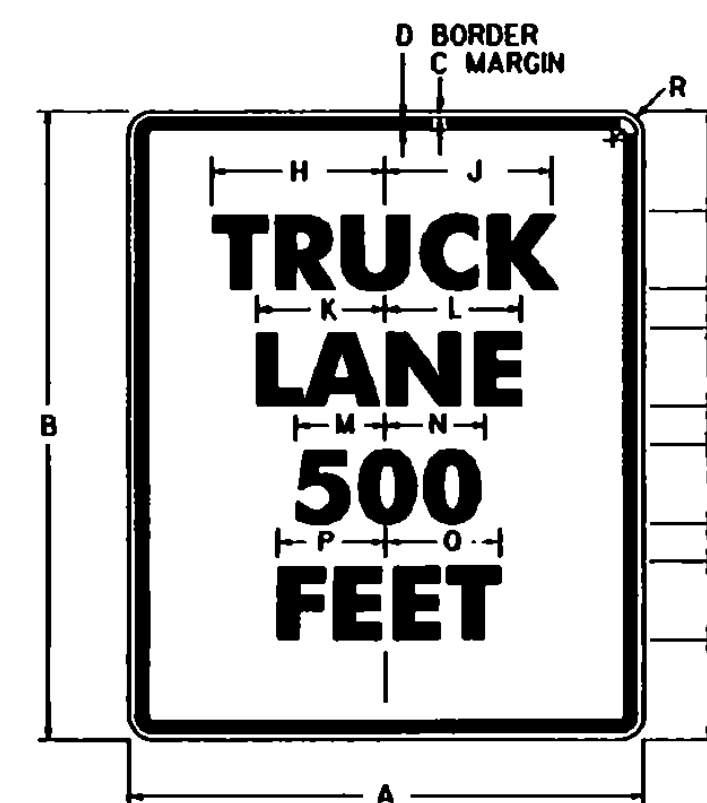

B4-6

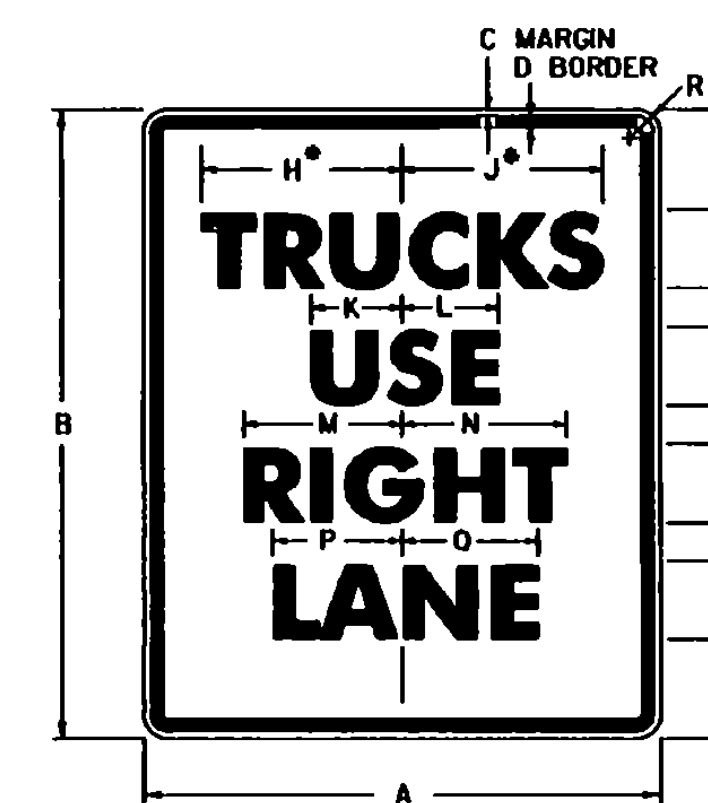


• REDUCE SPACING 32 %
B4-5

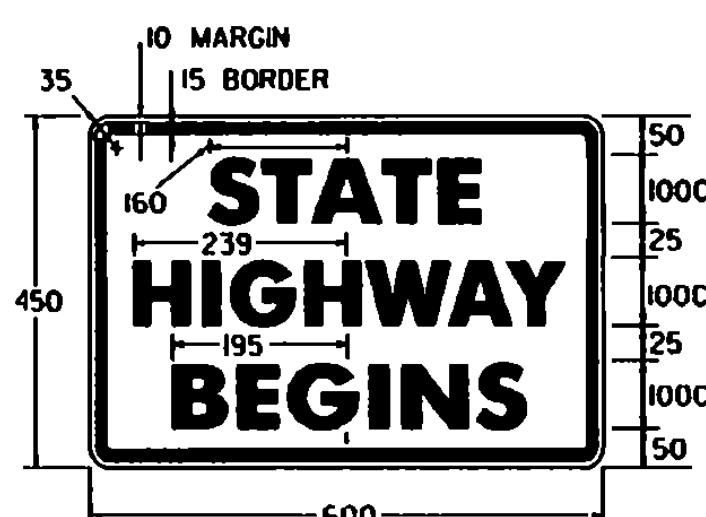


VB-039



VB-038

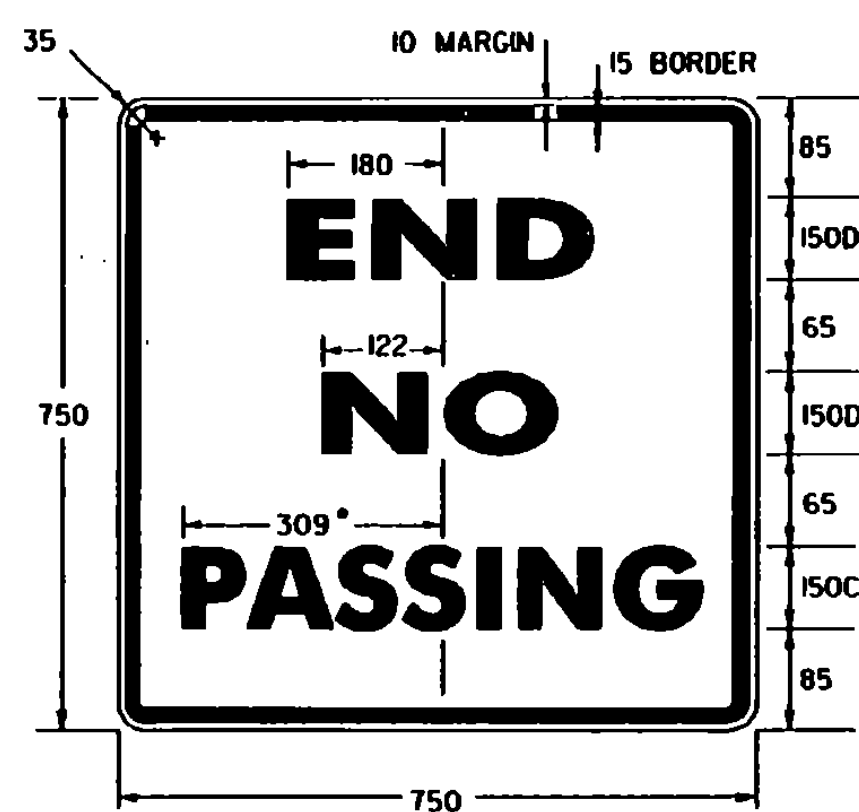


• REDUCE SPACING 50 %
VB-417

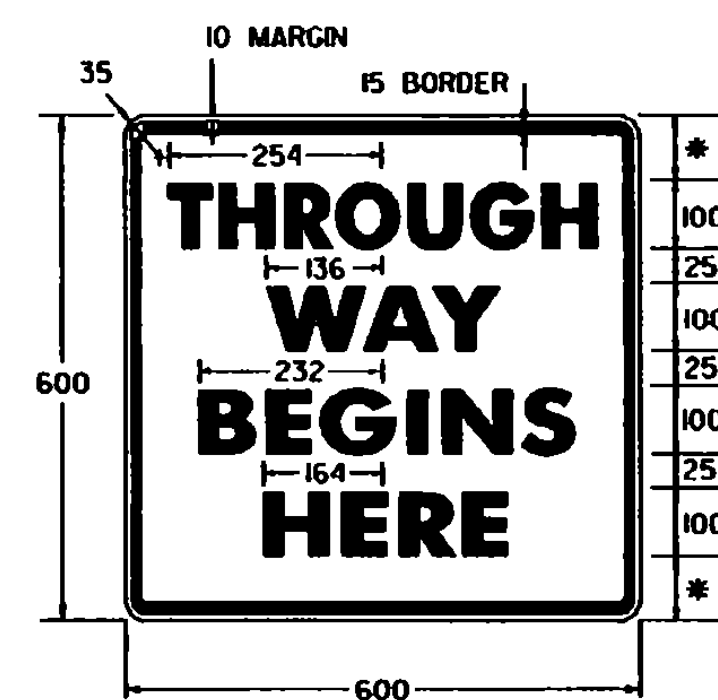


VB-041
* EQUAL DIMENSIONS



VB-040

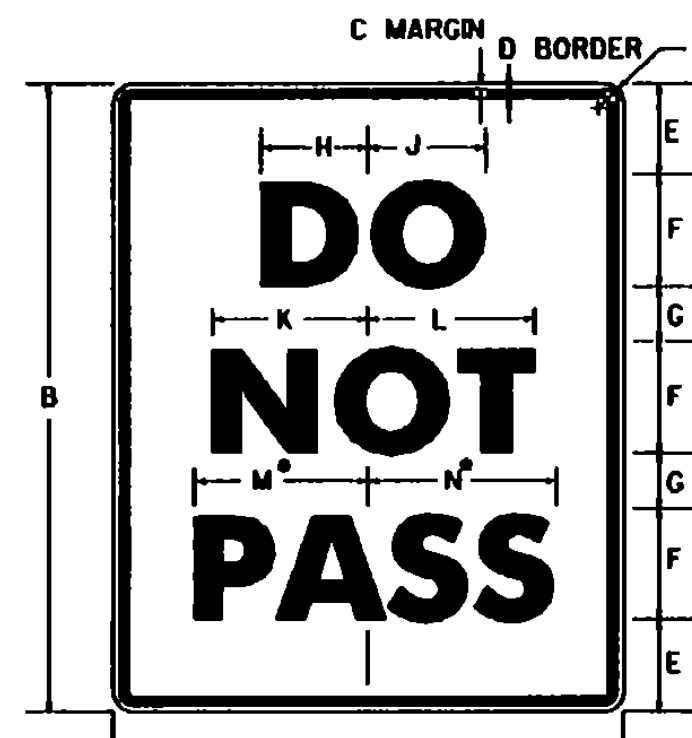

• REDUCE SPACING 40 %
B4-1

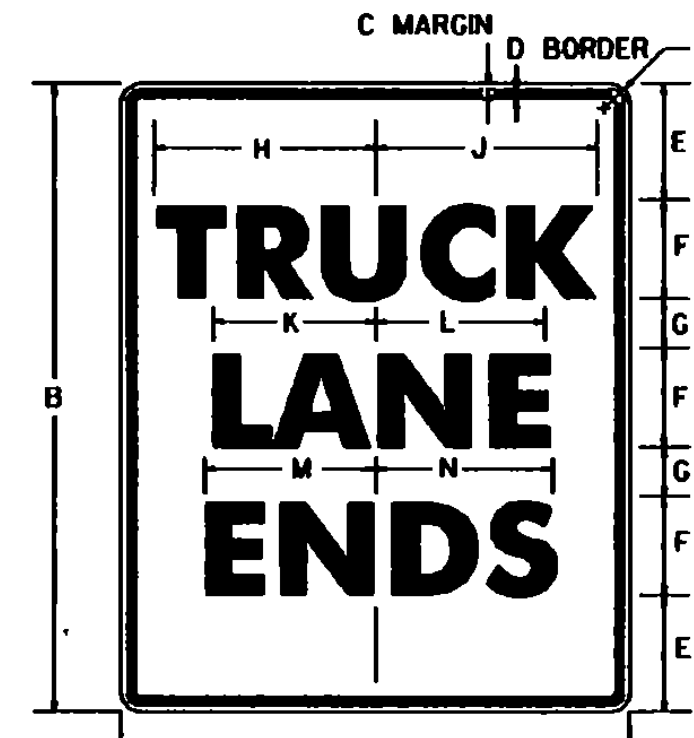

VB-186

SIGN	DIMENSIONS (mm)															
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
STD.	600	750	10	15	85	1000	60	248	254	152	167	180	193	35		
EXPWY.	900	1200	15	20	150	1500	100	371	381	228	249	270	289	55		
FWY.	1200	1500	20	30	185	2000	110	495	508	305	334	361	388	75		

SIGN	DIMENSIONS (mm)															
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
STD.	600	750	10	15	85	1000	60	249	246	191	196	143	148	175	181	35
EXPWY.	900	1200	15	20	150	1500	100	373	368	286	292	215	222	262	271	55
FWY.	1200	1500	20	30	185	2000	110	497	491	382	389	287	295	349	359	75

SIGN	DIMENSIONS (mm)															
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
STD.	600	750	10	15	85	1000	60	242	233	119	127	180	193	158	168	35
EXPWY.	900	1200	15	20	150	1500	100	362	350	179	190	270	289	237	253	55
FWY.	1200	1500	20	30	185	2000	110	486	469	240	254	361	388	317	337	75

COLORS:

THE REGULATORY SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT ON REFLECTORIZED WHITE BACKGROUND, UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

MATERIALS:

THE SIGN BASE MATERIALS USED FOR REGULATORY SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

600 X 450	
600 X 600	
600 X 750	900 X 1200
750 X 750	1200 X 1500

FLAT SHEET ALUMINUM
HIGH DENSITY OVERLAID PLYWOOD
GALVANIZED FLAT SHEET STEEL

2.03 mm	2.54 mm
13 mm	16 mm
1.63 mm	2.01 mm

THE REFLECTIVE MATERIAL FOR GROUND MOUNTED SIGNS SHALL BE AASHTO TYPE 11 OR 111 WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE TEXT OF THE SIGNS MAY BE LETTERING FILM, SILK SCREENED OR HAND PAINTED. HAND PAINTING MUST BE COMPARABLE IN QUALITY TO THE RESULTS OBTAINED BY SILK SCREENING.

SPECIFICATIONS:

REGULATORY SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS AS PRESCRIBED IN THE VDOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

TEXT DESIGN:

LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS". DESIGNS SHALL CONFORM WITH THOSE PRESCRIBED IN THE PUBLICATION "STANDARD HIGHWAY SIGNS" AS SPECIFIED IN THE MUTCD.

REVISIONS AND CORRECTIONS
JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED


[Signature]
DIRECTOR OF ENGINEERING

[Signature]
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

REGULATORY SIGN
DETAILS

OTHER STDS. NONE
REQUIRED:

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

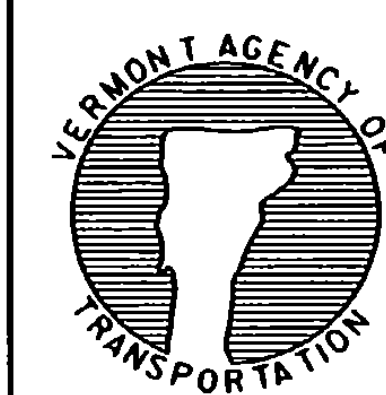

Metric
STANDARD
E-141M