


• OPTICALLY SPACE NUMERALS ABOUT VERTICAL CENTERLINE.
R2-1

SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	L
MIN.	450	600	10	15	75	75E	50	200E	35	182	140
STD.	600	750	10	15	100	100E	50	250E	35	244	187
EXPWY.	900	1200	15	20	150	150E	125	350E	55	365	279
FWY.	1200	1500	20	30	200	200E	100	500E	75	486	372



TO BE USED WITH "SPEED LIMIT 55" OR "65" FWY SIGN ONLY
VR-141

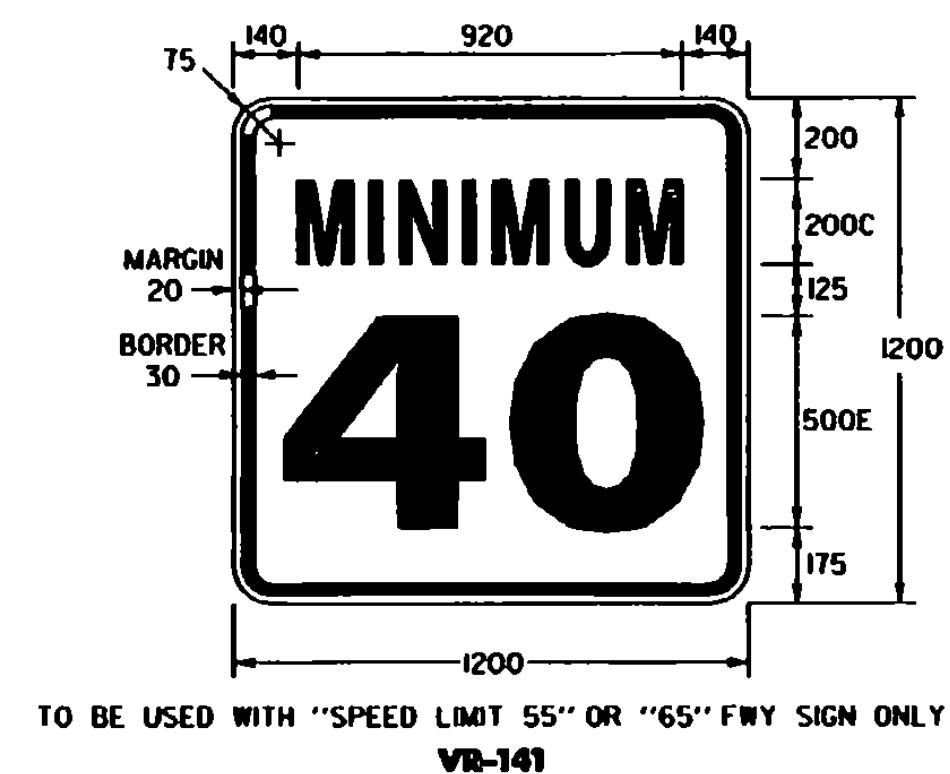


TEXT 100C, SPACING 50
VR-002




TEXT 50C, WITH EQUAL LINE SPACING, EXCEPT WHERE NOTED.
VR-046




• OPTICALLY SPACE NUMERALS ABOUT VERTICAL CENTERLINE.
R2-4

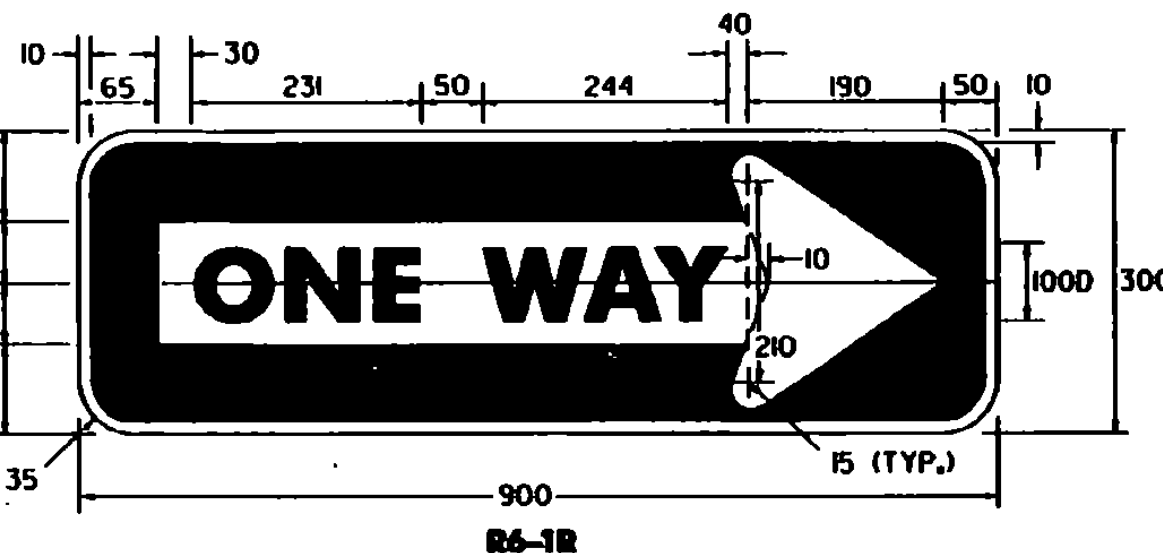


R6-1R

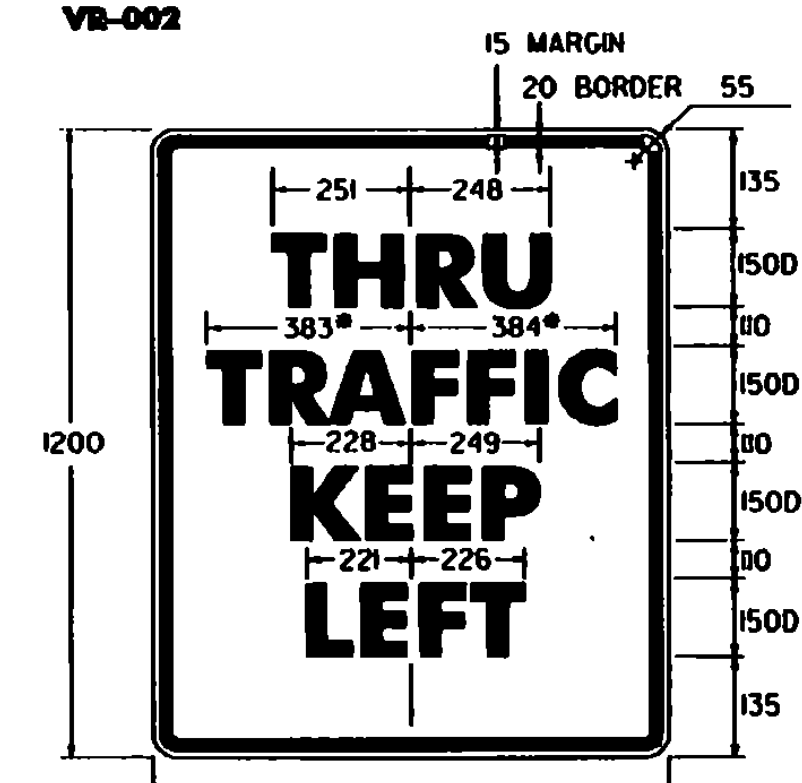

• REDUCE SPACING 25 %
VR-118L

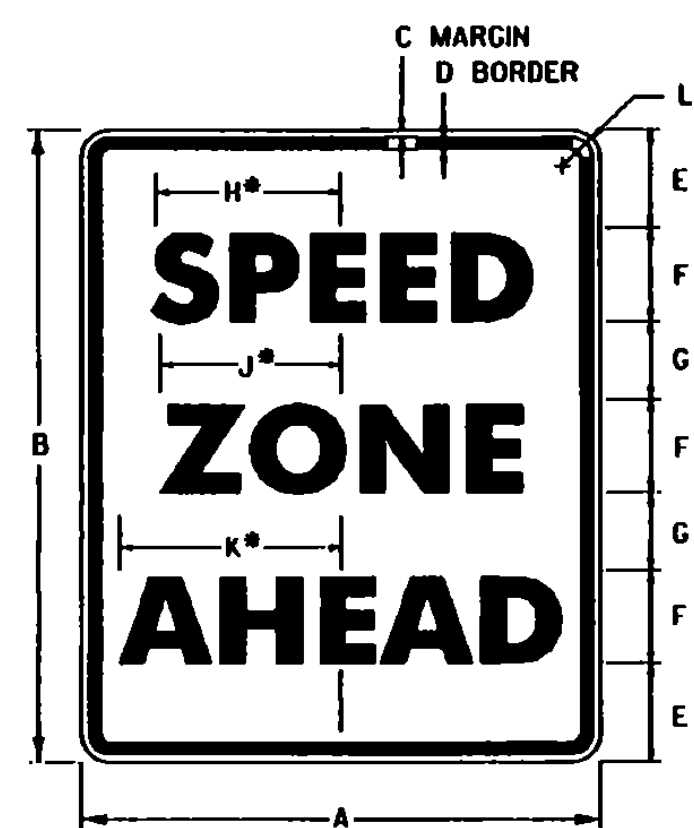


• FOR STD SIZE, REDUCE SPACING 40 %
R2-3C

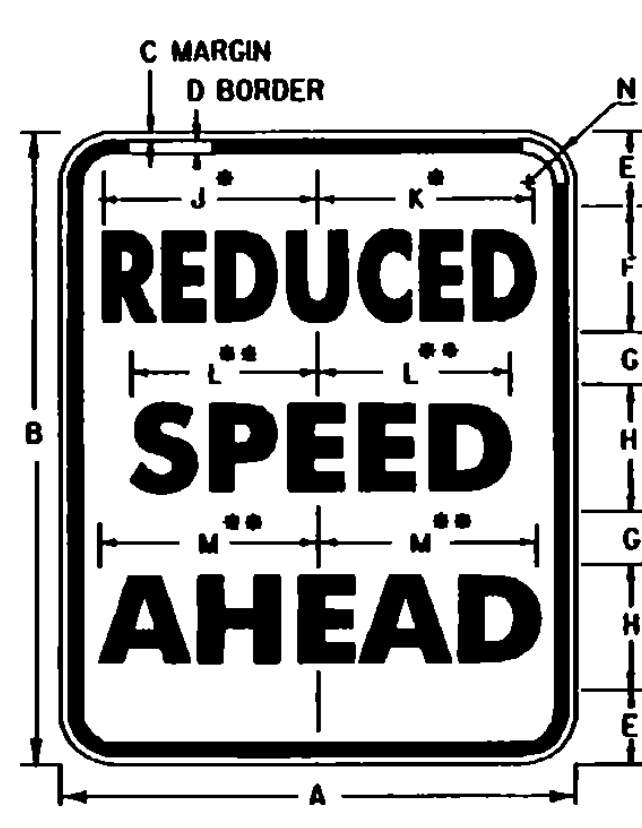

R2-3A

• REDUCE SPACING 50% FOR STD. SIZE AND 25% FOR OTHER SIZES.
•• REDUCE SPACING 40% FOR STD. SIZE.

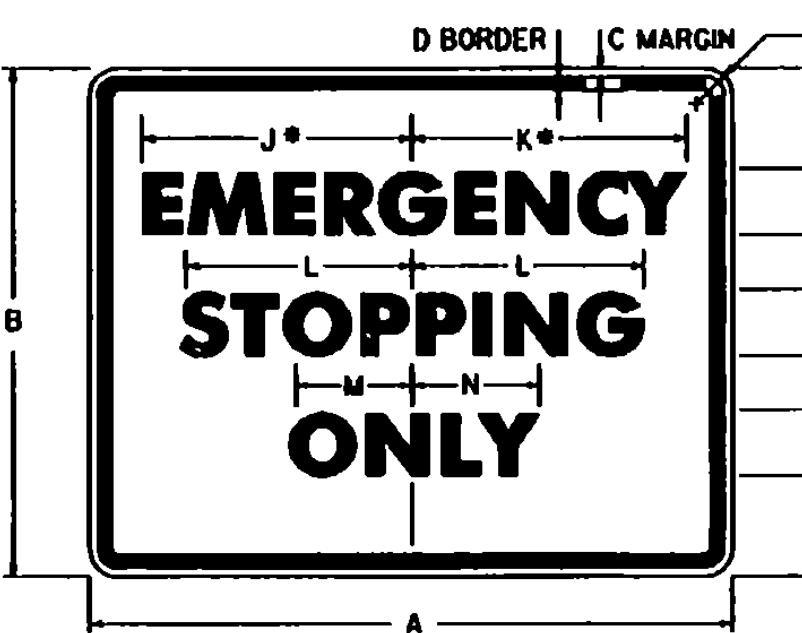

• FOR FWY SIZE, REDUCE SPACING 50 %
R8-7

SIGN	DIMENSIONS (mm)										
	A	B	C	D	E	F	G	H	J	K	L
MIN.	450	600	10	15	85	100C	65	173	141	178	35
STD.	600	750	10	15	85	150C	65	233	192	247	35
EXPWY.	900	1200	15	20	175	200C	125	346	280	356	55
FWY.	1200	1500	20	30	225	250C	150	432	352	445	75

SIGN	DIMENSIONS (mm)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	
MIN.	450	600	10	15	85	100B	65	100C	182	186	173	178	35	
STD.	600	750	10	15	85	150B	65	150C	246	266	235	247	35	
EXPWY.	900	1200	15	20	175	200B	125	200C	361	374	346	356	55	
FWY.	1200	1500	20	30	225	250B	150	250C	450	468	432	445	75	

SIGN	DIMENSIONS (mm)													
	A	B	C	D	E	F	G	H	J	K	L	M	N	P
EXPWY.	750	600	10	15	85	100C	65	100D	318	331	324	163	178	35
FWY.	1200	900	15	20	125	150D	100	150D	517	536	485	249	263	55

COLORS:

THE REGULATORY SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT ON REFLECTORIZED WHITE BACKGROUND, UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

MATERIALS:

THE SIGN BASE MATERIALS USED FOR REGULATORY SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

MATERIAL	900 X 300			900 X 900			900 X 1200			1200 X 900			1200 X 1200			1200 X 1500		
	450 X 600	600 X 750	750 X 600	450 X 600	600 X 750	750 X 600	450 X 600	600 X 750	750 X 600	450 X 600	600 X 750	750 X 600	450 X 600	600 X 750	750 X 600			
FLAT SHEET ALUMINUM	1.52 mm	2.03 mm	2.54 mm	1.52 mm	2.03 mm	2.54 mm	1.52 mm	2.03 mm	2.54 mm	1.52 mm	2.03 mm	2.54 mm	1.52 mm	2.03 mm	2.54 mm			
HIGH DENSITY OVERLAP PLYWOOD	13 mm	16 mm	19 mm	13 mm	16 mm	19 mm	13 mm	16 mm	19 mm	13 mm	16 mm	19 mm	13 mm	16 mm	19 mm			
GALVANIZED FLAT SHEET STEEL	1.32 mm	1.63 mm	2.01 mm	1.32 mm	1.63 mm	2.01 mm	1.32 mm	1.63 mm	2.01 mm	1.32 mm	1.63 mm	2.01 mm	1.32 mm	1.63 mm	2.01 mm			

THE REFLECTIVE MATERIAL FOR GROUND MOUNTED SIGNS SHALL BE AASHTO TYPE II OR III WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE TEXT OF THE SIGNS MAY BE LETTERING FILM, SILK SCREENED OR HAND PAINTED. HAND PAINTING MUST BE COMPARABLE IN QUALITY TO THE RESULTS OBTAINED BY SILK SCREENING.

SPECIFICATIONS:

REGULATORY SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS AS PRESCRIBED IN THE VADT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

TEXT DESIGN:


LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS". DESIGNS SHALL CONFORM WITH THOSE PRESCRIBED IN THE PUBLICATION "STANDARD HIGHWAY SIGNS" AS SPECIFIED IN THE MUTCD.

REVISIONS AND CORRECTIONS
JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED

[Signature]
DIRECTOR OF ENGINEERING
[Signature]
DIRECTOR OF CONSTRUCTION AND MAINTENANCE

REGULATORY SIGN
DETAILS

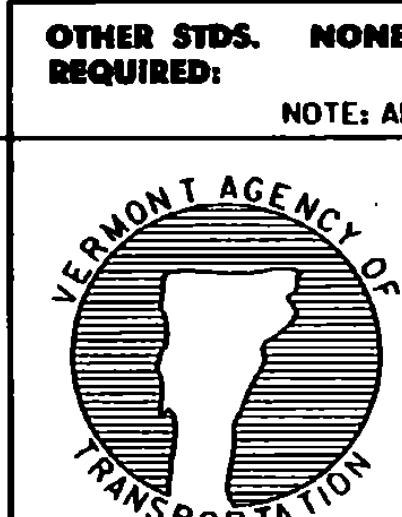

OTHER STDS. NONE
REQUIRED:
NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.
Metric
STANDARD
E-142M