




PLAN

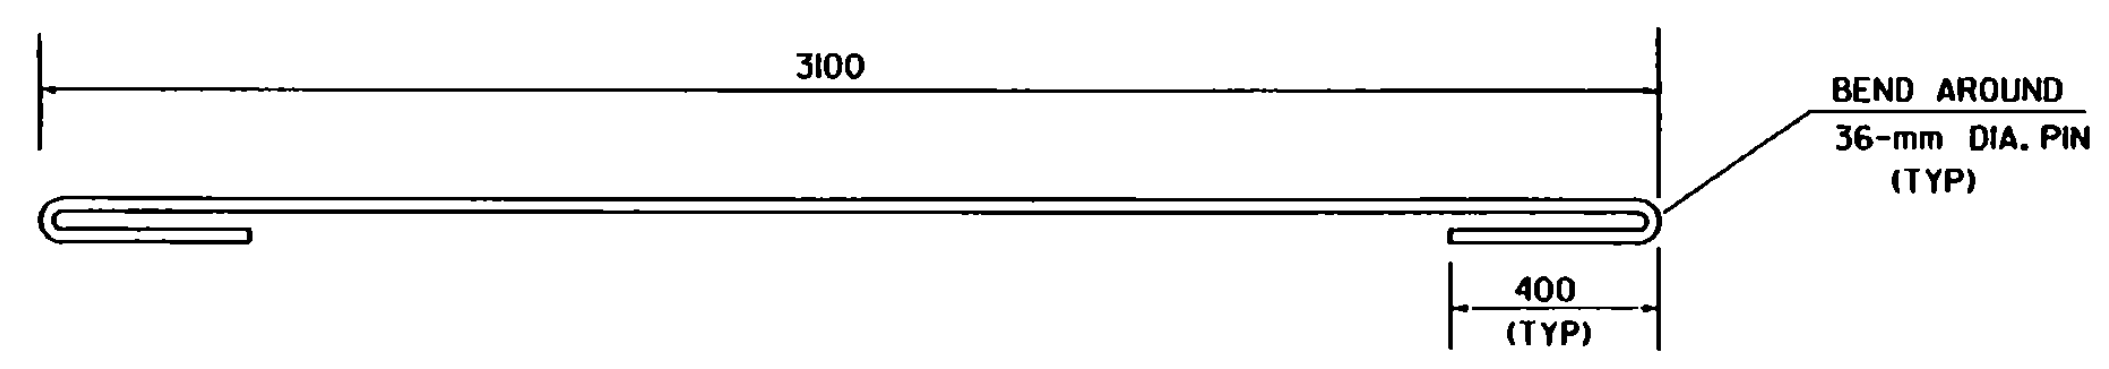


CONNECTION BAR DETAIL
16M REBAR

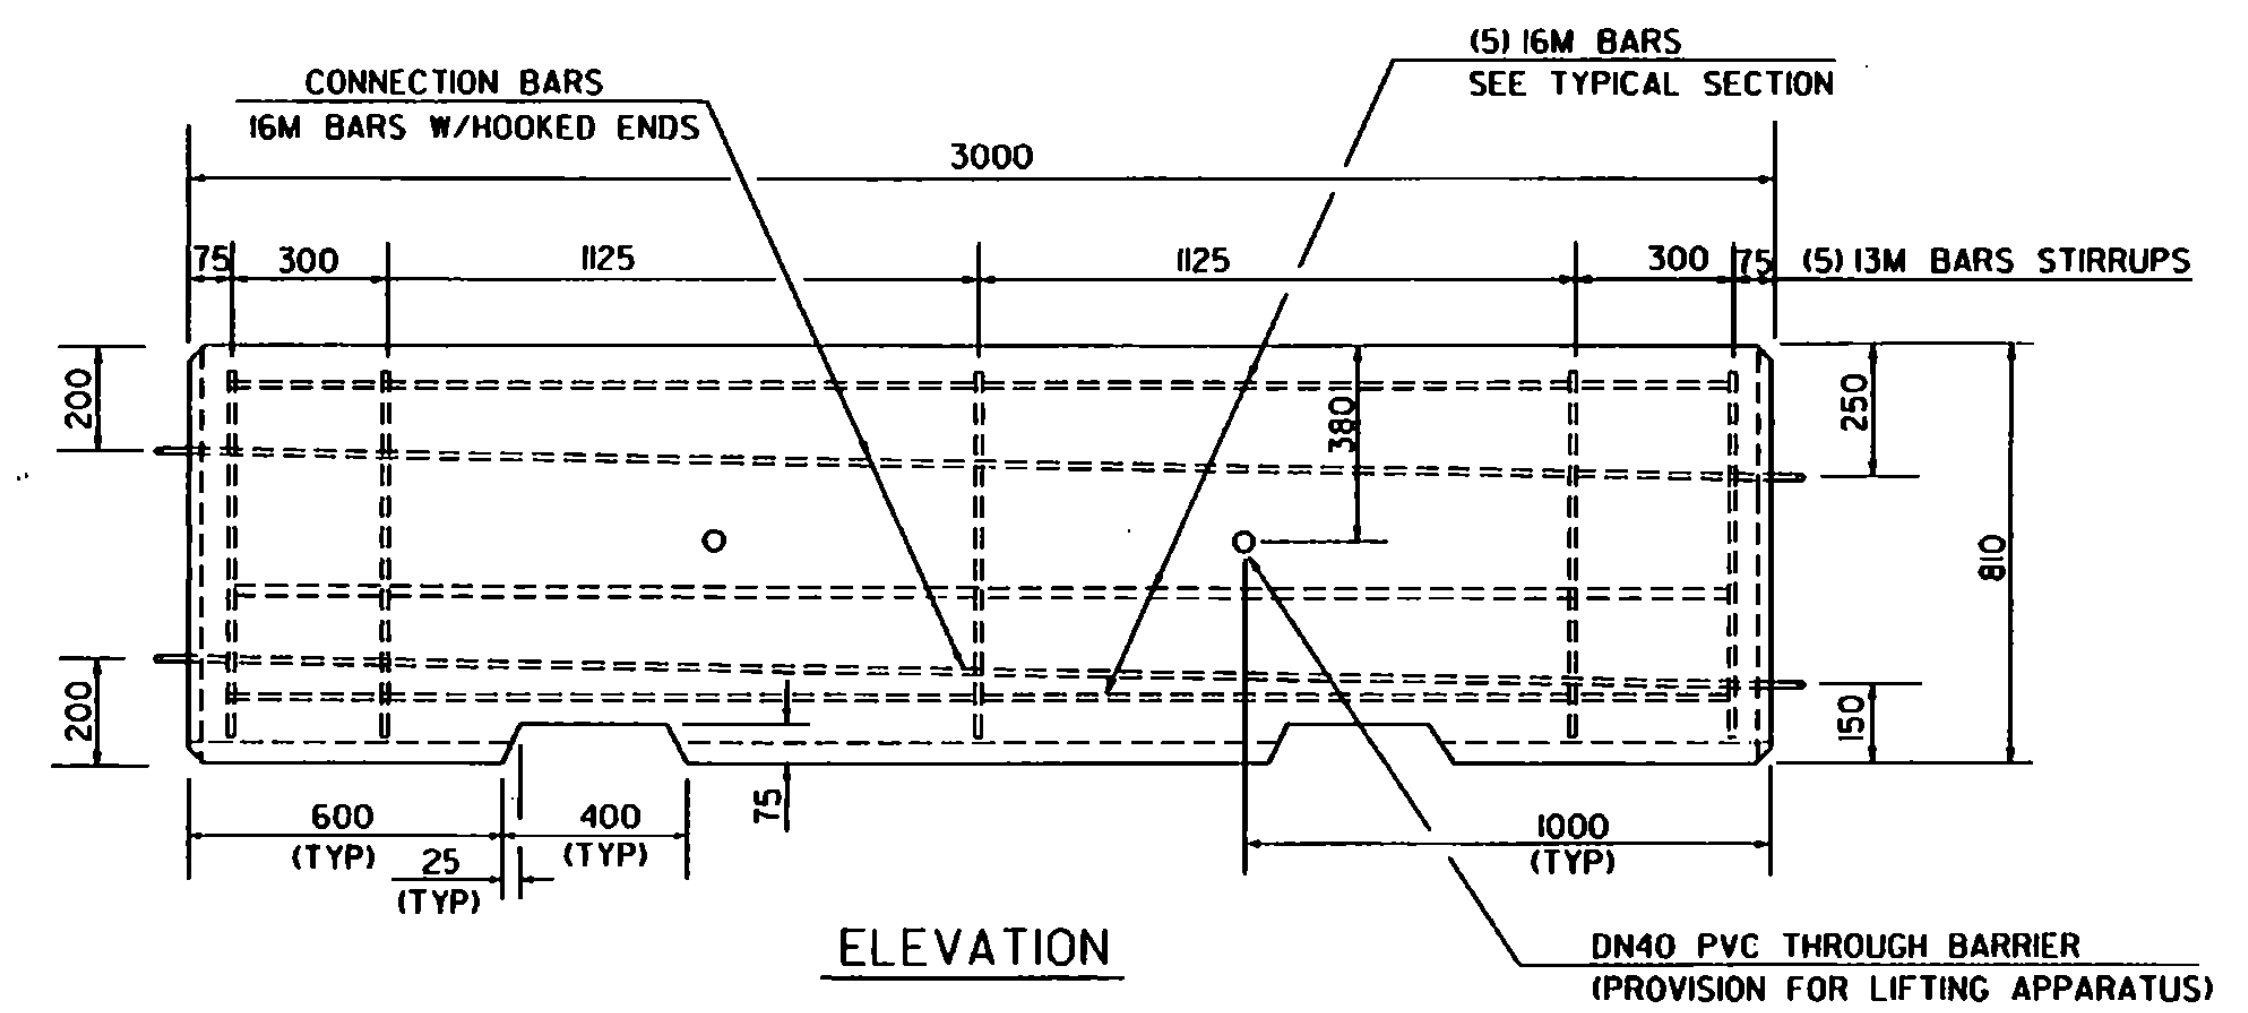


ELEVATION

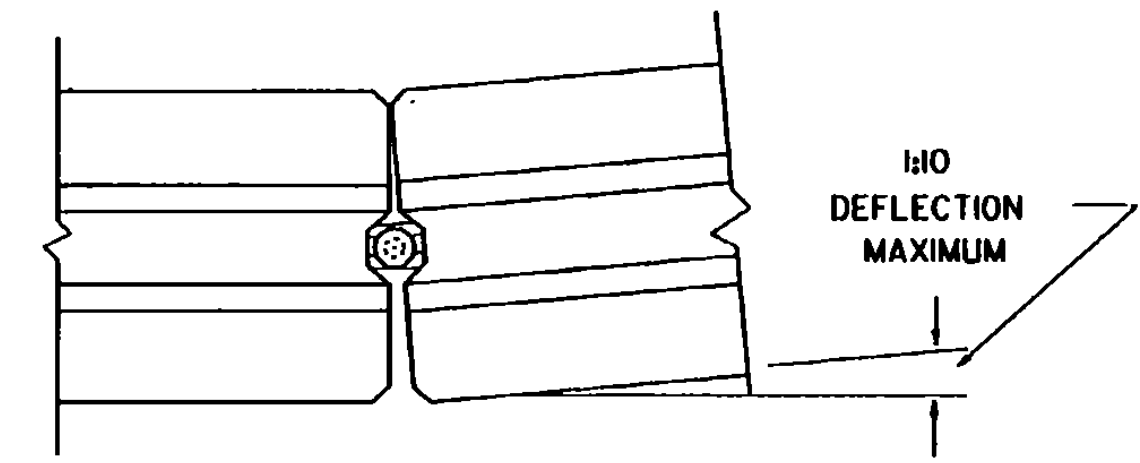

PLAN CONNECTION DETAIL

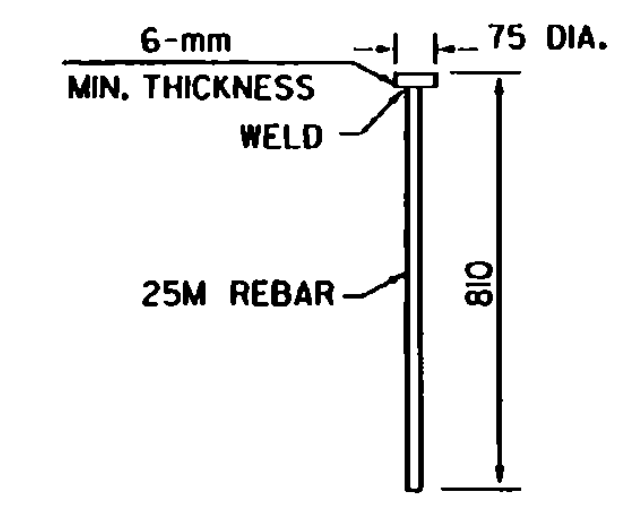


CONNECTION PIN

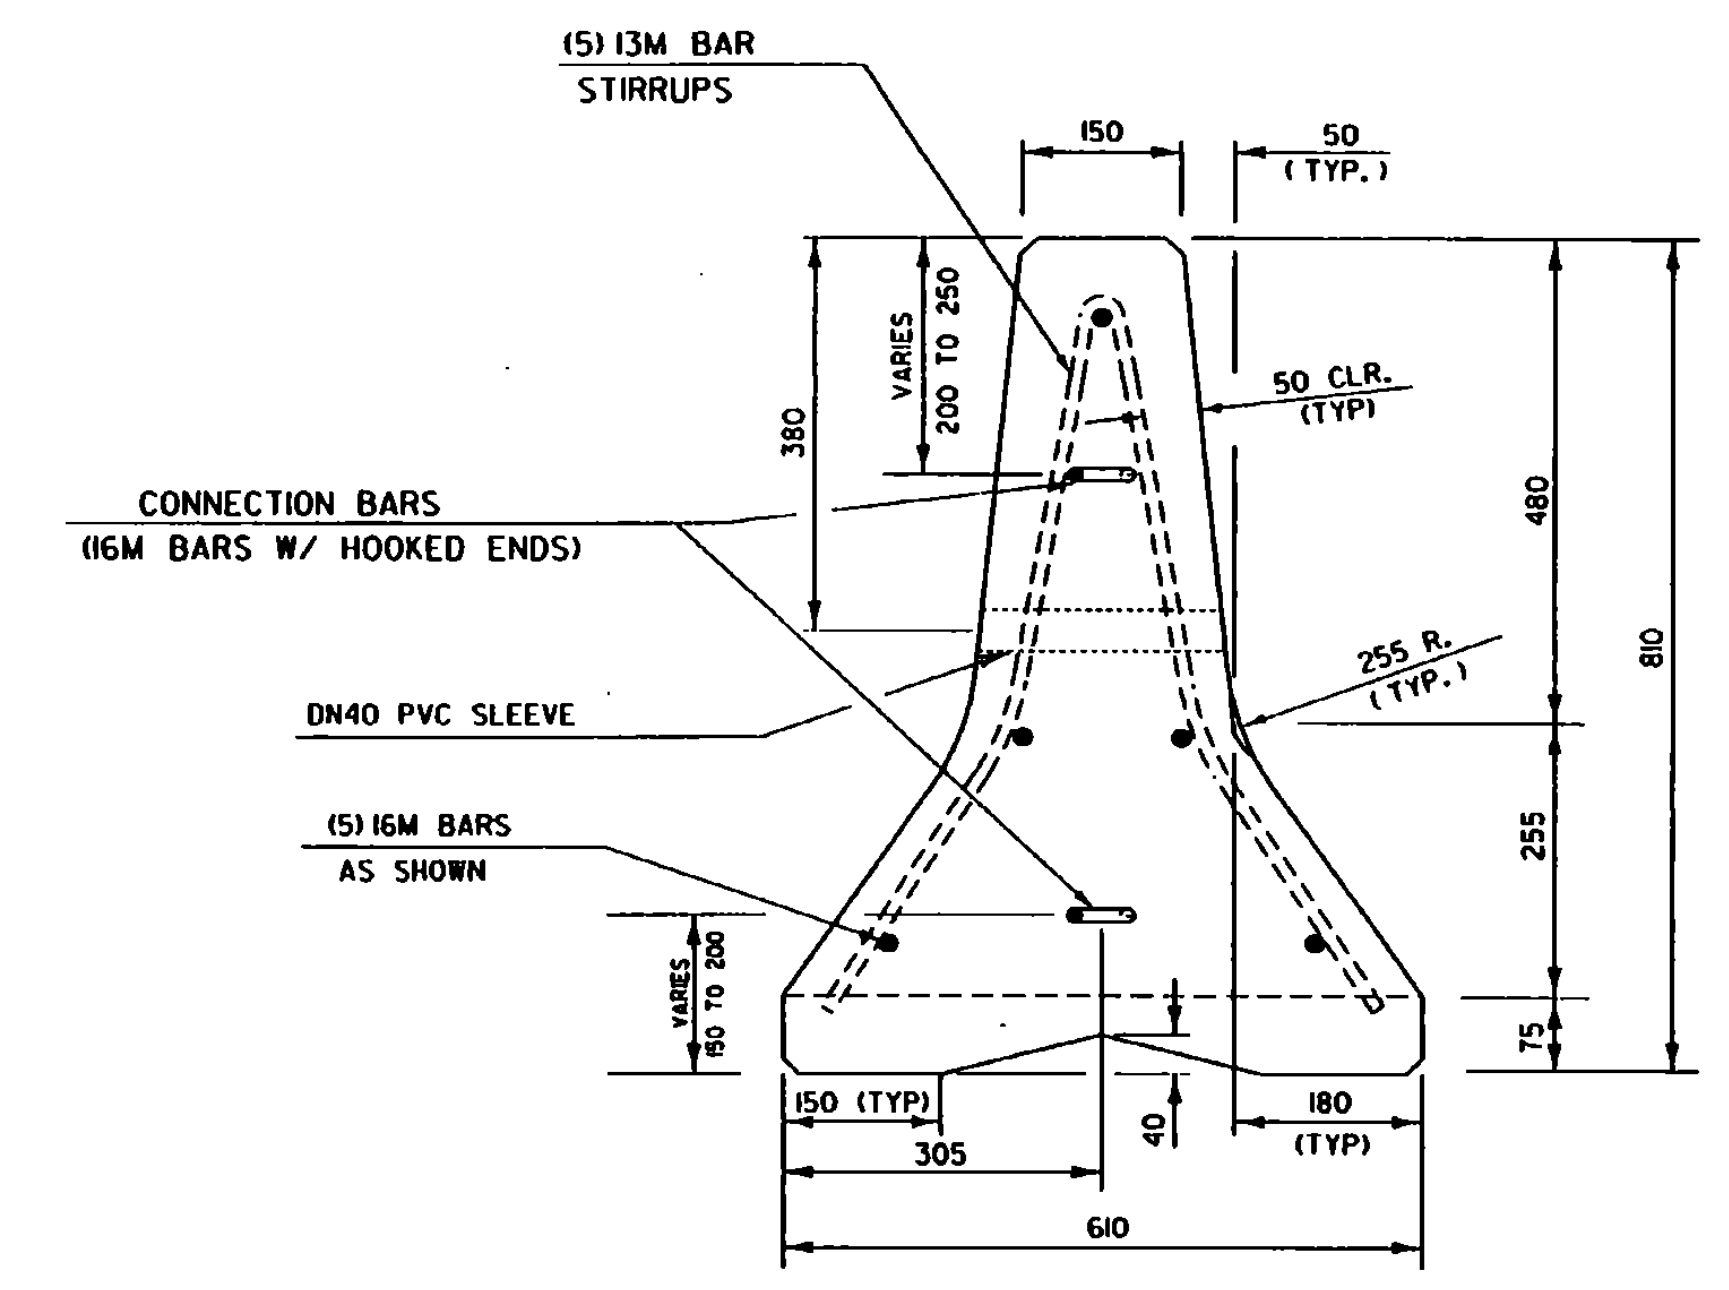

TYPICAL SECTION

NOTES

1. ALL CONCRETE WILL BE CLASS A.
2. ALL REINFORCING STEEL SHALL CONFORM TO AASHTO M-31M, GRADE 420.
3. REFLECTORS SHALL BE INSTALLED ON THE SIDE OF THE TEMPORARY TRAFFIC BARRIER. WHEN PLACED ON THE DRIVERS LEFT SIDE, THE REFLECTORS SHALL BE YELLOW. THE REFLECTORS SHALL BE WHITE WHEN PLACED ON THE DRIVERS RIGHT SIDE. THE REFLECTORS SHALL BE INSTALLED AT A HEIGHT OF 530 mm AT 6-m INTERVALS AND SHALL BE AT LEAST 5800 mm². THE REFLECTORS SHALL MEET THE REQUIREMENTS FOR SECTION 751.02 OR 751.03. THE REFLECTORS SHALL BE INSTALLED ON BOTH SIDES WHEN PLACED IN THE MEDIAN AND IN ALL CASES SHALL BE FIRMLY ATTACHED TO THE SIDE OF BARRIER. THE TYPE OF REFLECTOR AND THE INSTALLATION PROCEDURE SHALL BE SUBMITTED FOR REVIEW PRIOR TO INSTALLATION. COST OF FURNISHING AND INSTALLING REFLECTORS SHALL BE INCLUDED IN THE PRICE BID FOR TEMPORARY TRAFFIC BARRIERS.

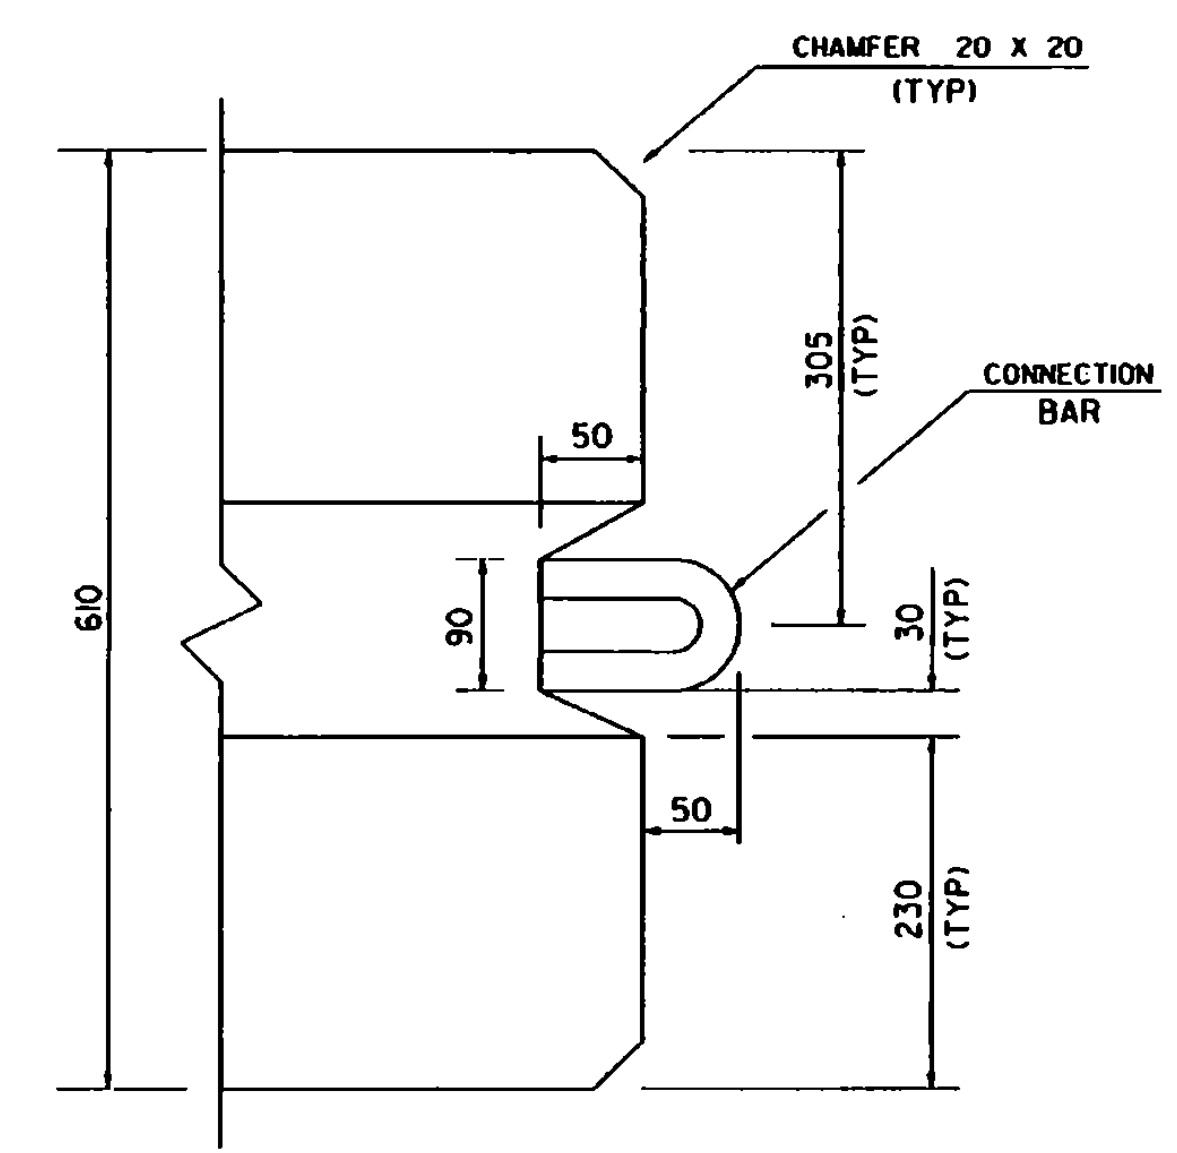

PLAN AT ENDS OF BARRIER

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

REVISIONS AND CORRECTIONS
JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED
[Signature]
DIRECTOR OF ENGINEERING
[Signature]
DESIGN ENGINEER

PRECAST CONCRETE TEMPORARY TRAFFIC BARRIER



Metric
STANDARD
G-18 M