



TYPES OF TEMPORARY DAMS



DAM SHOULD EXTEND FAR ENOUGH UP DITCH SIDE SLOPES TO EFFECTIVELY POND THE RUNOFF AND PREVENT EROSION AND WASHOUT.

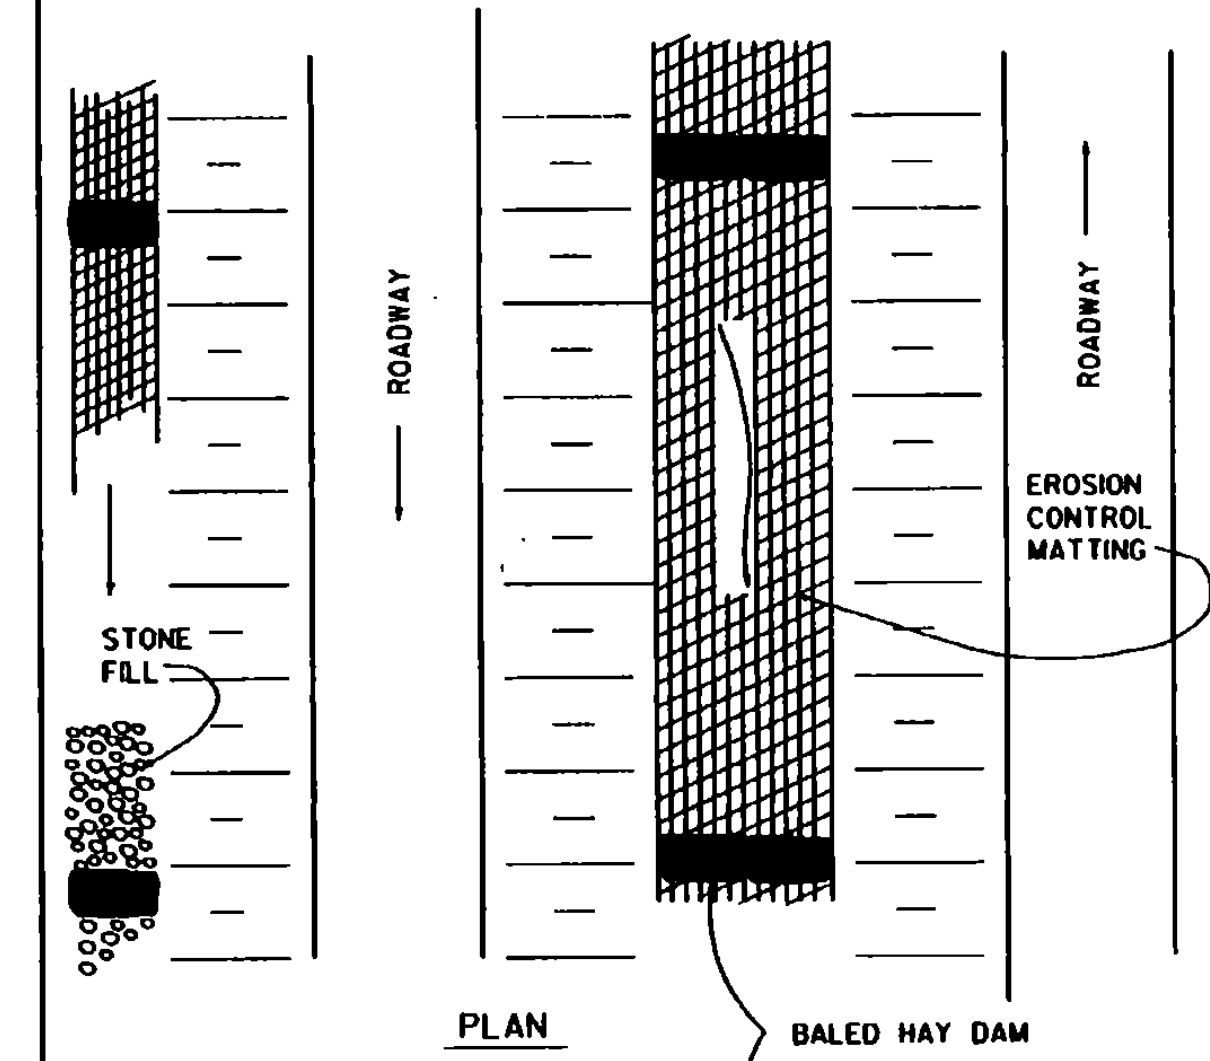

BALED HAY DAMS USED IN DITCHES


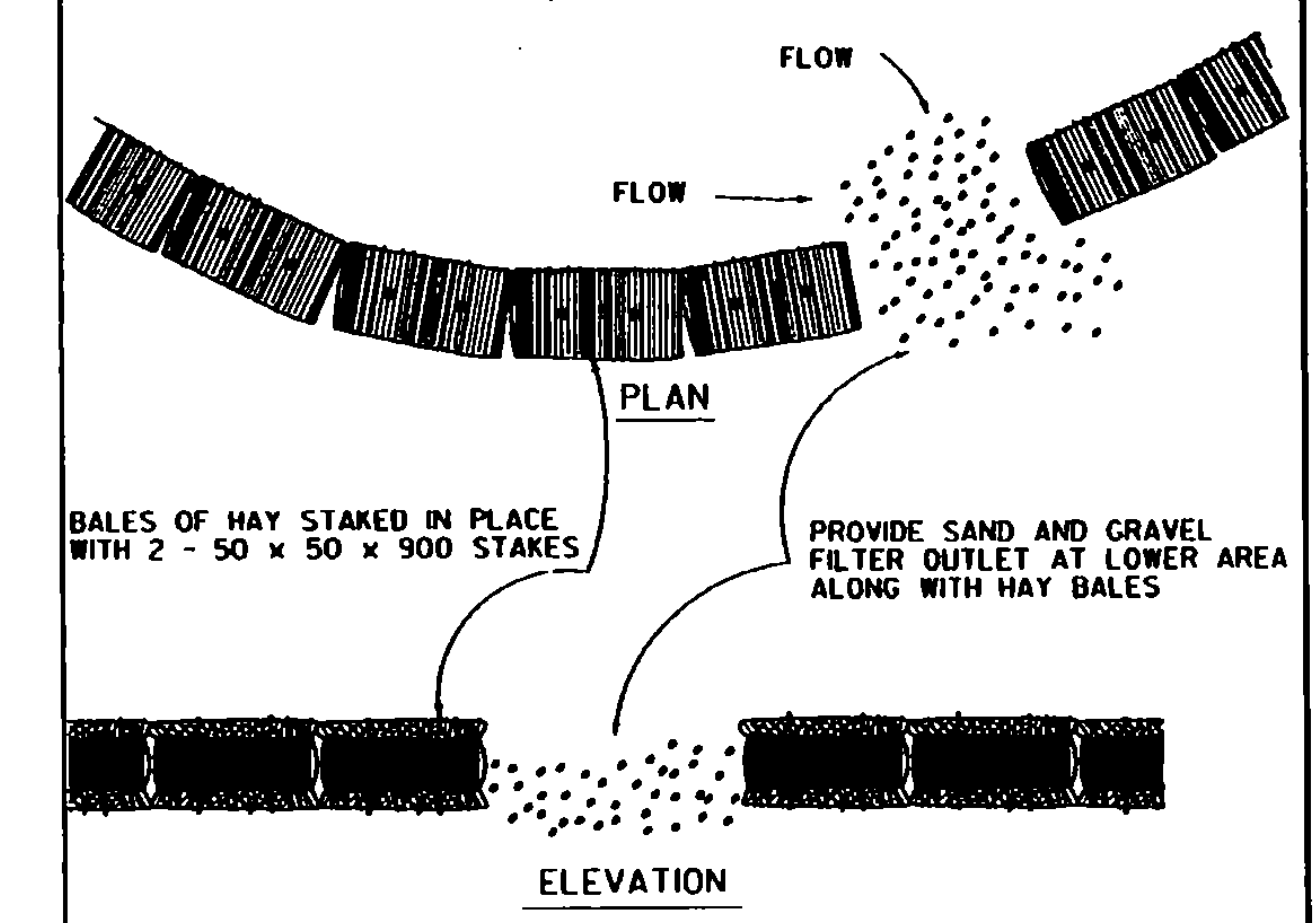


BALED HAY DAMS ALONG TOE OF SLOPE

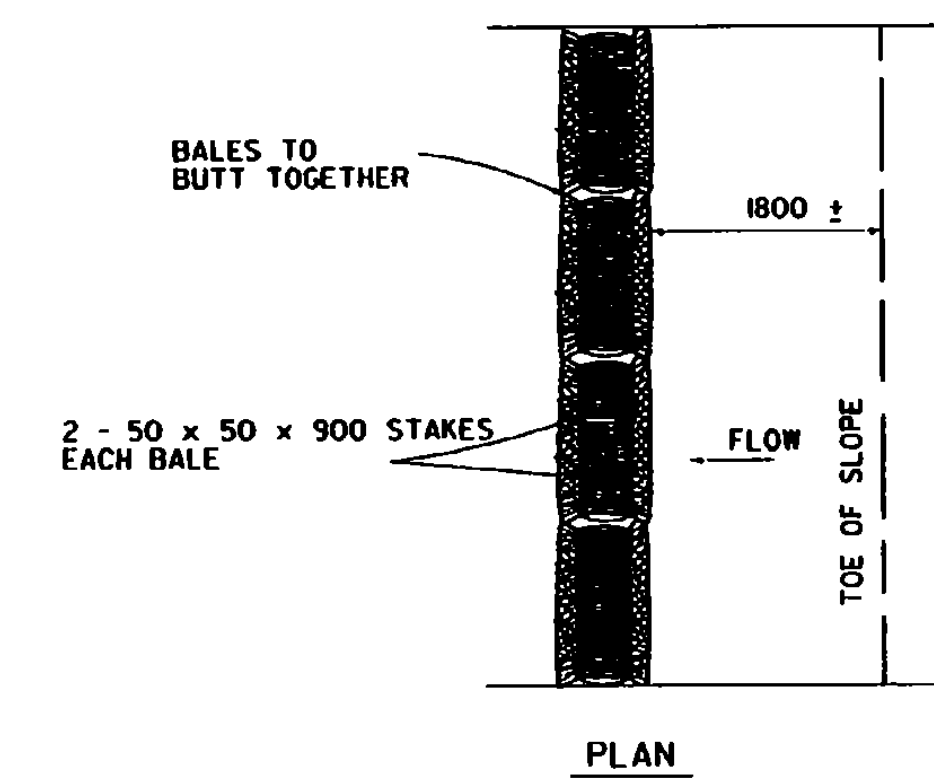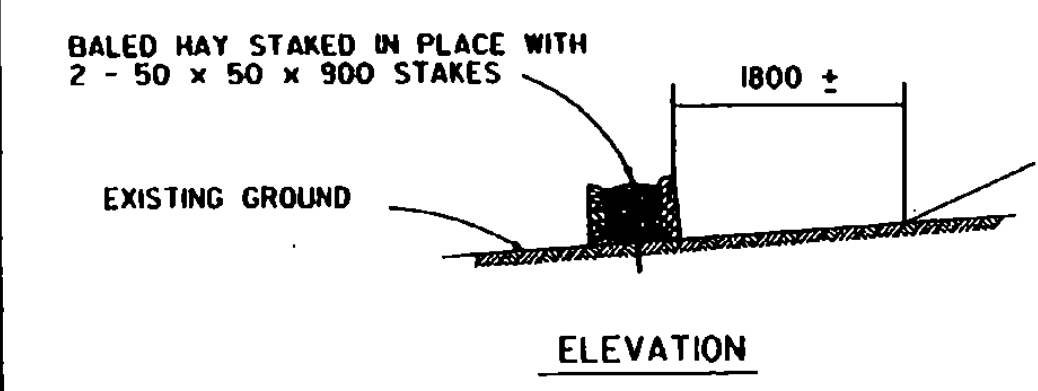


TO BE USED WHERE THE EXISTING GROUND SLOPES AWAY FROM THE HIGHWAY EMBANKMENT.

BALED HAY EROSION CHECKS

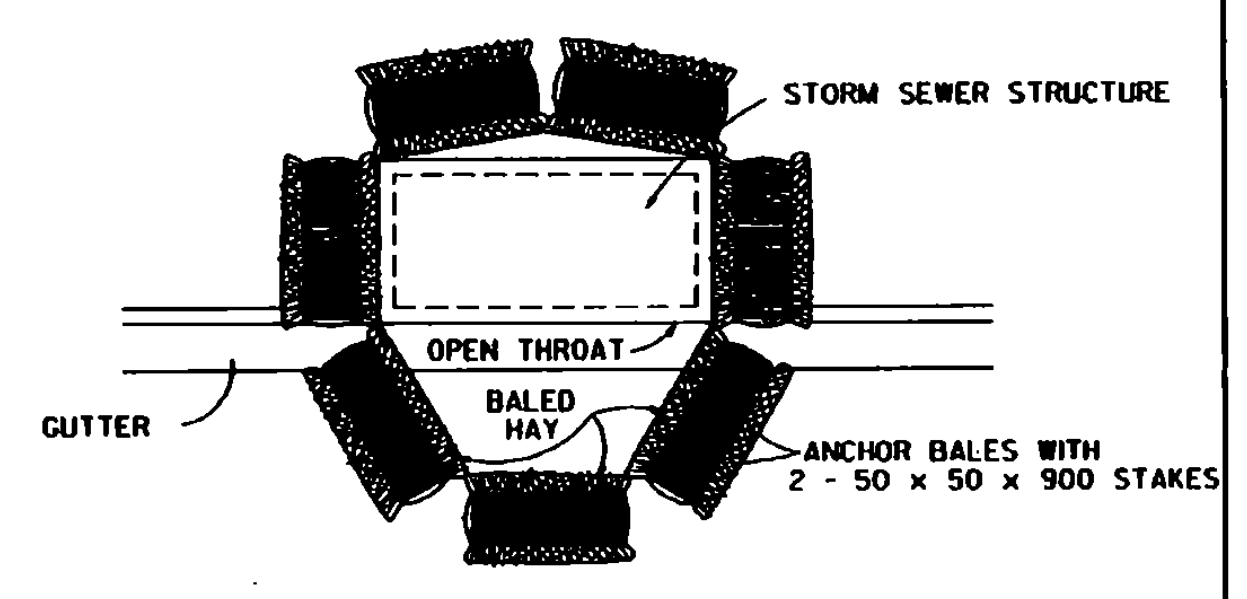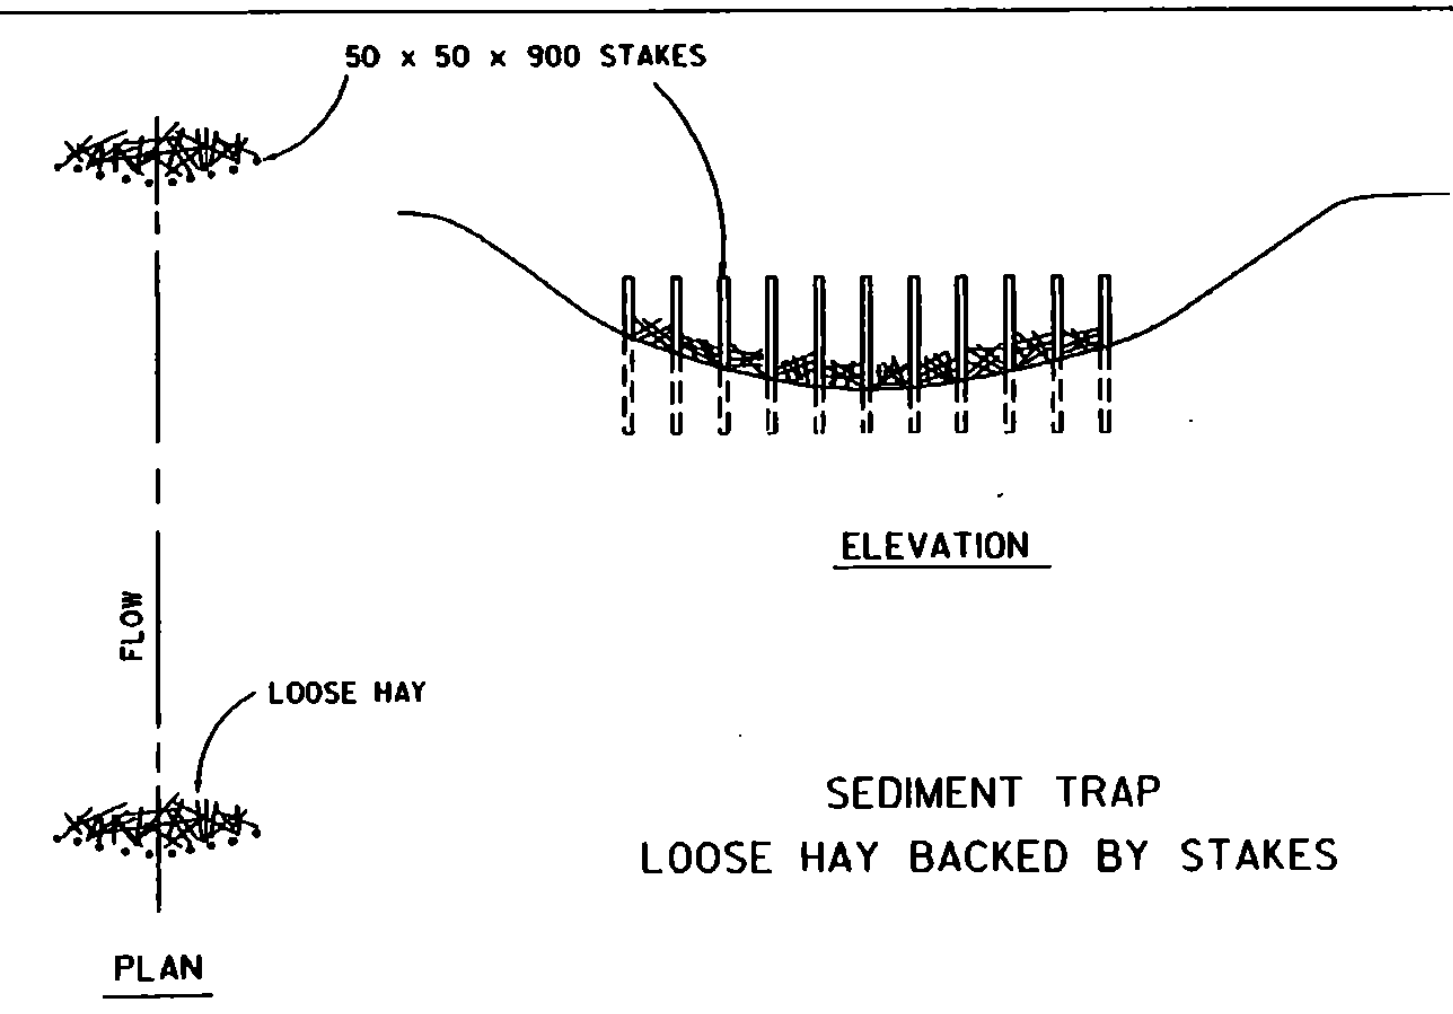

INLET PROTECTION TEMPORARY BARRIER - HAY BALES

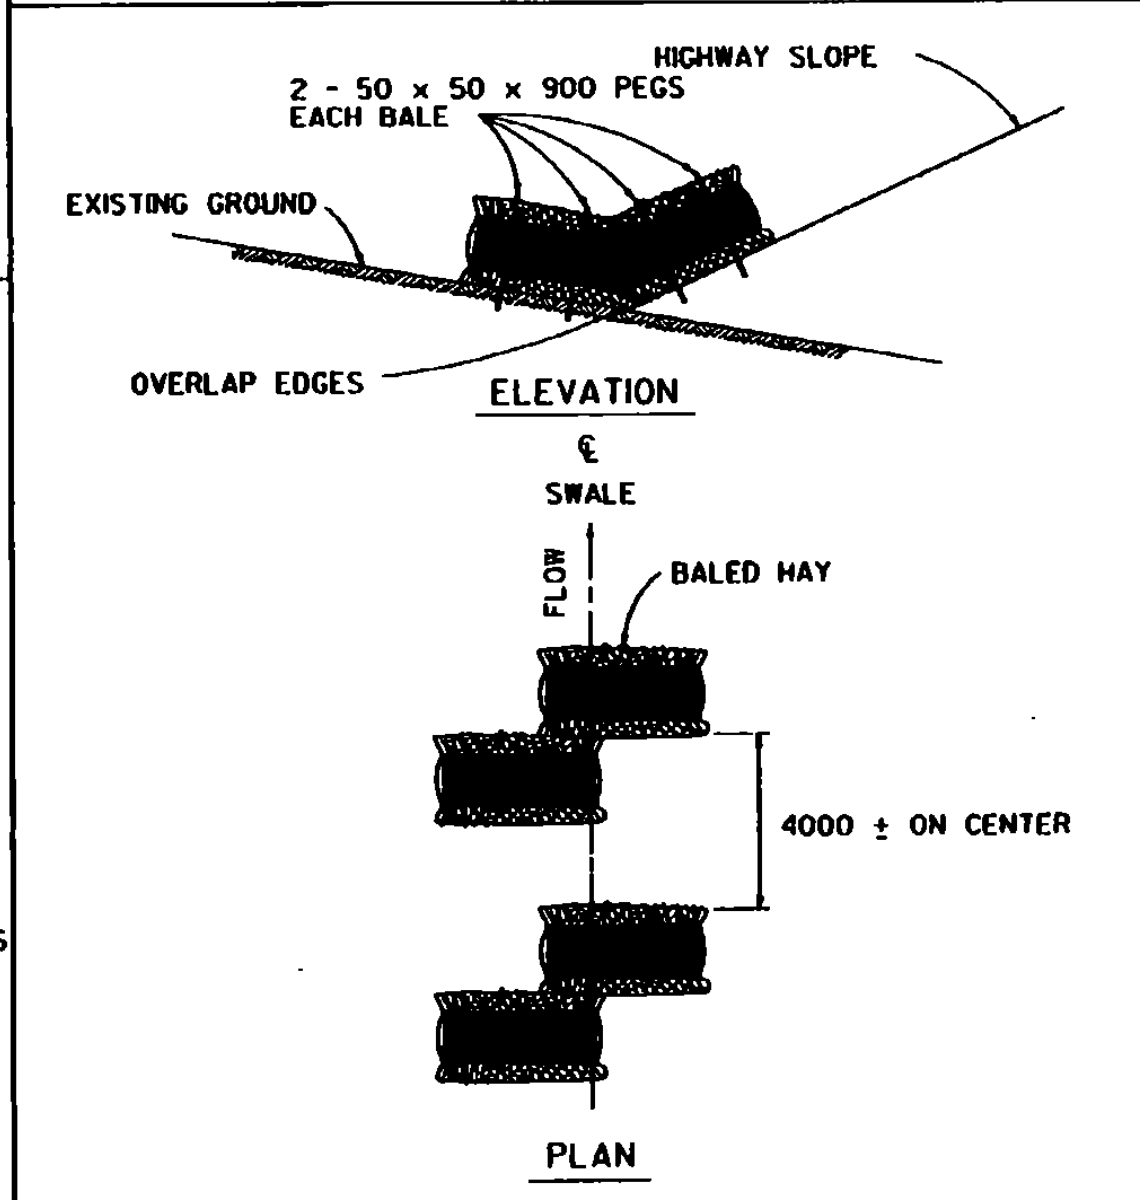

TO BE USED IN LOCATIONS WHERE THE EXISTING GROUND SLOPES IN TOWARD THE EMBANKMENT. BALES WILL BE ALLOWED TO ROT IN PLACE.

BALED HAY EROSION CHECKS

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (mm) EXCEPT WHERE NOTED.

REVISIONS AND CORRECTIONS


JUNE 13, 1997 - ORIGINAL APPROVAL DATE

APPROVED

*[Signature]*  
DIRECTOR OF ENGINEERING

*[Signature]*  
DESIGN ENGINEER

TEMPORARY EROSION CONTROL DETAILS

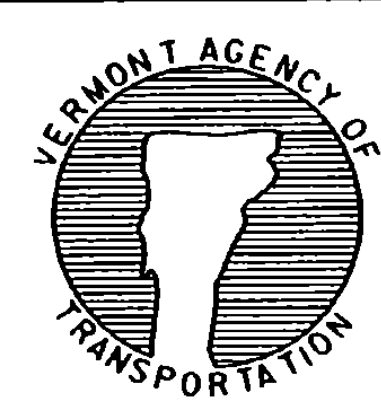

Metric STANDARD T-2M