MATERIAL TOLERANCES	
PAVEMENT (TOTAL DEPTH):	+/- 1/4 in
SUBBASE:	+/- 1 in
SAND:	+/- 1 in

US ROUTE 7
TYPICAL SECTIONS

NOT TO SCALE

2" TYPE III MEDIUM DUTY BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (2 - 1" PAVEMENT LIFTS)
6" TYPE II MEDIUM DUTY BITUMINOUS CONCRETE PAVEMENT (PG 58-28) (2 - 3" PAVEMENT LIFTS)
24" DENSE GRADED CRUSHED STONE FOR SUBBASE
18" SAND BORROW

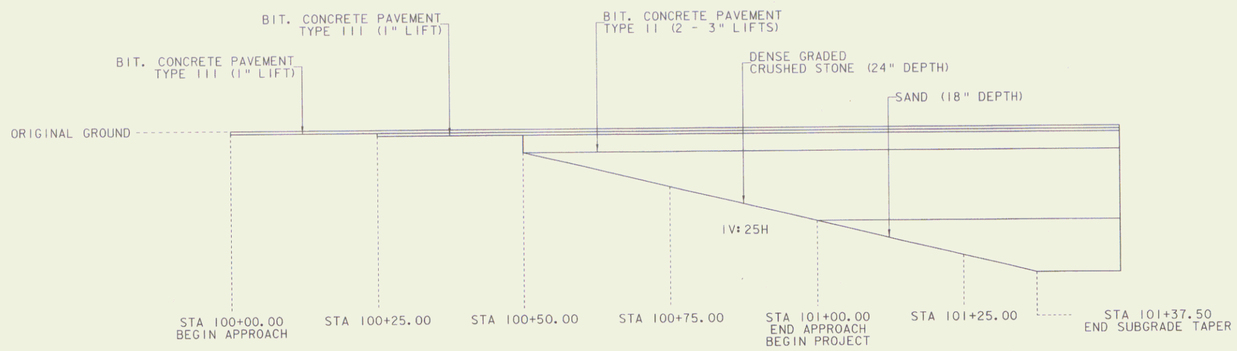

US ROUTE 7
BEGIN PROJECT MATERIAL TRANSITION DETAIL

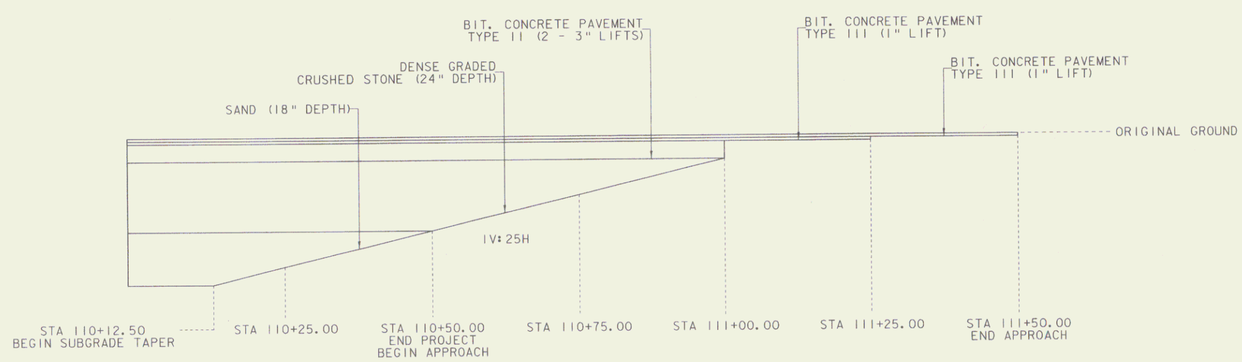

US ROUTE 7
END PROJECT MATERIAL TRANSITION DETAIL

PROJECT NAME: MILTON	
PROJECT NUMBER: STP 5800 (2)	
FILE NAME: 92d289\ROW\r92d289typ2.1	PLOT DATE: 29-JAN-2010
PROJECT LEADER: J. SCHULTZ	DRAWN BY: J. DEVLIN
DESIGNED BY: D. LYMAN	CHECKED BY: J. DEVLIN
	R.O.W. SHEET 3 OF 28