NEW DRAINAGE

(1) 1+062.70 RT ~ 1+091.35 LT
NEW 600 mm X 38 m PCCPSP, CAAP, RCP CL III CPEP(SL)
NEW 1.2 X 1.2 M.H. w/ C.I. COVER & INLET

EXISTING DRAINAGE

(1) U.S. 5 1+062.70 RT ~ 1+104.19 LT
REMOVE EXISTING 460 mm RCP & DI

UNDERDRAIN

(10) U.S. 5 1+063 RT ~ 1+073.3 RT
NEW 150 mm x 13m CARRIER

ASSEMBLY "A" ASSEMBLY "B"



STATION 1+000.00
BEGIN APPROACH CONSTRUCTION
BEGIN ROW PROJECT
NH 2000(18) STA RTE. 5 1+043.1 ℄

STATION 1+070.620
END APPROACH CONSTRUCTION
BEGIN PROJECT NH 2000(18)

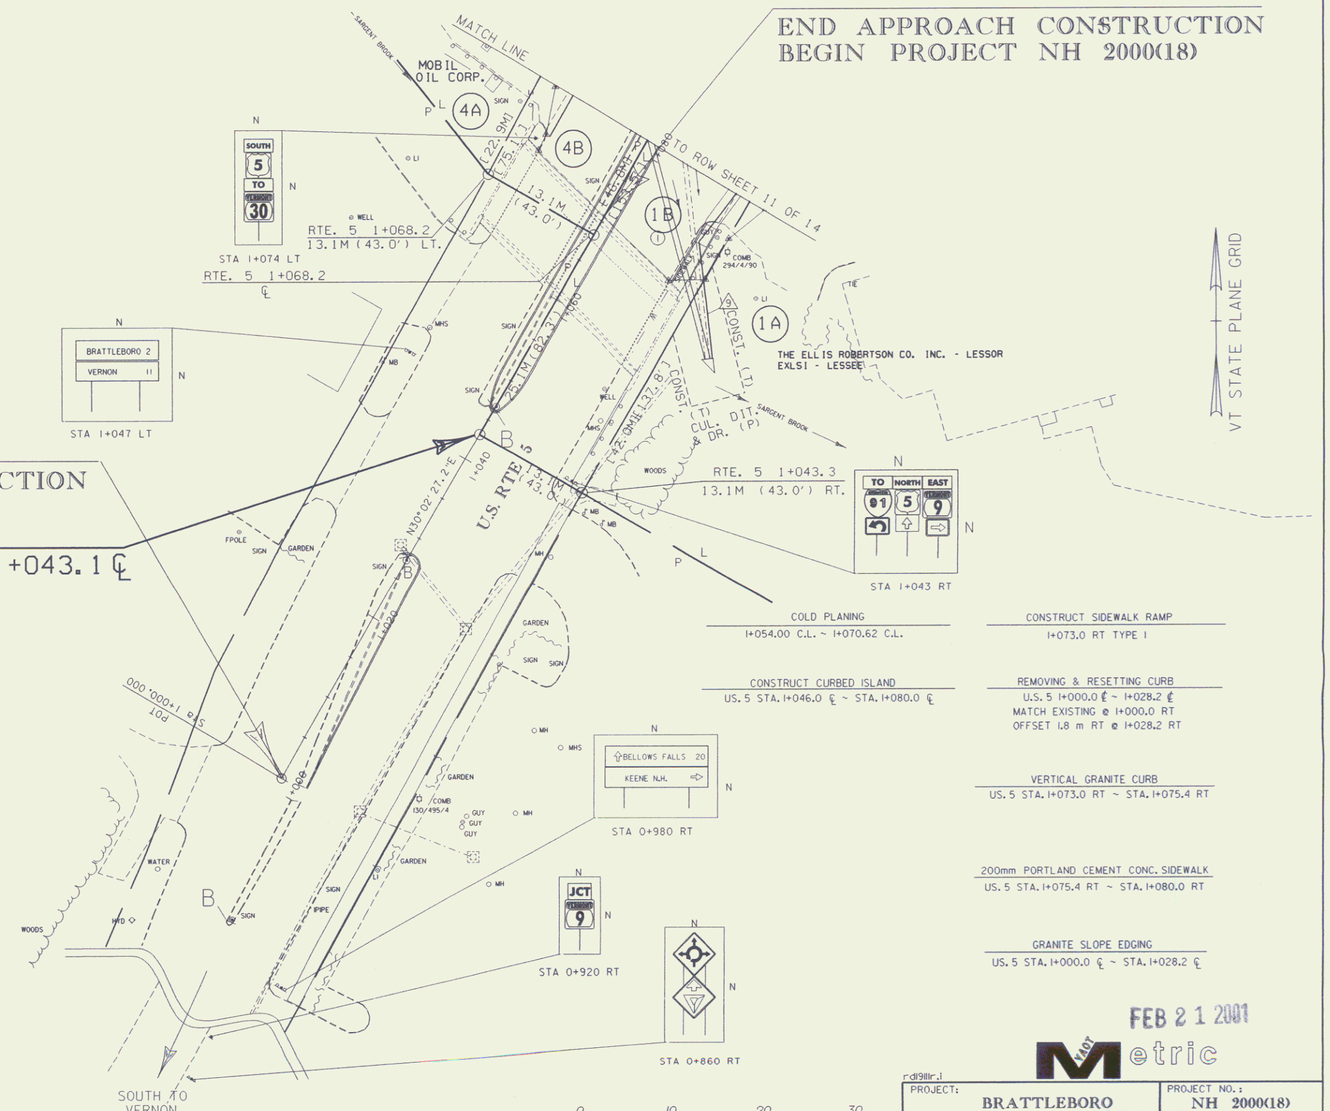

COLD PLANING
1+054.00 C.L. ~ 1+070.62 C.L.

CONSTRUCT CURBED ISLAND
US. 5 STA. 1+046.0 ℄ ~ STA. 1+080.0 ℄

CONSTRUCT SIDEWALK RAMP
1+073.0 RT TYPE I

REMOVING & RESETTING CURB
U.S. 5 1+000.0 ℄ ~ 1+028.2 ℄
MATCH EXISTING ℄ 1+000.0 RT
OFFSET 1.8 m RT ℄ 1+028.2 RT

VERTICAL GRANITE CURB
US. 5 STA. 1+073.0 RT ~ STA. 1+075.4 RT

200mm PORTLAND CEMENT CONC. SIDEWALK
US. 5 STA. 1+075.4 RT ~ STA. 1+080.0 RT

GRANITE SLOPE EDGING
US. 5 STA. 1+000.0 ℄ ~ STA. 1+028.2 ℄

LINES SHOWN ON THIS PLAN AS EXISTING PROPERTY LINES P/L ARE BELIEVED TO BE ACCURATE BUT SHOULD NOT BE RELIED UPON FOR PURPOSES UNRELATED TO THE STATE OF VERMONT'S ACQUISITION OF LAND AND RIGHTS FOR THIS PROJECT.

0 10 20 30
SCALE (1:250) IN METERS

FEB 2 1 2001

Metric

rdl9111r.i

PROJECT: BRATTLEBORO	PROJECT NO.: NH 2000(18)
DESIGN FILE NAME: C:\USERS\PROP\93D191\rdl9lzzz.dgn	
IPARM FILE NAME: dd191r11	PLOT DATE: 13-JUL-1998
SURVEYED BY: R. GILMAN	SURVEY DATE: 10-95
SQUAD LEADER: S. MENARD	DRAWN BY: K. UPMAL

R. O. W. SHEET 10 OF 14

10