


PLANK GUARD RAIL ITEM 62110  
S.B. STA. 876+20 LT.  
N.B. STA. 885+50 RT.

CONTROL OF ACCESS IS COMPLETE  
ON THIS SHEET.

TREATED TIMBER CURB ITEM 61635  
S.B. STA. 871+30 TO STA. 874+00 LT.  
N.B. STA. 883+00 TO STA. 886+00 RT.  
S.B. STA. 872+00 TO STA. 881+00 RT.

JUTE MATTING ITEM 62410  
S.B. STA. 871+30 TO STA. 872+25 LT.  
N.B. STA. 872+00 TO STA. 873+40 LT.  
N.T. STA. 879+50 TO STA. 885+00 LT.

DRILLING AND BLASTING OF SOLID ROCK SUBGRADE, ITEM 20610  
S.B. STA. 880+50 TO 884+80  
RAMP D STA. 13+22 TO 13+51

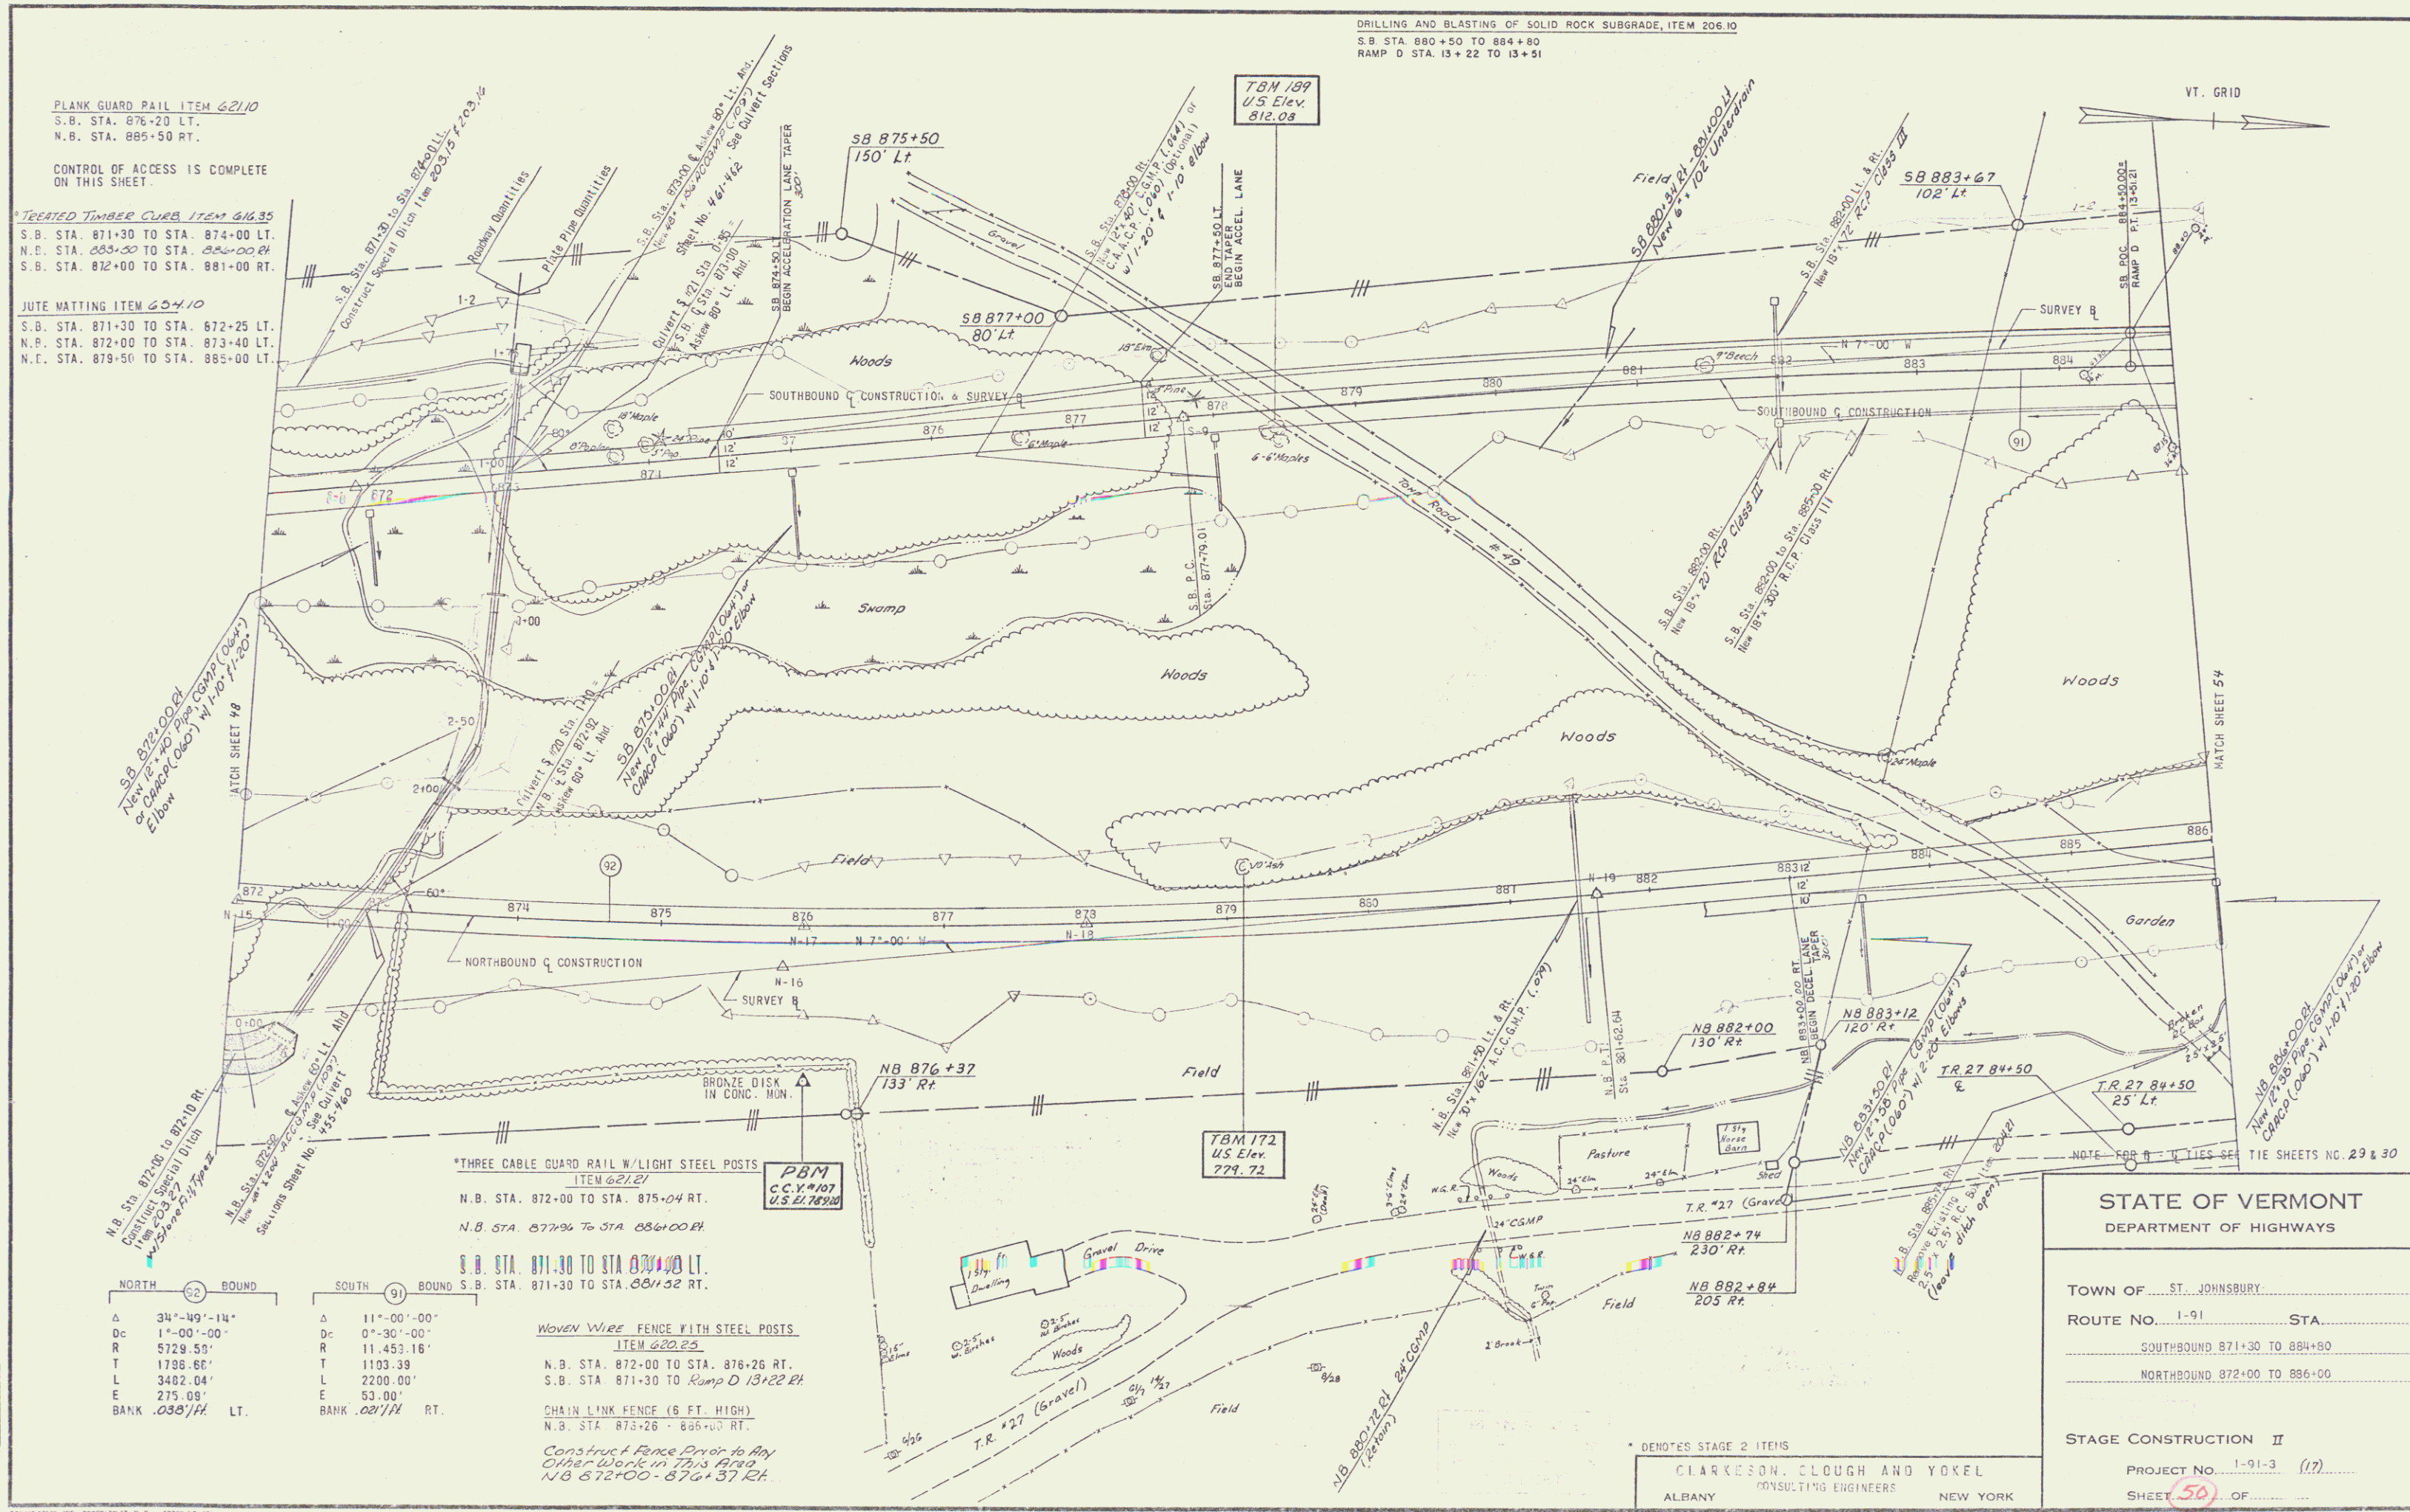

S.B. STA. 872+00 LT.  
N.B. STA. 883+00 RT.  
CONSTRUCT SPECIAL DITCH  
W/ 1:1 SLOPE & 1:12  
ELEVATION

N.B. STA. 872+00 TO 874+00 RT.  
CONSTRUCT SPECIAL DITCH  
W/ 1:1 SLOPE & 1:12  
ELEVATION

\*THREE CABLE GUARD RAIL W/ LIGHT STEEL POSTS  
ITEM 62121  
N.B. STA. 872+00 TO STA. 875+04 RT.  
N.B. STA. 877+06 TO STA. 884+00 RT.

S.B. STA. 871+30 TO STA. 874+00 LT.  
S.B. STA. 871+30 TO STA. 881+02 RT.

WOVEN WIRE FENCE WITH STEEL POSTS  
ITEM 62025  
N.B. STA. 872+00 TO STA. 876+26 RT.  
S.B. STA. 871+30 TO RAMP D 13+22 RT.

CHAIN LINK FENCE (6 FT. HIGH)  
N.B. STA. 875+26 - 886+00 RT.

Construct Fence Prior to Any  
Other Work in This Area  
N.B. 872+00 - 876+37 RT.

NORTH		BOUND	
Δ	34°-49'-14"	Δ	11°-00'-00"
Dc	1'-00'-00"	Dc	0'-30'-00"
R	5729.55'	R	11,453.16'
T	1738.66'	T	1103.39'
L	3402.04'	L	2200.00'
E	275.09'	E	53.00'
BANK .0387H LT.		BANK .0217H RT.	

SURVEYED BY C.C.Y.  
 CHECKED BY J.V.  
 COMPLETED 10/1/72

STATE OF VERMONT  
DEPARTMENT OF HIGHWAYS

TOWN OF ... ST. JOHNSBURY

ROUTE NO. 1-91 STA. ...

SOUTHBOUND 871+30 TO 884+80  
NORTHBOUND 872+00 TO 886+00

STAGE CONSTRUCTION II

PROJECT NO. 1-91-3 (17)  
SHEET (50) OF ...

CLARKSON, CLOUGH AND YOKEL  
ALBANY CONSULTING ENGINEERS NEW YORK