


Rock excavated from Sta 90 to 91.2 to be used as rock fill (no payment) at toe of slope Sta 92+50 to 93+00 Right and 97+00 to 98+00 Right.

Clay from in back of Conc. crib to be used as slope fill from Sta 93+00 to 95+00 Rt and 96+50 to 100+00 Lt. Minimum distance between clay and sub-base to be 4'.
 Payment for excavation for concrete crib will be made only for material excavated inside the neat lines shown on the Cross Sections.

NOTE: STA 94+50 to 97+50
 If ordered by the Engineer during construction the entire slope from Sta 94+50 to 97+50 Lt. will be covered with gravel approximately 2' ft deep. This material to be paid for as sub-base of gravel. ITEM 12B.

Dump pile to be cleared out previous to construction of embankment. All refuse removed is to be wasted and not used in construction of embankment. Removal of refuse to be paid for as common excavation, including borrow.

| Parcel | Kind of Date of Instrument | Grantor | Grantee | Recorded | Remarks |
|--------|----------------------------|------------------|---------------|-----------------|---------|
| A-B-C | W.D. 7-11-35 | MARY C. BLOGGETT | JT. JOHNSBURY | BOOK ANGLE DATE | |
| A-D | W.D. 6-9-36 | J.C. WARREN | JT. JOHNSBURY | BOOK ANGLE DATE | |

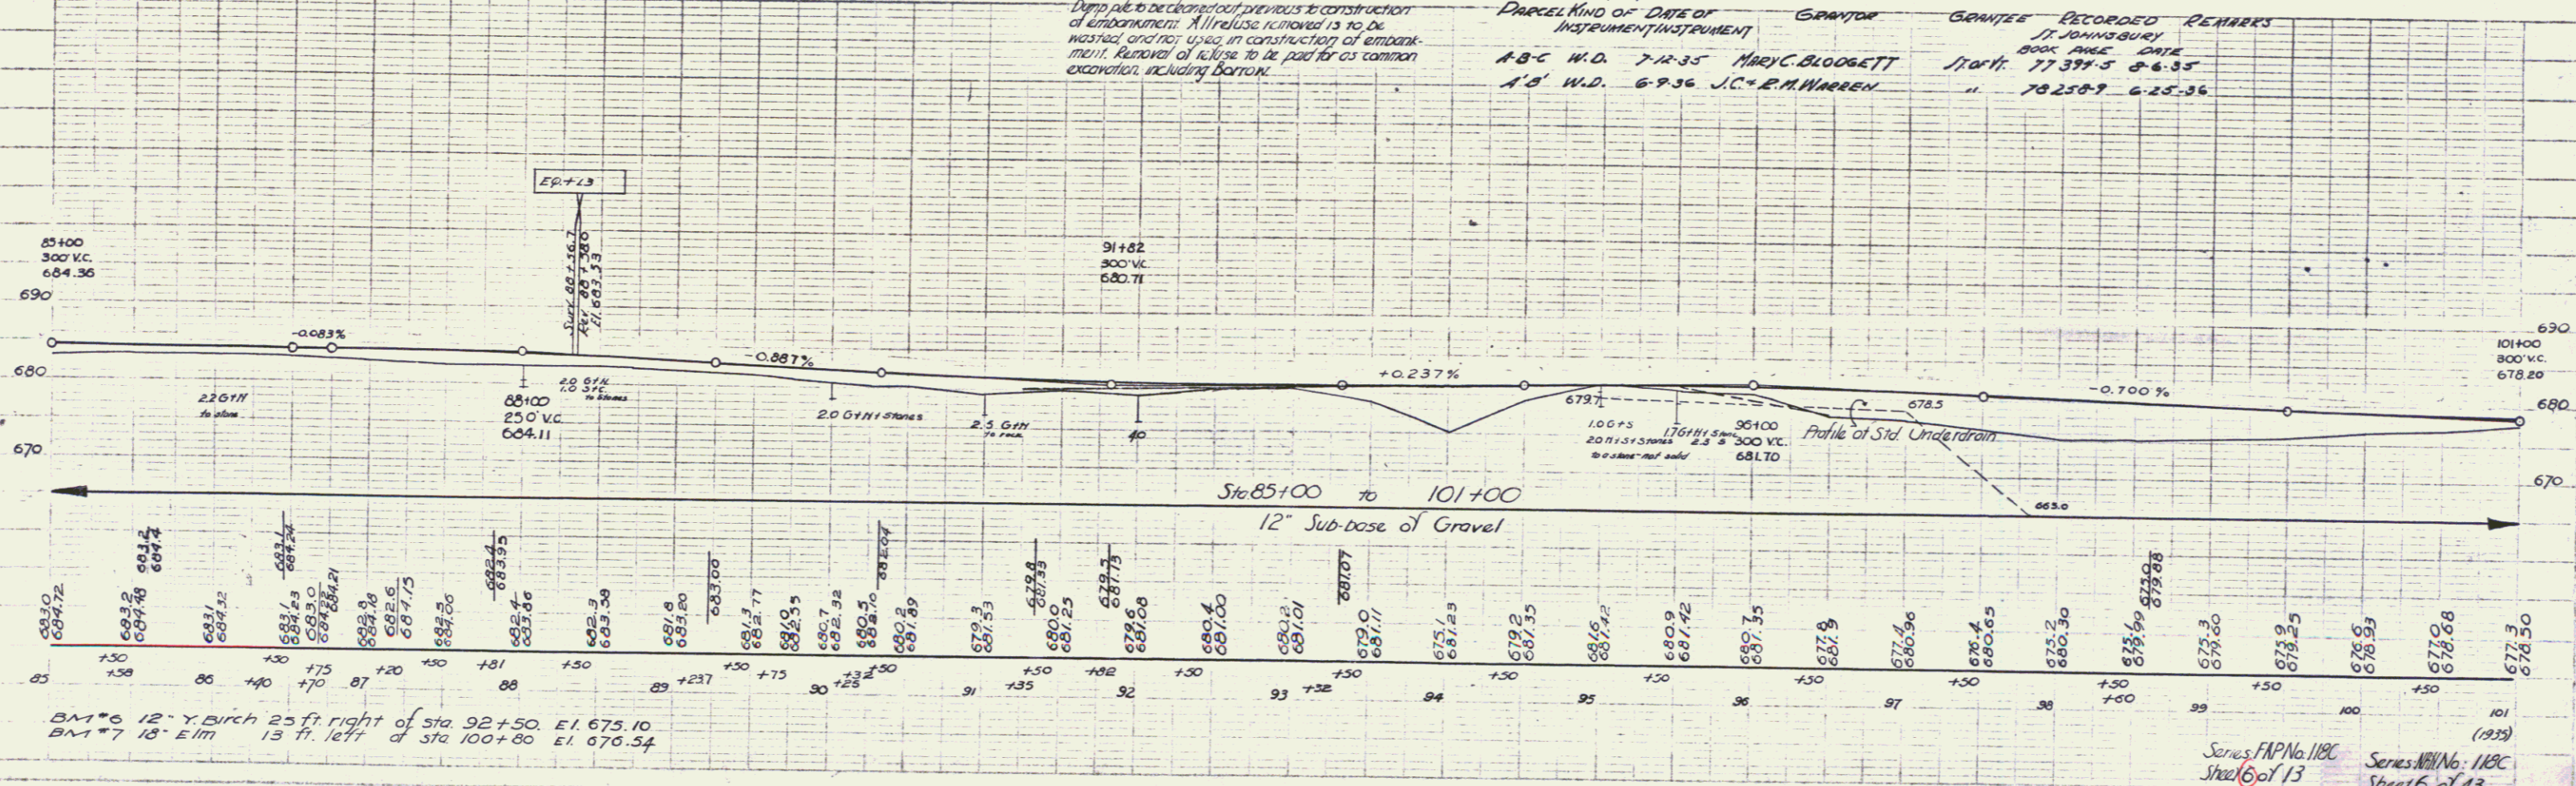

BM #6 12" Y. BIRCH 25 ft. right of Sta. 92+50. E1. 673.10
 BM #7 18" ELM 13 ft. left of Sta. 100+80. E1. 676.54

Series F.P. No. 118C
 Sheet 6 of 13
 Series W.I. No. 118C
 Sheet 6 of 13