


EASTERN BRIDGE, LLC
RR 2, BOX 302
CLAREMONT, NH 03743

PHONE (603) 542-5202 FAX (603) 542-5317

Warpage and Tilt of Flange Correction Procedure

SCOPE: This procedure is to be used to correct unacceptable amounts of warpage, (deviation from flatness) or flange tilt, (deviation of flanges from a line normal to the centerline of the web) in fabricated girders or rolled beams. Correction shall be achieved through the use of line heating on the girder web, or flanges, or both, in combination with the use of moderate mechanical loading if needed.

1. The area to be heated shall be determined by the correction required, see sketch below. Warpage shall be corrected through the use of line heats on the flanges. Flange tilt shall be corrected through the use of line heats on the appropriate surface of the web.

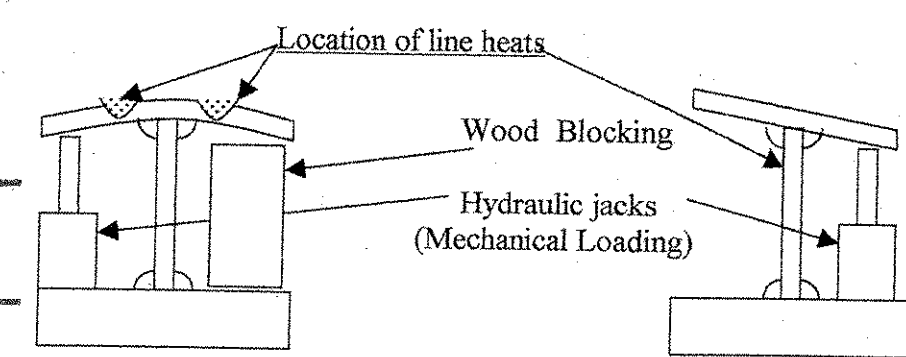

2. Heating shall be performed using appropriate sized rosebud style heating torches. Heating shall be confined to areas described in step 3 and shall be performed so as to bring the steel in those areas to a temperature between 1,000 F and 1,100 F as rapidly as possible without overheating the steel.
3. Heating patterns shall be marked on the steel prior to heating. Line heats shall be marked so as to avoid the areas of high restraint directly opposite fillet welds. The line heat length shall be determined by the amount of flange tilt or flange warpage requiring correction.
4. Heating shall begin at one end of the line and not proceed to the other end until the initial area is brought up to a temperature between 1,000 F and 1,100 F. The torch operator shall have 1,000 F, 1,100 F, & 1,150 F temperature indicating crayons. The steel surface temperature shall be monitored frequently during the heating process, and the temperature shall be controlled so as to achieve 1,100 F and not to exceed 1,150 F.
5. Apply mechanical loading until the bottom flange moves, but no more than $\frac{1}{4}$ ". The force applied shall be a minimum to maintain and support position during the heating process. Mechanical loading shall be achieved using hydraulic jacks in the locations shown for the two types of correction being performed.
6. The QA representative for the state shall be notified prior to implementation of this procedure.

101 SS

VTRANS
RECEIVED

OK'D BY _____ OK'D BY JAC

MAY 18 2006

RESUBMIT APPROVED

BY DATE 6-2-06