

DEMOLITION AND DISPOSAL OF BUILDING ITEM 586
 STA. 59+75 1 1/2 STY. WD. FR. STORAGE BLDG. 60' LT.
 STA. 60+00 2-1000 GAL. GAS TANKS 35' LT.
 STA. 56+25 GAS TANK LT.

CONSTRUCT DRIVES
 STA. 55-50 RT. 13+00 RT.
 STA. 55-60 RT.
 STA. 56-00 RT.
 STA. 57-15 RT.
 STA. 59-85 TO 61-10 RT.
 STA. 61-75 LT.

CONSTRUCT INTERSECTION
 STA. 58-10 TO 59-70 RT.

BITUMINOUS CONCRETE CURB ITEM 555
 STA. 54-00 TO 55-50 LT.

STONE FILL FOR SLOPE PROTECTION (LIGHT TYPE)

| STA. | ITEM 512 |
|-----------|--------------|
| 51-00 | TO 51-33 RT. |
| 51-00 | TO 51-50 LT. |
| 51-40 RT. | TO 52-00 LT. |
| 52-65 RT. | TO 53-12 LT. |
| 52-99 | TO 53-50 RT. |
| 53-38 | TO 53-75 LT. |
| 53+38 | 53+38 |
| 53+38 | 53+38 |

BRIDGE QUANTITIES

REMOVAL AND DISPOSAL OF PRESENT GUARD RAIL ITEM 549
 RTE. 5 RELOC. STA. 51+20 RT. TO 51+87 RT.
 RTE. 5 RELOC. STA. 51+20 RT. TO 51+30 RT.
 RTE. 5 RELOC. STA. 53+16 TO 53+26 RT.
 RTE. 5 RELOC. STA. 53+28 TO 55+80 LT.

VERTICAL GRANITE CURB ITEM 556-B
 STA. 49-50 TO 51-18 RT.
 STA. 49-50 TO 51-34 LT.
 STA. 53+20 TO 53+85 RT.
 STA. 53+38 TO 54+00 LT.


BRIDGE RAILING (FOR BRIDGE APPROACHES)
 ITEM 512
 RTE. 5 RELOC. STA. 50-21 TO 51-34 LT.
 RTE. 5 RELOC. STA. 48-93 TO 51-19 RT.
 RTE. 5 RELOC. STA. 53-20 TO 53+90 RT.
 RTE. 5 RELOC. STA. 53-38 TO 55-63 LT.

RTE. 5 RELOC.

| | |
|------|---------------|
| A | 19'-12"-08.8" |
| Dc | 4'-00"-00" |
| R | 1432.40' |
| L | 242.30' |
| T | 480.05' |
| BANK | 1/2'-FT. LT. |

ONE COURSE CONCRETE SIDEWALK ITEM 560(5)
 STA. 49-50 TO STA. 51-18 RT.
 STA. 53+20 TO STA. 53+85 RT.

CONSTRUCT GUTTER ITEM 554
 STA. 55-50 LT.
 STA. 51+26 LT.
 STA. 51+12 RT.
 STA. 53+38 RT.

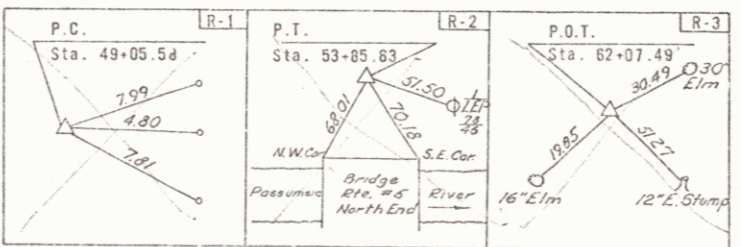

STATE OF VERMONT
 DEPARTMENT OF HIGHWAYS

TOWN OF LYNDON

ROUTE No. U.S. 5 STA. _____

RTE. 5 RELOC. STA. 49-50 TO 62-00

CONTRACT # _____

STAGE CONSTRUCTION I

PROJECT No. LYNDON F041-5(8)

SHEET 13 OF 25

CLARKESON, CLOUGH AND YOKEL—CONSULTING ENGINEERS
 ALBANY NEW YORK

APPROVED FOR CONSTRUCTION BY
 DRAWN BY
 CHECKED BY
 DATE
 COMPLETE