Fed. Road Dist. No.	State	Fed. Aid Proj. No.	Fiscal Year	Sheet No.	Total Sheets
9	Vt.	55D	1926	5A	22

Cable-Guard Rail Required

Left:
Sta. 24+88 to Sta. 28+75 Length 387 ft.

Right:
Sta. 24+88 to Sta. 28+75 Length 387 -
Total for sheet ~ 774 ft.

New Culverts Required

Sta. 23+00 ~ 16" Corr. Gal. Metal Pipe 36' long
Concrete Class B (1-2½-5) 2.3 cu. yds
Reinf. Steel 33 lbs.

Curve 5A
Δ 7°55'
D 4°
T 99.1
L 197.9
E 3.4
R 1432.5

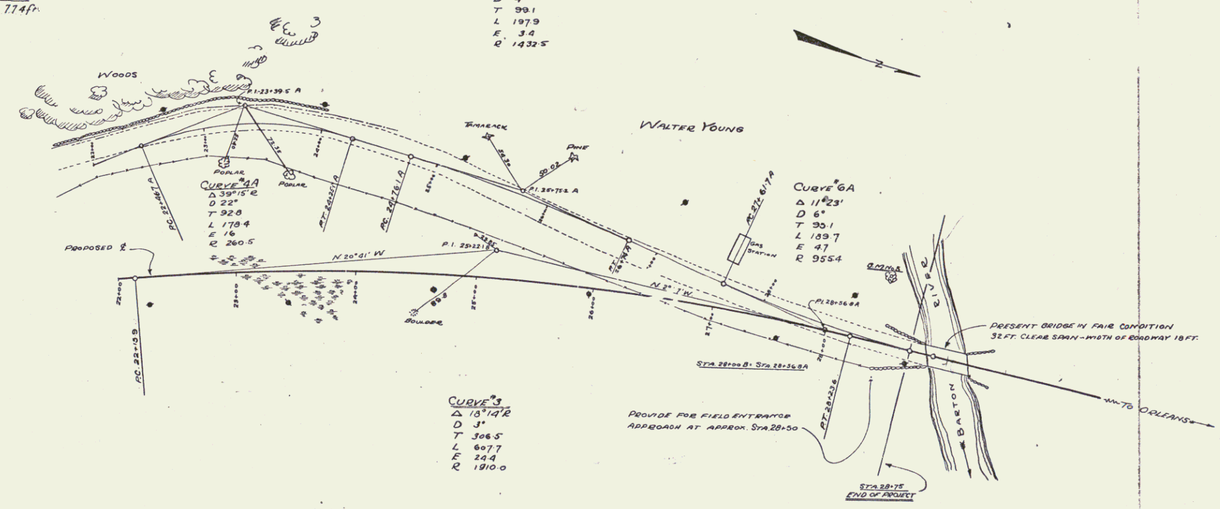

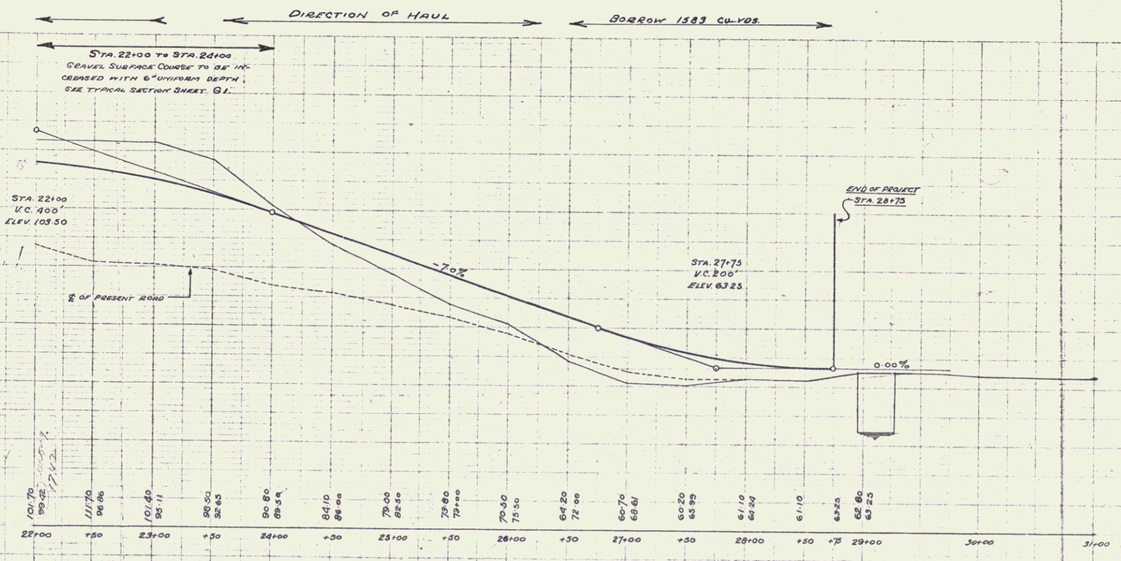

B.M. No. 5 - Spike in base of 8" elm 50' L. Sta. 29+00 - Elev. 58.16 ft.

Series F No. 55D Filed

Sheet 5A of 22