


**TYPICAL SECTION THROUGH CONCRETE CURB CONSTRUCTION JOINT**

**SHEET MEMBRANE NOTES:**


1. SUBSECTION 519.04 SURFACE PREPARATION:  
PREPARE THE SURFACE OF THE FACE OF THE SIDEWALK TO BE SEALED WITH POLYURETHANE LIQUID MEMBRANE IN THE SAME MANNER AS THE DECK.
2. POLYURETHANE LIQUID MEMBRANE:  
PAYMENT FOR ITEM 519.20 "SHEET MEMBRANE WATERPROOFING, TORCH APPLIED" INCLUDES POLYURETHANE MEMBRANE SEALANT.
3. SHEET MEMBRANE WATERPROOFING, TORCH APPLIED:  
EXTEND SHEET MEMBRANE WATERPROOFING TO FACE OF SIDEWALK.

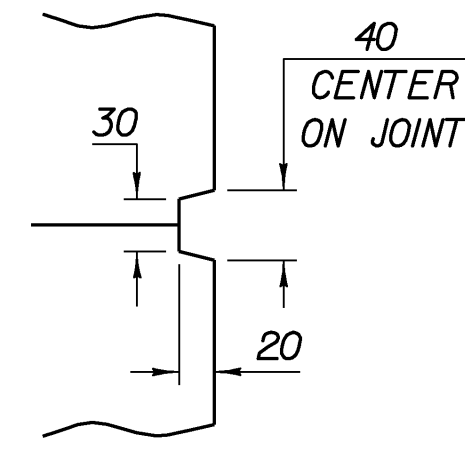


**SCORE MARK DETAIL**

**SIDEWALK NOTES:**

1. CONCRETE SIDEWALK MAY BE POURED IN ONE CONTINUOUS POUR IF ONE OF THE APPROVED SHRINKAGE REDUCING ADMIXTURES LISTED IN THE SPECIAL PROVISIONS IS USED. PAYMENT FOR ADMIXTURE WILL BE INCLUDED IN THE UNIT PRICE BID FOR PAY ITEM 900.608 SPECIAL PROVISION (HIGH PERFORMANCE CONCRETE, CLASS A LOW CEMENT).
2. IF CONTRACTOR CHOOSES TO USE CONSTRUCTION JOINTS IN SIDEWALK, THE JOINTS SHALL BE SPACED AT A MAXIMUM OF 4500 CENTER TO CENTER AND 550 MINIMUM FROM THE CENTER OF THE NEAREST BRIDGE RAIL POST. PLACE CONCRETE SIDEWALKS IN ALTERNATE SECTIONS WITH A MINIMUM OF 48 HOURS DELAY BETWEEN ADJACENT POURS.
3. PASS LONGITUDINAL REINFORCING THROUGH CONCRETE CONSTRUCTION JOINTS.

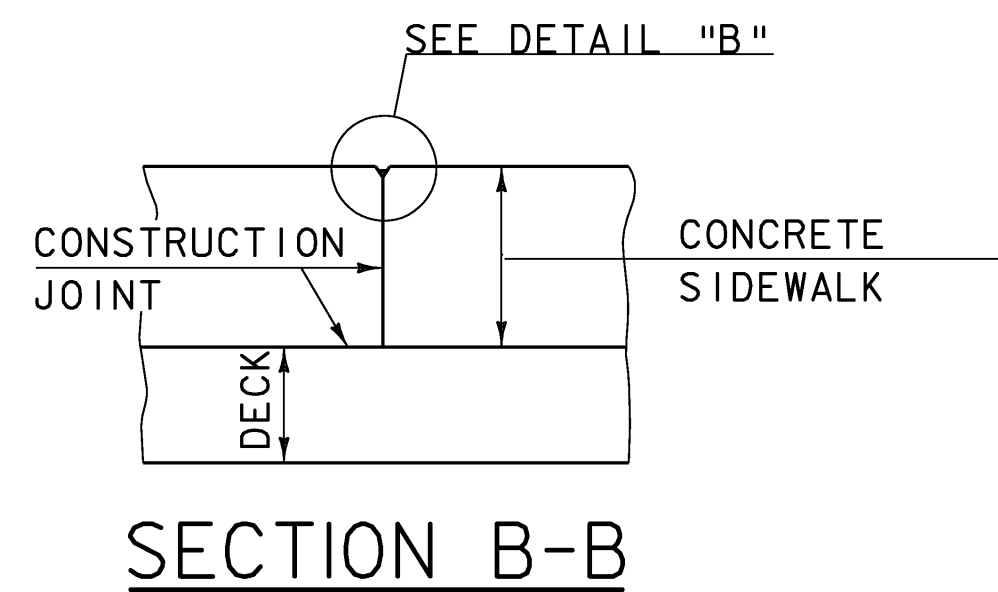


**SECTION B-B**

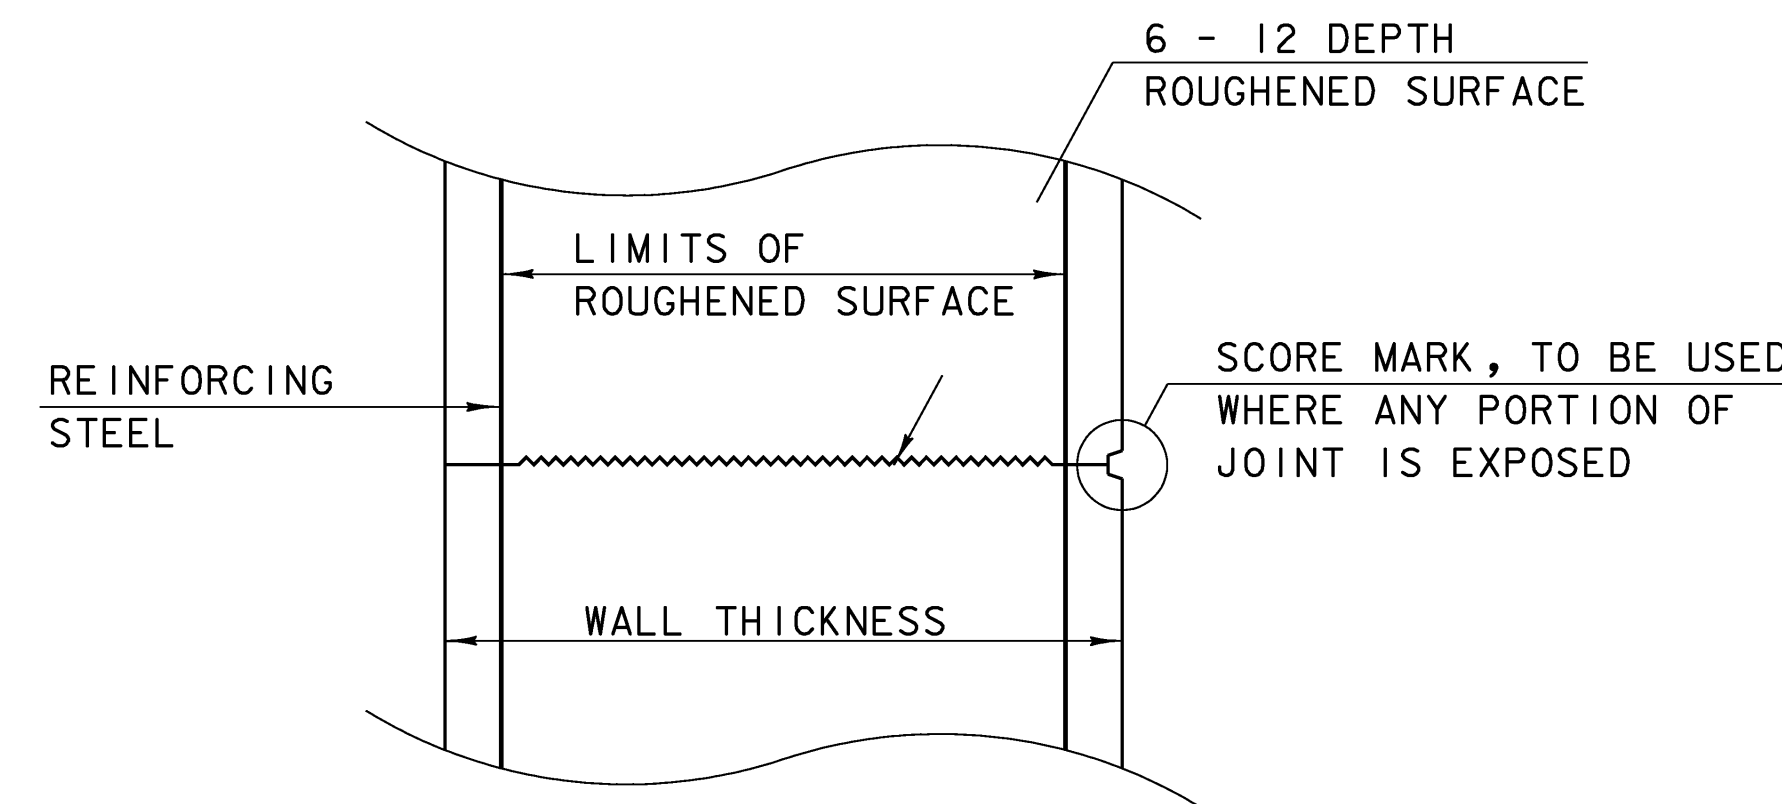


**TYPICAL CONCRETE CONSTRUCTION JOINT**

(NOT TO SCALE)

1. THE SURFACE OF THE CONCRETE CONSTRUCTION JOINTS SHALL BE CLEANED AND FREE OF LAITANCE.
2. IMMEDIATELY BEFORE NEW CONCRETE IS PLACED, ALL CONSTRUCTION JOINTS SHALL BE WETTED AND STANDING WATER REMOVED.

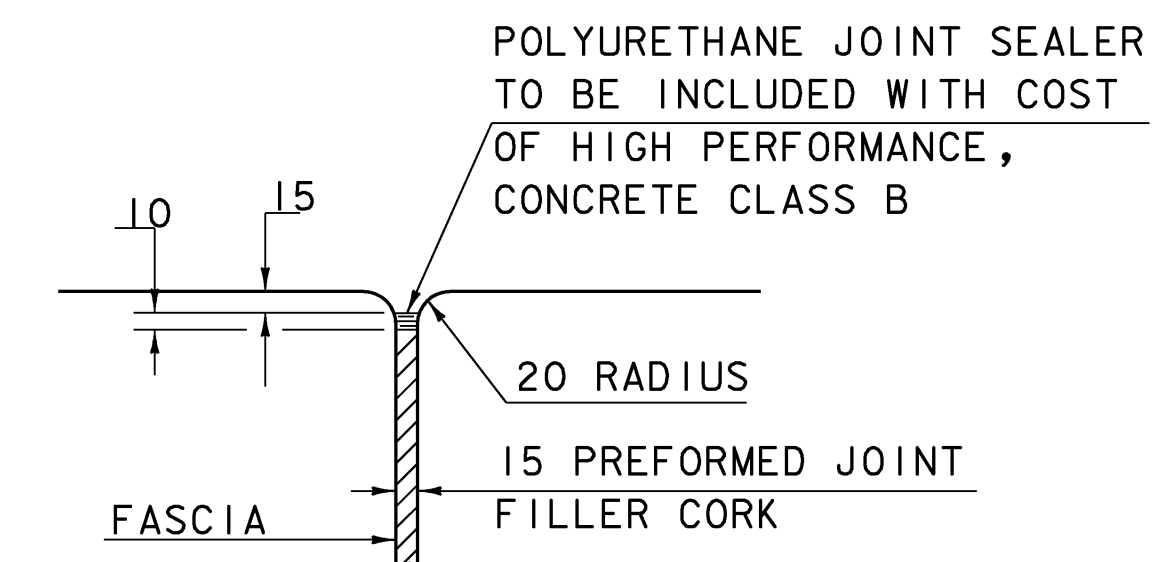

**JOINT BETWEEN FASCIA AND WINGWALL**

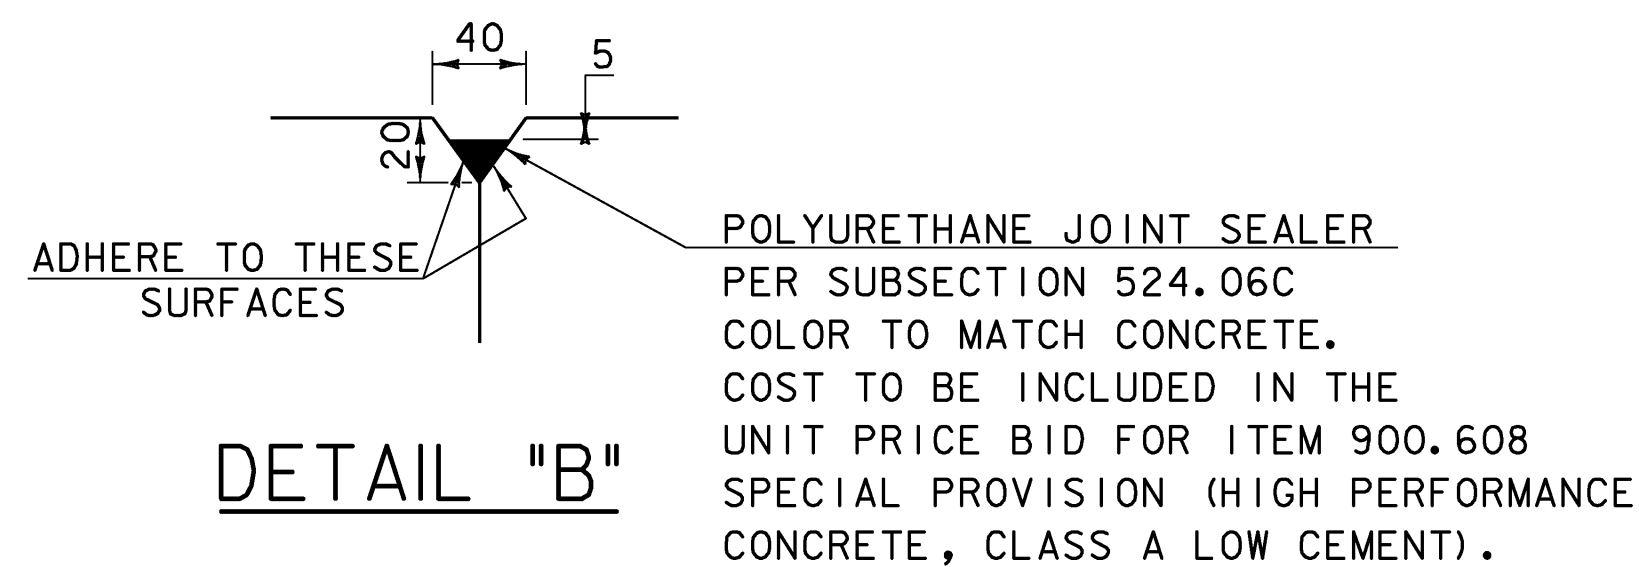

**DETAIL "B"**

**SUPERSTRUCTURE DETAILS**

PROJECT NAME:	BRATTLEBORO	PLOT DATE:	26-MAY-2009
PROJECT NUMBER:	BRF 2000(2)S	DRAWN BY:	D. PETERSON
FILE NAME:	96J228\str\sj228sup.dgn	CHECKED BY:	C. CARLSON
PROJECT LEADER:	R.R. WHITCOMB	SHEET	34 OF 77
DESIGNED BY:	C. CARLSON		
s96228supCRB.1			