


The DFS T-Anchor has a gravity activated toggle head for use in hollow walls and ceilings. Can be used in concrete, steel and wood.

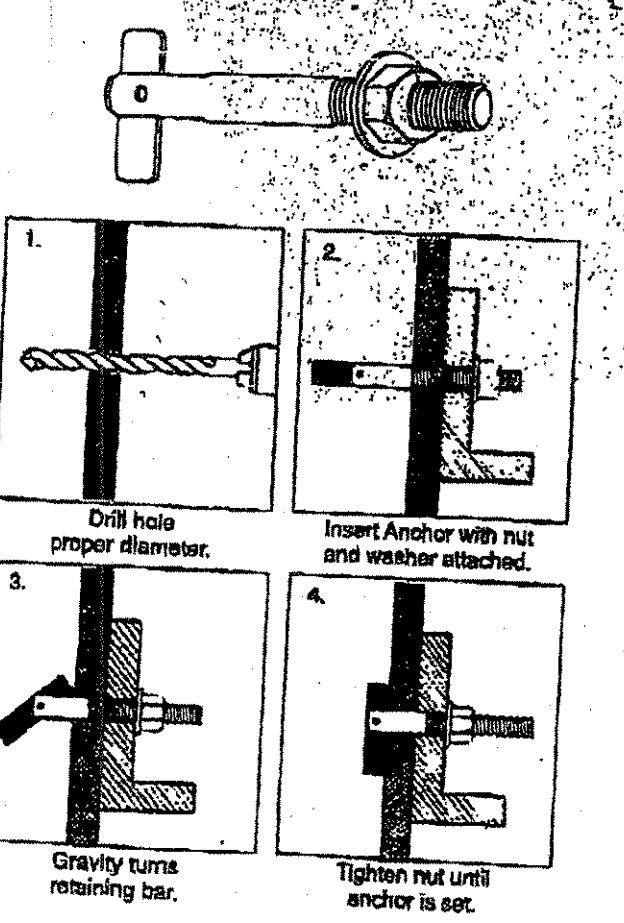

FOR LIGHT TO MEDIUM DUTY FASTENING TO HOLLOW WALLS AND CEILINGS

**T-ANCHORS**

Part Number	Diameter x Total Length	Grip Range	Out Size	Box Qty.
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100
1481215	1/2" x 1 3/8"	1/2" - 1 1/8"	5/16"	100

**TEST PERFORMANCE DATA**

DIAMETER	PULL OUT	SHEAR
1/2" (all lengths)	200 lbs.	1500 lbs.
5/16" (all lengths)	100 lbs.	2500 lbs.
3/8" (all lengths)	1000 lbs.	3000 lbs.

T-Anchors comply with these industry standards:  
 • Meets or exceeds G.S.A. Standards G.S.A. FF-8-588C  
 • Meets load factors in compliance with A.N.S.I. A58.1  
 • Meets plating standards in compliance with A.S.T.M. B-335  
 • Products tested in accordance with A.S.T.M. E-488.88

*Rejected*  
*W. J. Jupp 8/9/07*  
*See Attached Letter*