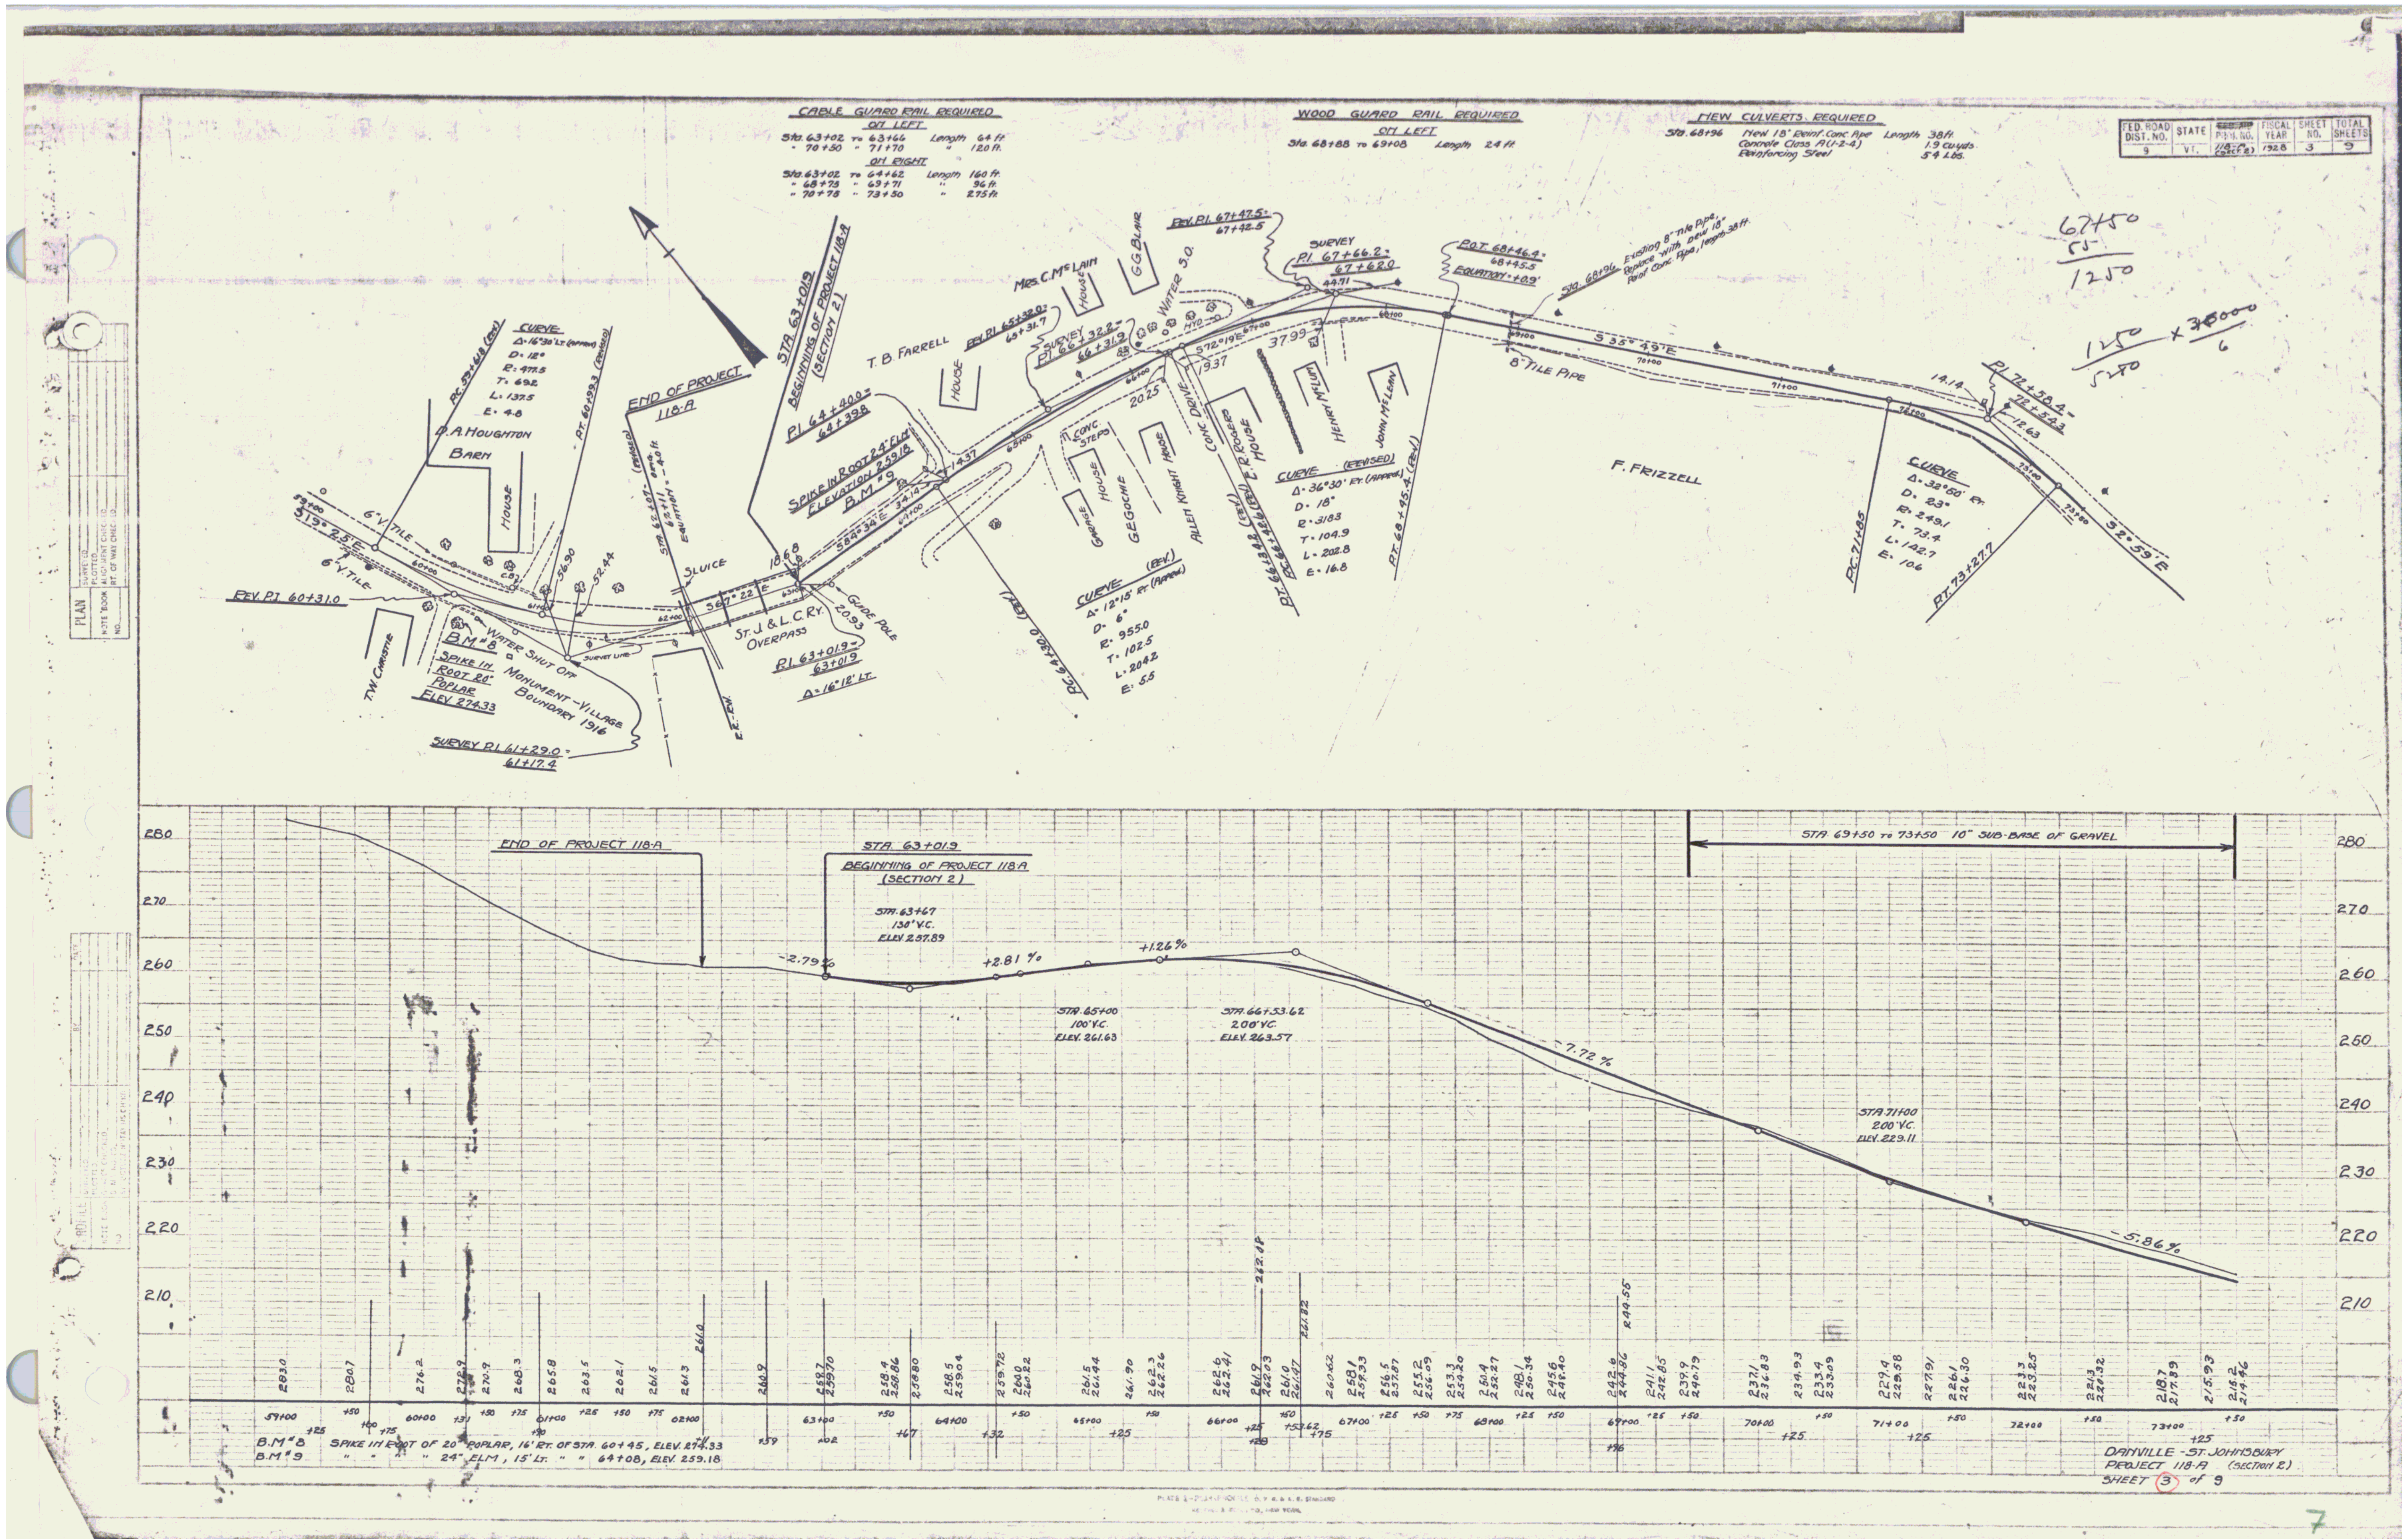
CABLE GUARD RAIL REQUIRED
ON LEFT
Sta. 63+02 to 63+66 Length 64 ft.
" 70+50 " 71+70 " 120 ft.
ON RIGHT
Sta. 63+02 to 64+62 Length 160 ft.
" 68+75 " 69+71 " 96 ft.
" 70+75 " 73+50 " 275 ft.
WOOD GUARD RAIL REQUIRED
ON LEFT
Sta. 68+88 to 69+08 Length 24 ft.
NEW CULVERTS REQUIRED
Sta. 68+96 New 18" Reinf. Conc. Pipe Length 38 ft.
Concrete Class A (1-2-4) 1.9 cu.yds.
Reinforcing Steel 54 Lbs.
FED. ROAD DIST. NO. 9
STATE VT.
PROJ. NO. 118-A (SECT. 2)
FISCAL YEAR 1928
SHEET NO. 3
TOTAL SHEETS 9
END OF PROJECT 118-A
STA. 63+01.9
BEGINNING OF PROJECT 118-A (SECTION 2)
T. B. FARRELL
Mrs. C. McLAIN
G. G. BLAIR
F. FRIZZELL
B. A. HOUGHTON
BARN
HOUSE
SLUICE
ST. J. & L. C. RY. OVERPASS
T. W. CHRISTIE
B.M. 8
B.M. 9
WATER SHUT OFF
MONUMENT - VILLAGE BOUNDARY 1918
8" TILE PIPE
STA. 69+50 TO 73+50 10" SUB-BASE OF GRAVEL
+2.81 %
+1.26 %
-2.79 %
-7.72 %
-5.86 %
STA. 63+67
130' V.C.
ELEV. 257.89
STA. 65+00
100' V.C.
ELEV. 261.63
STA. 66+53.62
200' V.C.
ELEV. 263.57
STA. 71+00
200' V.C.
ELEV. 229.11
B.M. 8 SPIKE IN ROOT OF 20" POPLAR, 16' RT. OF STA. 60+45, ELEV. 274.33
B.M. 9 " " " 24" ELM, 15' LT. " " 64+08, ELEV. 259.18
DANVILLE - ST. JOHNSBURY
PROJECT 118-A (SECTION 2)
SHEET 3 of 9

7