





































"SHEAR BRACE" AT PIER 1 NORTH SIDE  
2/3'S CRACKED THROUGH



8.5"  $\frac{02}{12}$

8 1/4"  $\frac{41}{50}$

5/98

8"  $\frac{41}{50}$  - 8 1/4"

8 1/4"  $\frac{02}{12}$





$8\frac{5}{8}$ "  $0\frac{2}{4}$ "

$8\frac{1}{4}$ "  $1\frac{1}{2}$ "

$5/16$

$4\frac{1}{2}$ " -  $8\frac{1}{4}$ "

8"

$8\frac{1}{4}$ "  $0\frac{2}{4}$ "

























161915  
NID 202  
S.E. PIN  
161915


SIGNIFICANT WEAR OF GUSSET ALONG PIN SLOT  
AT SOUTHEAST PIN CONN.





2 1/2" dia.  
1 1/2" dia.  
4/16"



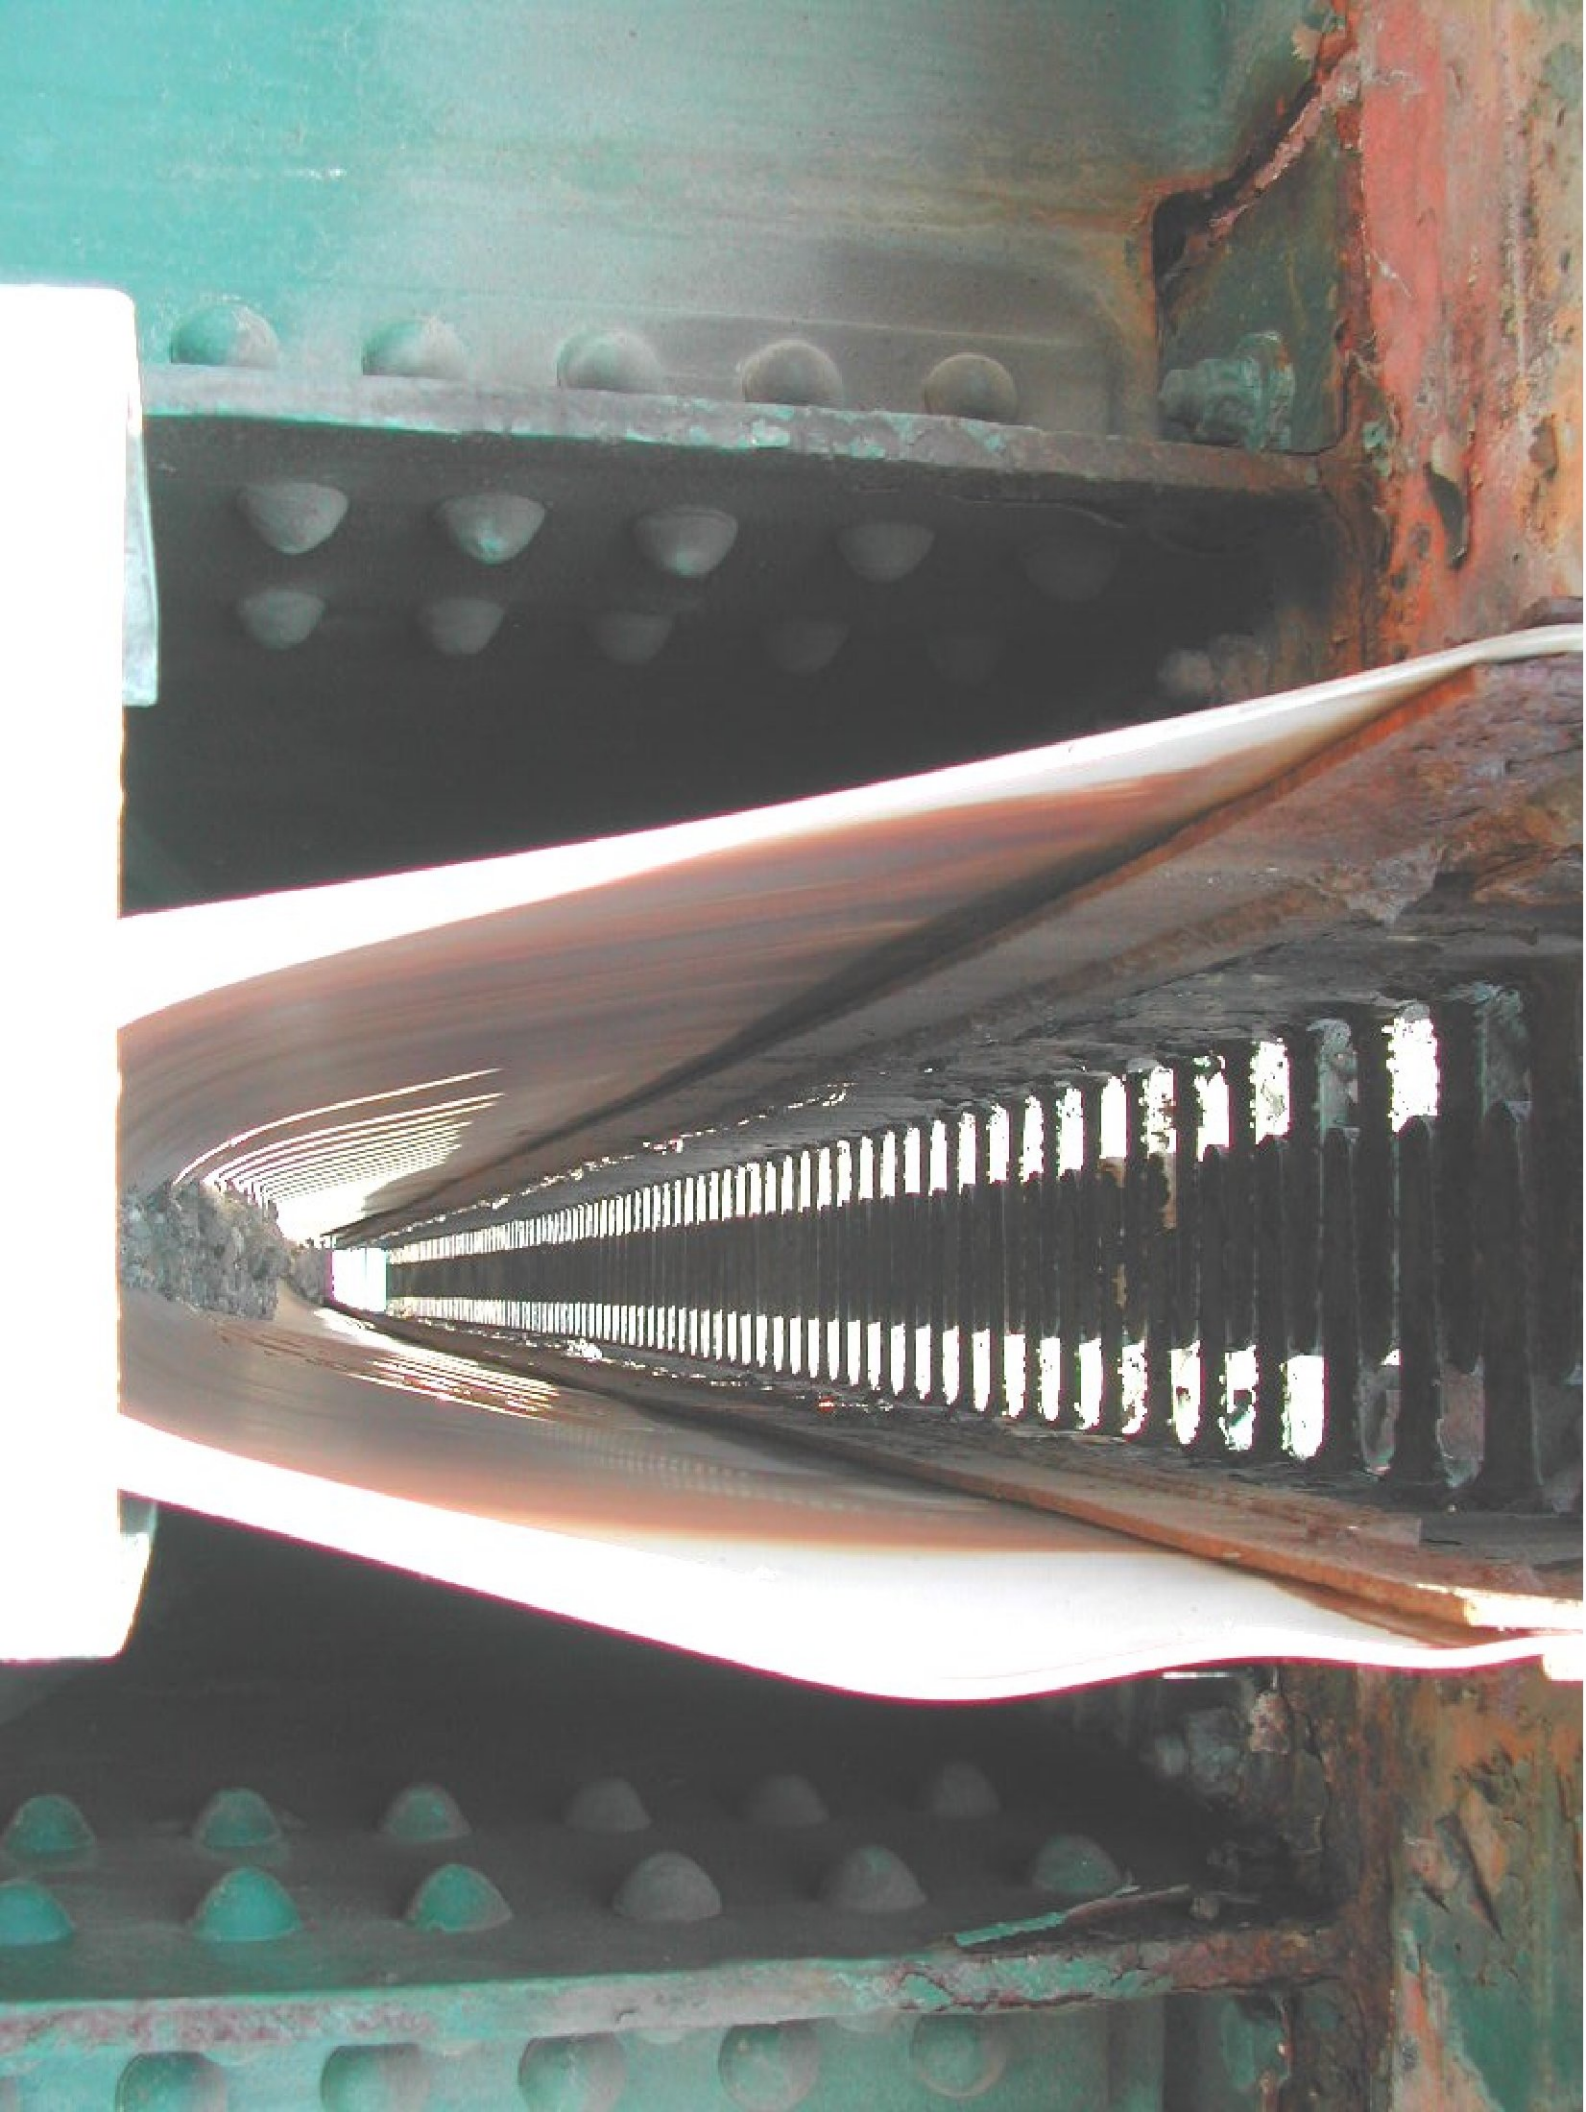









1/2" IN 3'  
4/2000  
Q 4009















4.5" Deep  
Up stream Truss  
Bottom chord  
East Face  
2nd panel  
point  
of  
south  
flange







