

CROSS HATCHED AREAS (TYP.) ARE TO BE EXCAVATED TO A DEPTH OF 3' MIN. OR AS DIRECTED BY THE RESIDENT ENGINEER. THE EXCAVATED AREAS SHALL BE GRADED W/ SUBBASE OF CRUSHED GRAVEL (FINE GRADED) AND PAVED W/3' BCP SEE DETAIL 6

REMOVE EXISTING AERIAL ELECTRIC

PLACE SILT FENCE
PLACE HAY BALES

APPROXIMATE LOCATION OF CHLORIDE TANK. TO BE BUILT AND INSTALLED BY DISTRICT. (NOT IN CONTRACT)

NEW 35' X 6" UNDERDRAIN CARRIER PIPE
PLACE HAY BALES (TYP.)



TYPE II STONE FILL W/ GEOTEXTILE UNDER STONE FILL
PLACE EROSION MATTING IN DITCH

NEW 120' X 6" UNDERDRAIN
PLACE HAY BALES & SILT FENCE TO PROTECT SLOPE

TOPSOIL & SEED
PLACE EROSION MATTING IN DITCH

LEGEND

- PUG
- PROPOSED UNDERGROUND UTILITIES
- PLACE TOPSOIL AND SEED

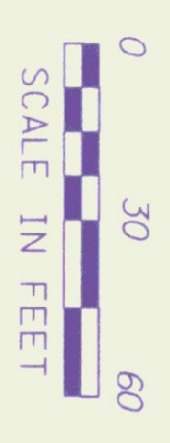

PROJECT:	RANDOLPH SALT SHED	PROJECT NO.:	STP SALT(7)
DESIGN FILE NAME:	98216BDR.DGN	PLOT DATE:	12 FEB 1999
IPARM FILE NAME:		SURVEY DATE:	7/98
SURVEYED BY:	GLD ENGINEERS	DRAWN BY:	J. LUTHER
SOUND LEADER:	J. WARNER	SHEET:	SD-2