
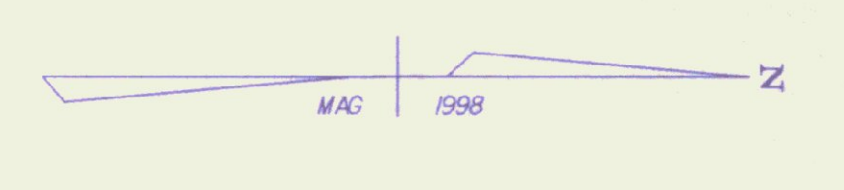
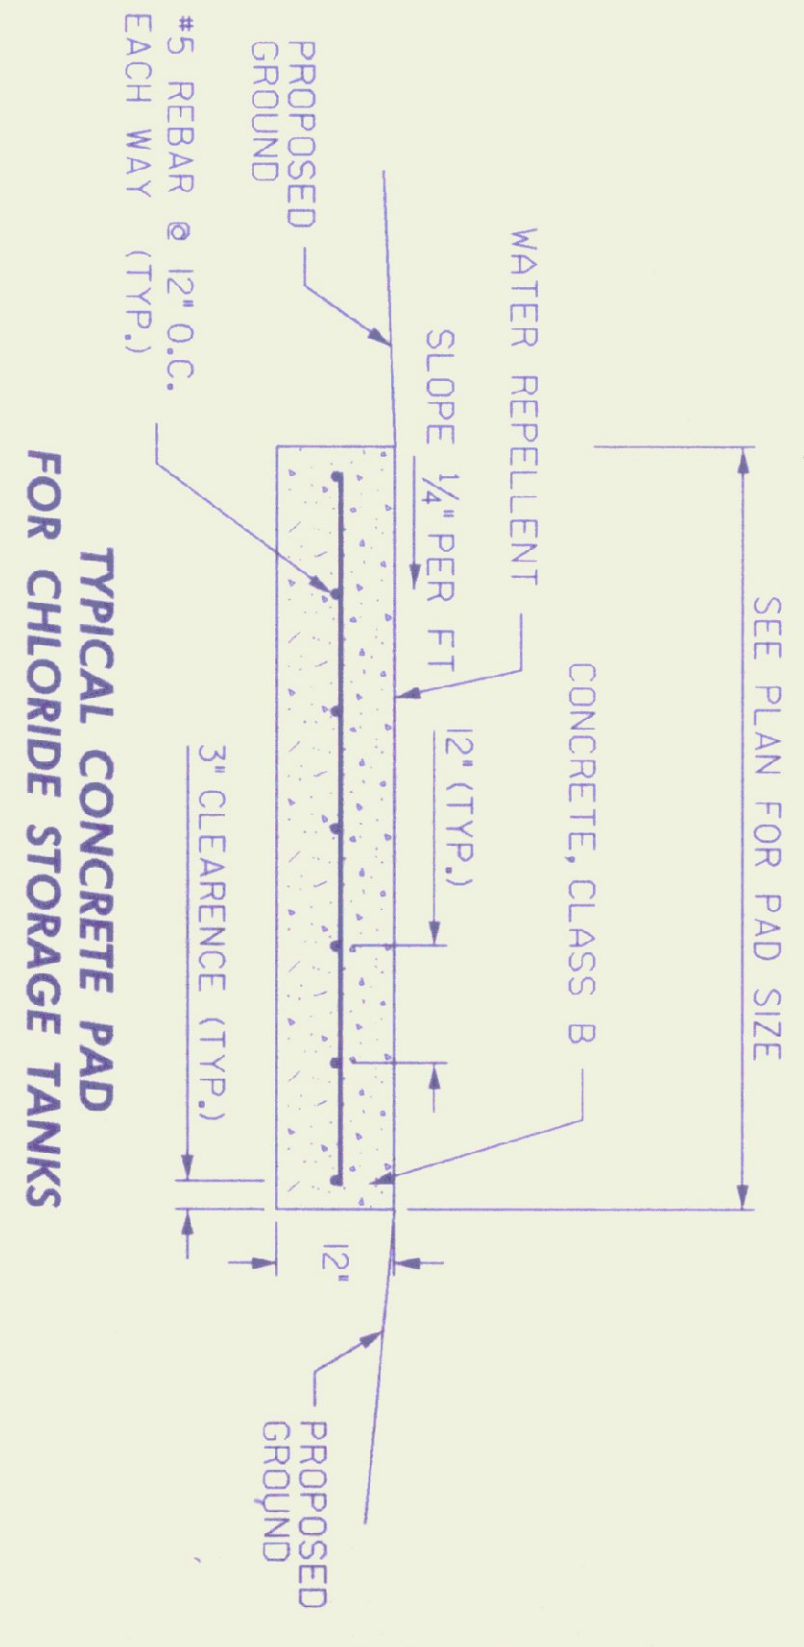


RELOCATE EXISTING CHLORIDE TANK TO SOUTH WEST CORNER OF PROPOSED WESTERN SHED. TANK(S) SHOULD BE PLACED ON A 45' x 20' x 1' DEEP CONCRETE SLAB WITH #5 REBAR 12" O.C. BOTH DIRECTIONS. (SEE DETAIL ON THIS SHEET) POSITION OF TANK(S) WILL BE COORDINATED WITH THE DISTRICT. TEMPORARY STORAGE OF EXISTING CHLORIDE WILL BE HANDLED BY THE DISTRICT.

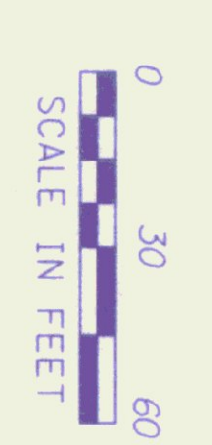

**LEGEND**

- PUG — PROPOSED UNDERGROUND UTILITIES
- EUGA — EXISTING UNDERGROUND UTILITIES (ABANDONED)
- EUG — EXISTING UNDERGROUND UTILITIES
- EXISTING SURFACES REQUIRING EARTH BORROW SHALL BE SCARIFIED, PAID AS ITEM 212.20, SCARIFYING PAVEMENT, PRIOR TO PLACING BORROW.
- CONSTRUCT PAVED DRIVE WITH 12" SUBBASE OF CRUSHED GRAVEL (FINE GRADED) AND PAVE WITH 3" BGP. EXCAVATION FOR THIS AREA SHALL BE PAID AS ITEM 203.15, SEE DETAIL H

PROJECT:	ROYAL TON SALT SHED	PROJECT NO. 1:	STP SALT (8)
DESIGN FILE NAME:	9828dldc.dgn	DATE:	05 MAR 1999
IP/AM FILE NAME:		SURVEY DATE:	OCT 98
SURVEYED BY:	C.D. CONSULTING ENGINEERS	DRAWN BY:	P. HOLT
SQUAD LEADER:	L. WARNER	SHEET:	SD-2