


REVISIONS AND CORRECTIONS
 JUNE 27, 1980 - ORIGINAL APPROVAL
 JUNE 1, 1994 - REISSUED, WITHOUT CHANGE,
 UNDER NEW SIGNATURES.

APPROVED



APPROVED FOR THIS PROJECT
 AND/OR DESIGN REPRESENTATION
 FEMA FINAL APPROVAL TENDENCY

Stephen D. White, P.E.
 DIRECTOR OF ENGINEERING
William M. Murphy, P.E.
 DESIGN ENGINEER


BOUNDARY MARKERS

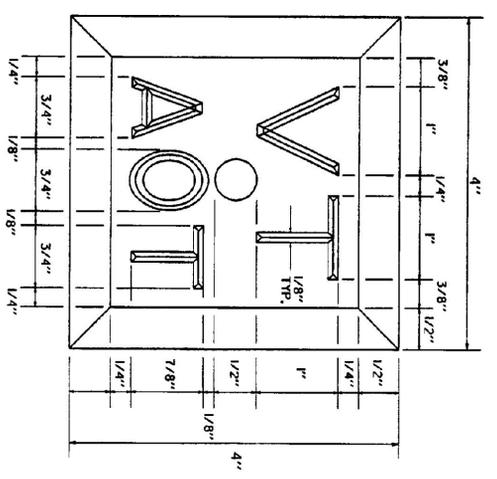

LETTERING DETAIL
 (ALL LETTERS TO BE COUNTERSUNK 1/8")
 SCALE: FULL SIZE

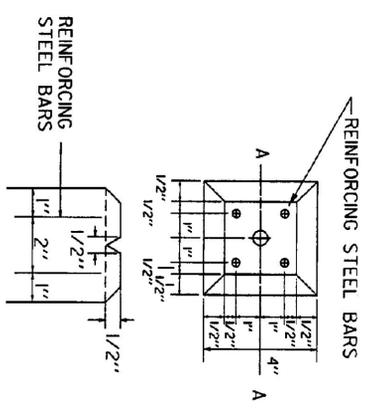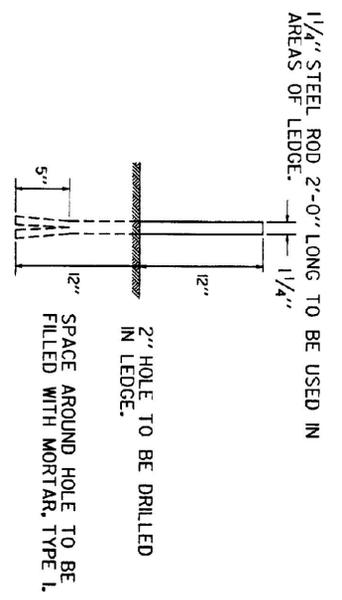

BOUNDARY MARKERS TO BE CONSTRUCTED OF CONCRETE CLASS A.
 4 REINFORCING STEEL BARS ARE NO. 3 DEFORMED BARS 4'-4" LONG.
 BOUNDS ARE TO BE SET WITH 6" ABOVE GROUND, OR AS DIRECTED BY THE ENGINEER.
 IN AREAS WHERE MOWING OPERATIONS ARE REQUIRED, BOUNDS SHALL BE SET FLUSH WITH THE GROUND.

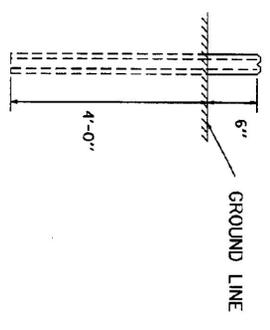

BOUNDARY MARKERS



STANDARD
 J-1