
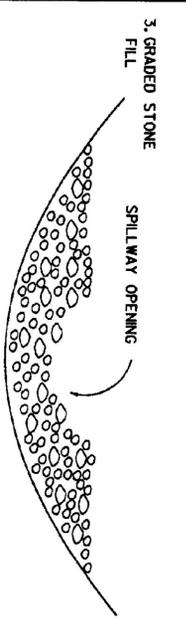


REVISIONS AND CORRECTIONS  
 JUL. 5, 1972 - ORIGINAL APPROVAL  
 JUNE 1, 1994 - REISSUED, WITHOUT CHANGE,  
 UNDER NEW SIGNATURES.

APPROVED


APPROVED FOR THIS PROJECT  
 AND/OR DESIGN IMPLEMENTATION,  
 FEMA FINAL APPROVAL PENDING.

*Signature*  
 DIRECTOR OF ENGINEERING  
 DESIGN ENGINEER


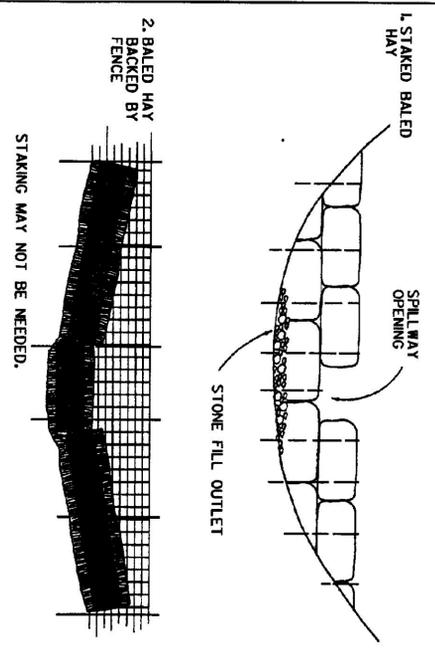


DAM SHOULD EXTEND FAR ENOUGH UP DITCH SIDE SLOPES TO EFFECTIVELY POND THE RUNOFF AND PREVENT EROSION AND WASHOUT.


TYPES OF TEMPORARY DAMS

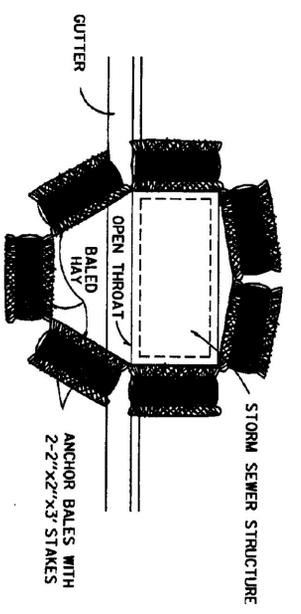


INLET PROTECTION  
 TEMPORARY BARRIER - HAY BALES

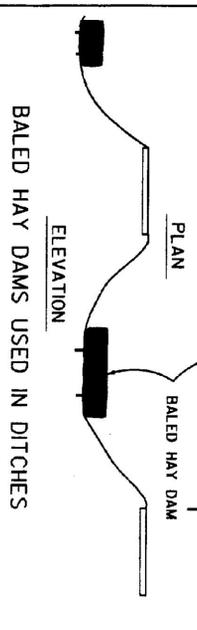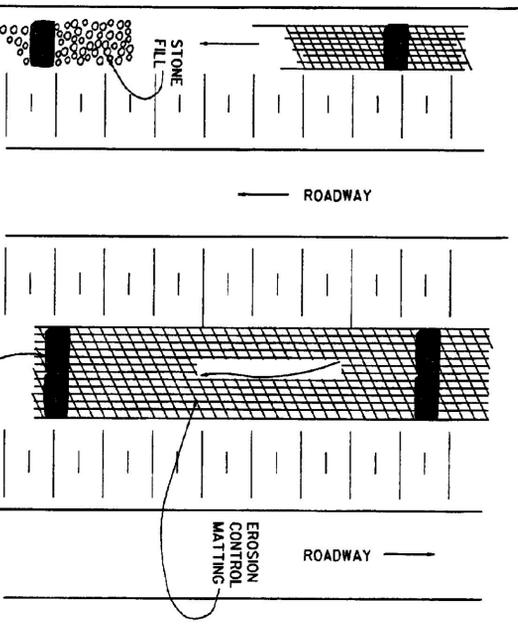



BALED HAY DAMS USED IN DITCHES

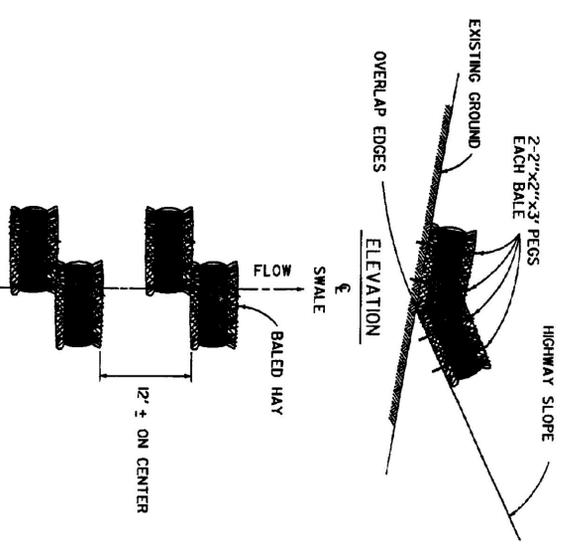

TO BE USED IN LOCATIONS WHERE THE EXISTING GROUND SLOPES TOWARD THE EMBANKMENT. BALES WILL BE ALLOWED TO ROT IN PLACE.  
 BALED HAY EROSION CHECKS

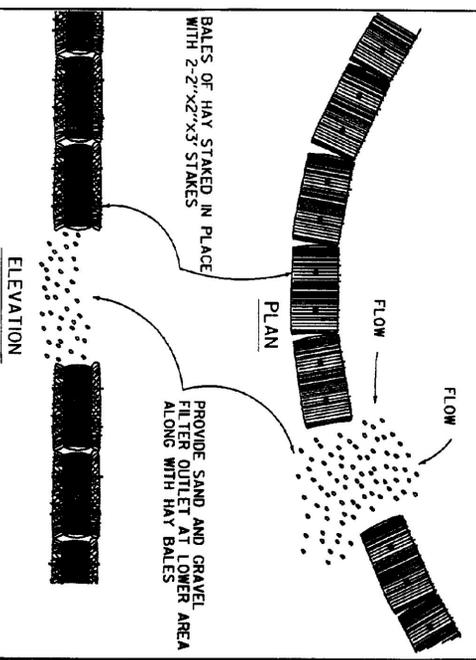


BALED HAY DAMS ALONG TOE OF SLOPE

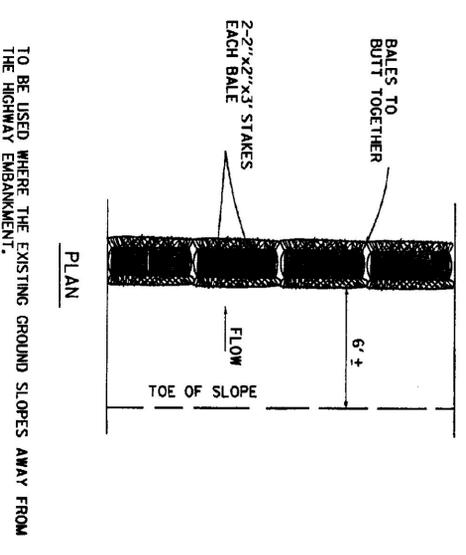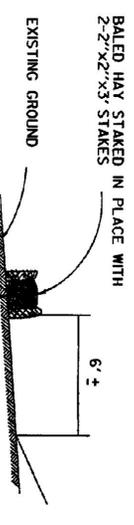

TO BE USED WHERE THE EXISTING GROUND SLOPES AWAY FROM THE HIGHWAY EMBANKMENT.  
 BALED HAY EROSION CHECKS

# TEMPORARY EROSION CONTROL DETAILS



# STANDARD T-2