




1 TYPICAL SECTION THROUGH TRUCK PARKING  
N.T.S.

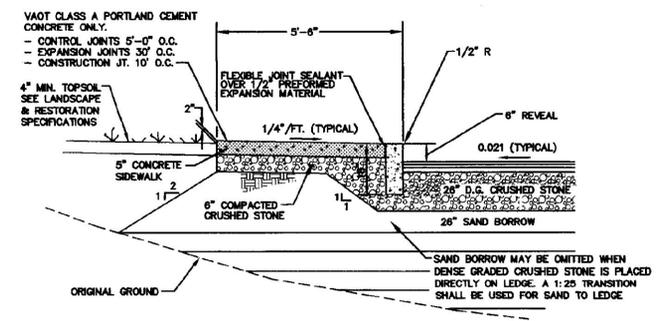


2 TYPICAL SECTION (TRUCK & RV PARKING AREA)  
N.T.S.

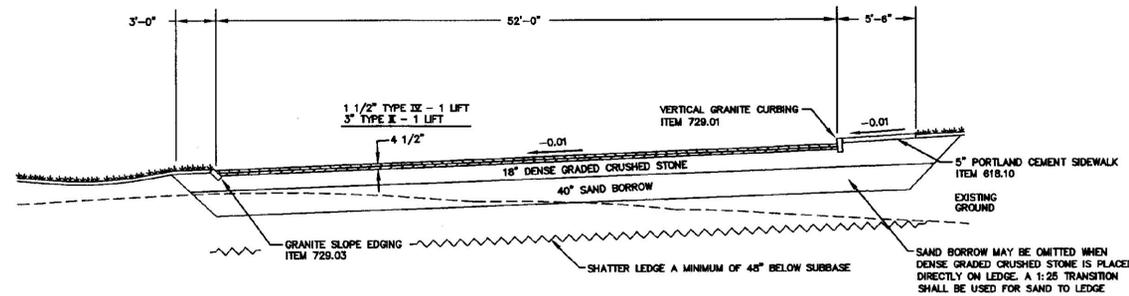


3 TYPICAL SECTION THROUGH CAR PARKING  
N.T.S.

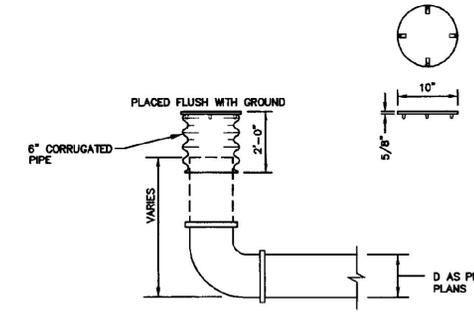


4 UNDERDRAIN FLUSHING BASIN  
N.T.S.

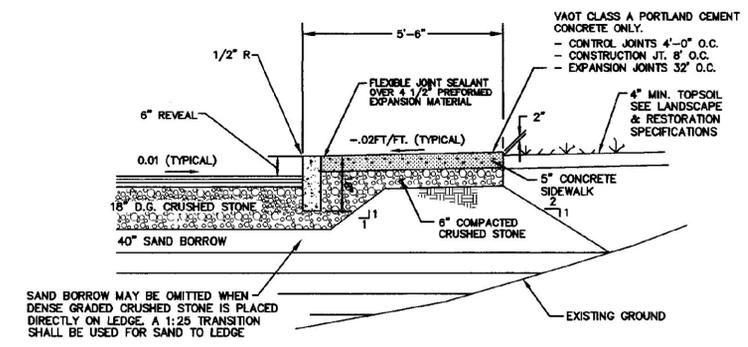


5 TYPICAL SECTION (CAR PARKING AREA)  
N.T.S.

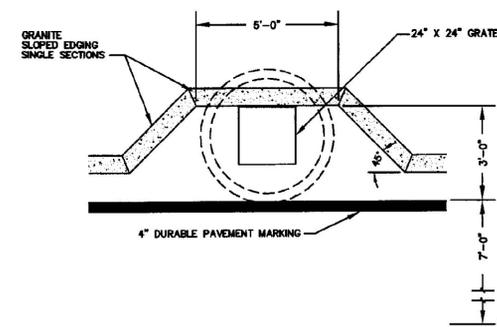


6 TYPICAL CATCH BASINS 6 & 7  
N.T.S.

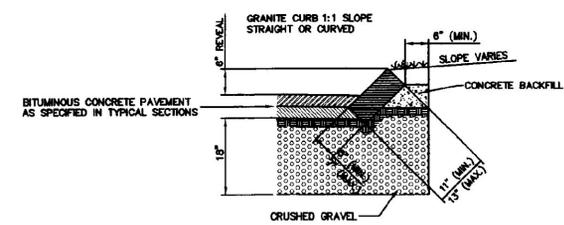


7 SLOPED GRANITE EDGING  
N.T.S.

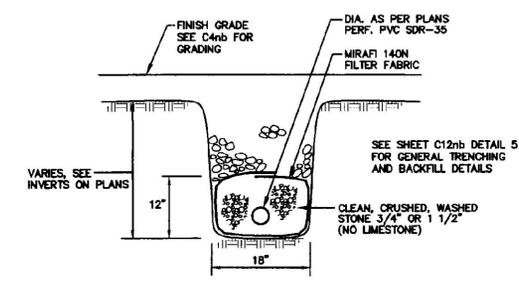


8 UNDERDRAIN UNDER NON-PAVED AREAS  
N.T.S.

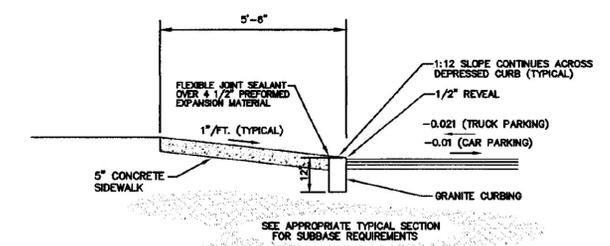


9 TYPICAL SECTION DEPRESSED GRANITE CURB  
N.T.S.

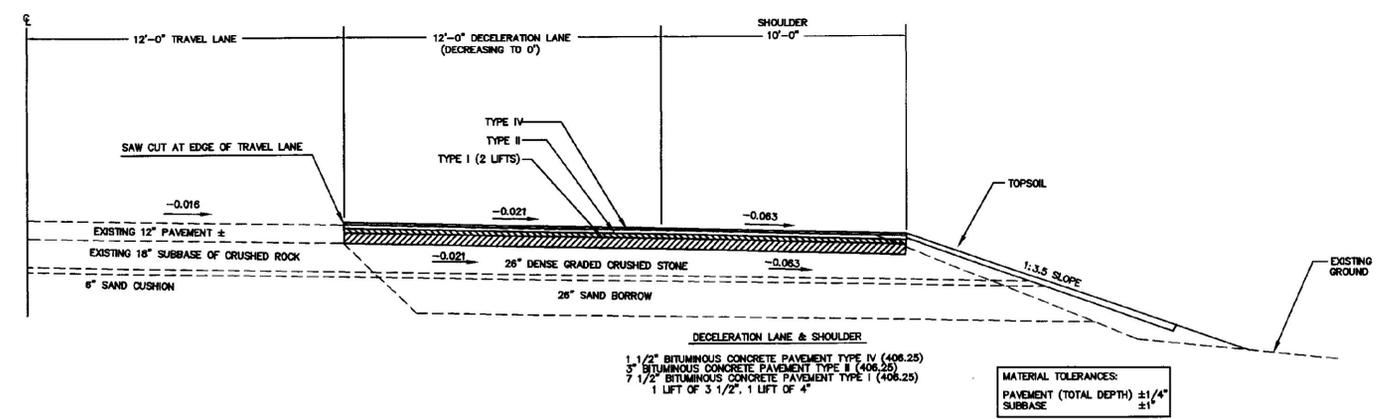

10 TYPICAL SECTION DECELERATION LANE  
N.T.S.

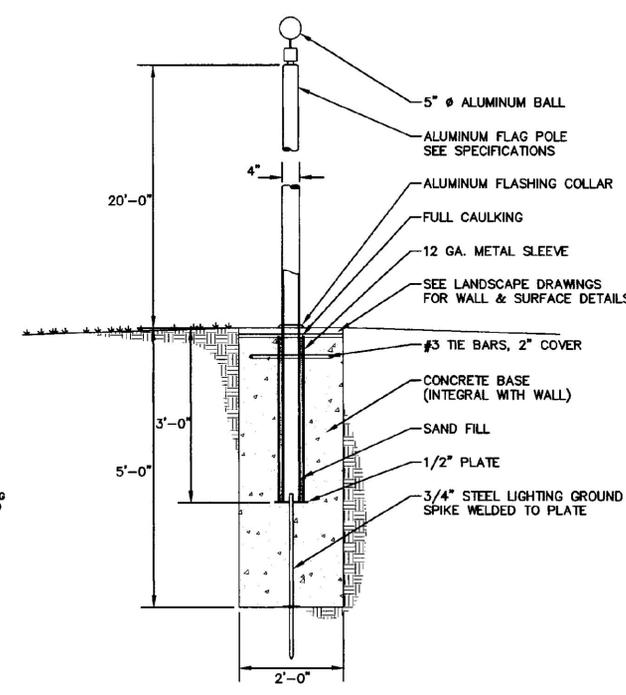

11 FLAGPOLE ANCHOR  
N.T.S.

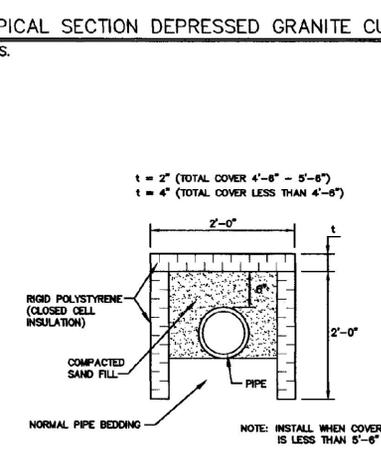

12 WATER/SEWER INSULATION DETAIL  
N.T.S.

RADIUS FOR STONES WITH SQUARE JOINTS	MAXIMUM LENGTH
15' - 25'	18"
27' - 40'	24"
41' - 55'	30"
40' - 55'	36"
70' - 85'	42"
86' - 95'	48"
96' - 109'	54"
OVER 109'	60"

NOTES:  
 1. ADJOINING STONES OF STRAIGHT CURB LAID ON CURVES SHALL HAVE THE SAME OR APPROXIMATELY THE SAME LENGTH.  
 2. MINIMUM LENGTH OF STRAIGHT CURB STONES = 18"  
 3. MAXIMUM LENGTH OF STRAIGHT CURB STONES = 6'  
 4. MAXIMUM LENGTH OF STRAIGHT CURB STONES LAID ON CURVES - SEE CHART.  
 5. NOT TO BE USED FOR RADIUS LESS THAN 10'.

REVISIONS	BY

COPYRIGHT © 2001  
CHAMPLAIN CONSULTING ENGINEERS  
ALL RIGHTS RESERVED

CHAMPLAIN CONSULTING ENGINEERS  
85 PRIM ROAD, P.O. BOX 453  
COLCHESTER, VERMONT 05446  
(802) 863-8060  
(802) 864-1878 FAX



INTERSTATE 89 NORTHBOUND  
WILLISTON INFORMATION CENTER  
DETAILS  
PROJECT # IM-BLDG(4)  
VERMONT  
WILLISTON

DRAWN	CCE
CHECKED	PD
SCALE	AS NOTED
DATE	01/16/01
JOB NO.	93114
SHEET	

C13nb  
OF 22 SHEETS