



* OPTICALLY SPACE NUMERALS ABOUT VERTICAL CENTERLINE.
D2-1

SIGN	DIMENSIONS (INCHES)												
	A	B	C	D	E	F	G	H	I	J	K	L	
MIN.	18	24	3/8	3/8	3	3E	2	8E	1/2	7	7	5/2	
STD.	24	30	3/8	3/8	4	4E	2	10E	1/2	9	9	7	
EXPWY.	36	48	3/4	3/4	6	6E	5	14E	2/4	14	14	11	
FWY.	48	60	3/4	1/4	8	8E	4	20E	3	19	14	15	

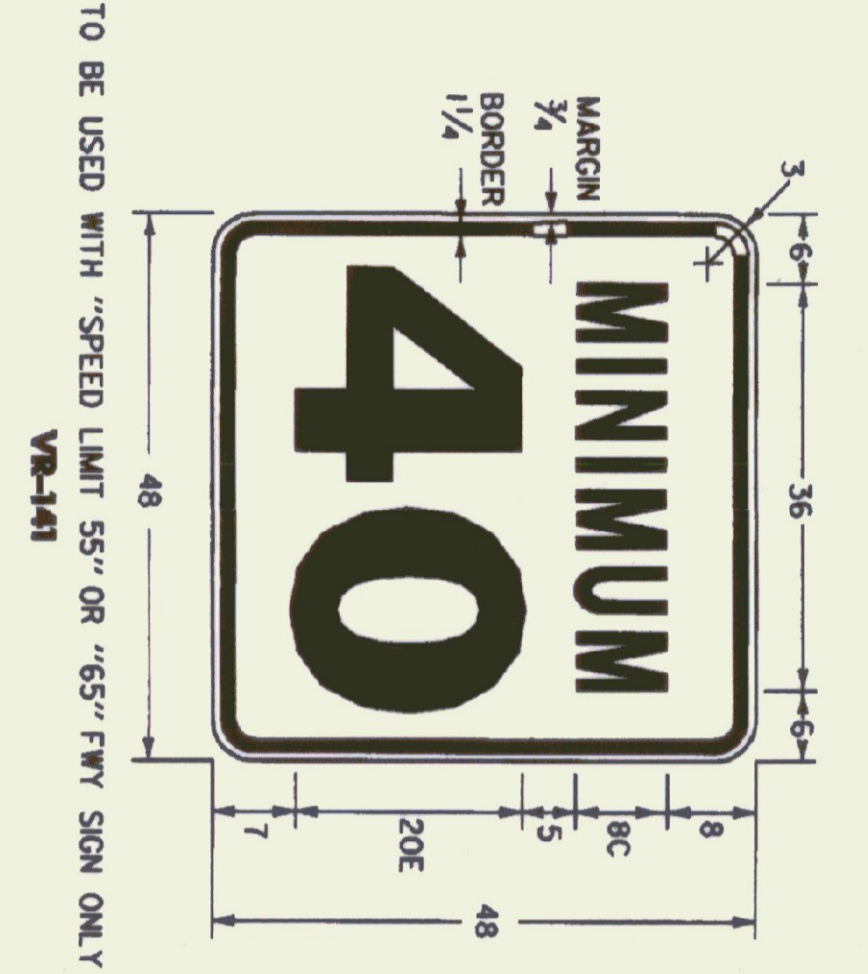


TO BE USED WITH "SPEED LIMIT 55" OR "65" FWY SIGN ONLY
VR-141

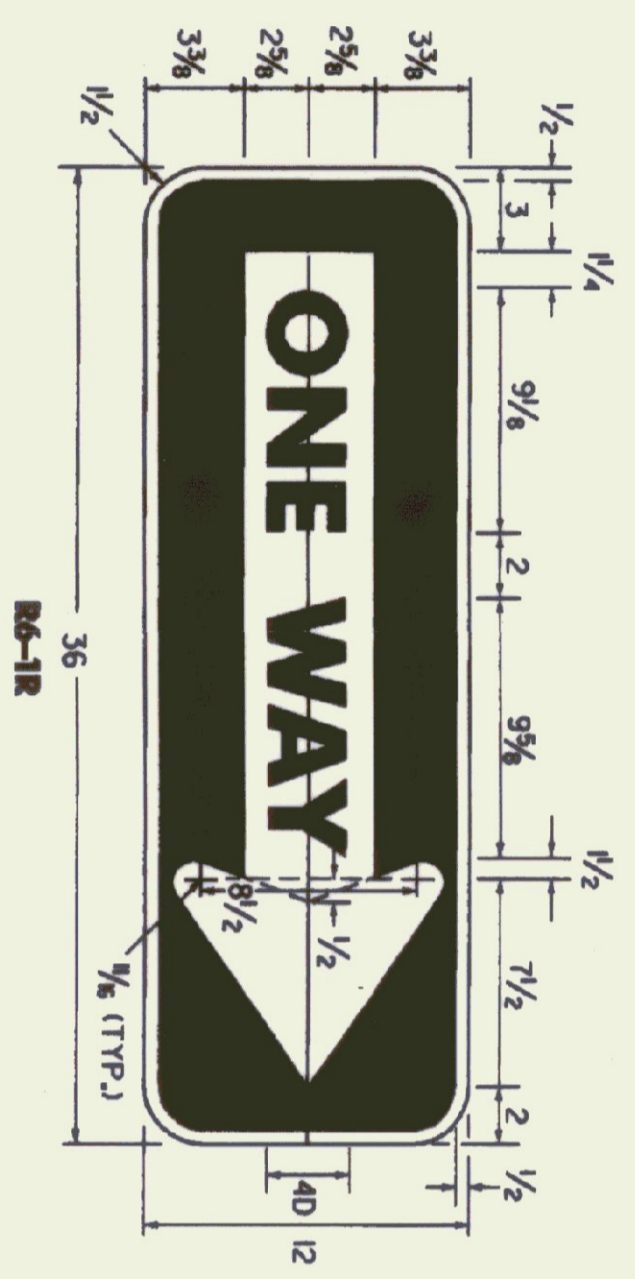


RB-1R



TEXT 4" G. SPACING 2"
VR-002

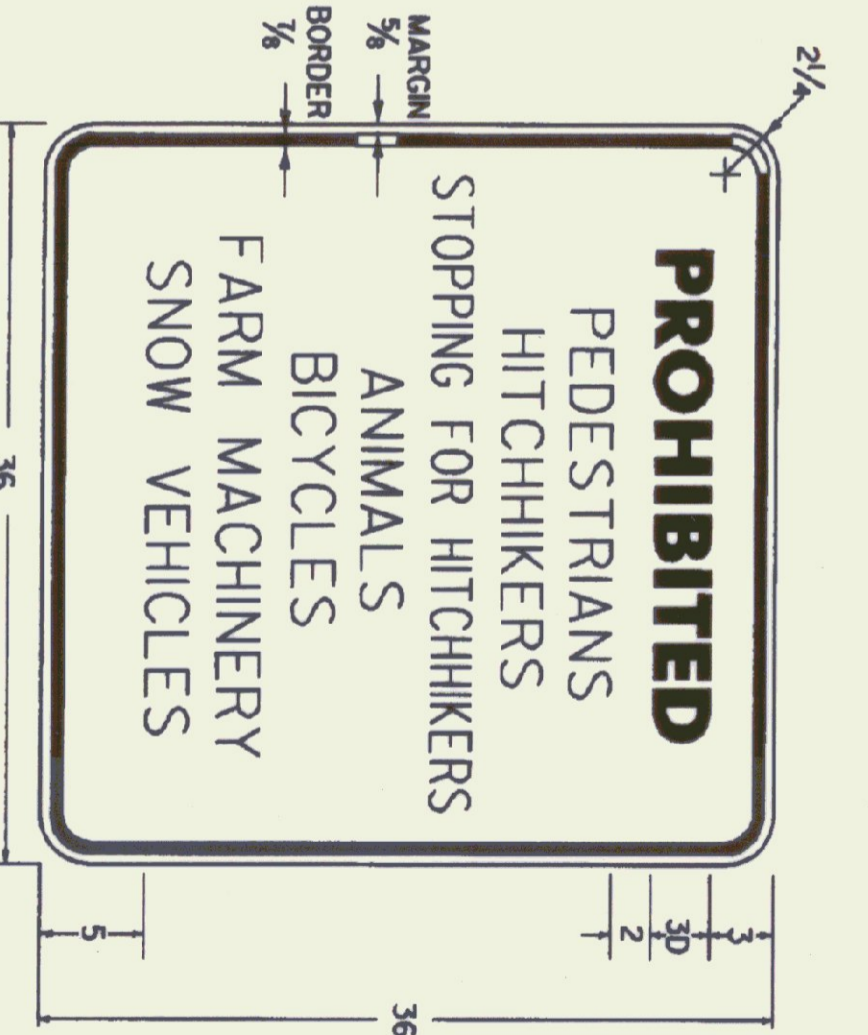


TEXT 2" G. SPACING 1/2", EXCEPT WHERE NOTED.
VR-046

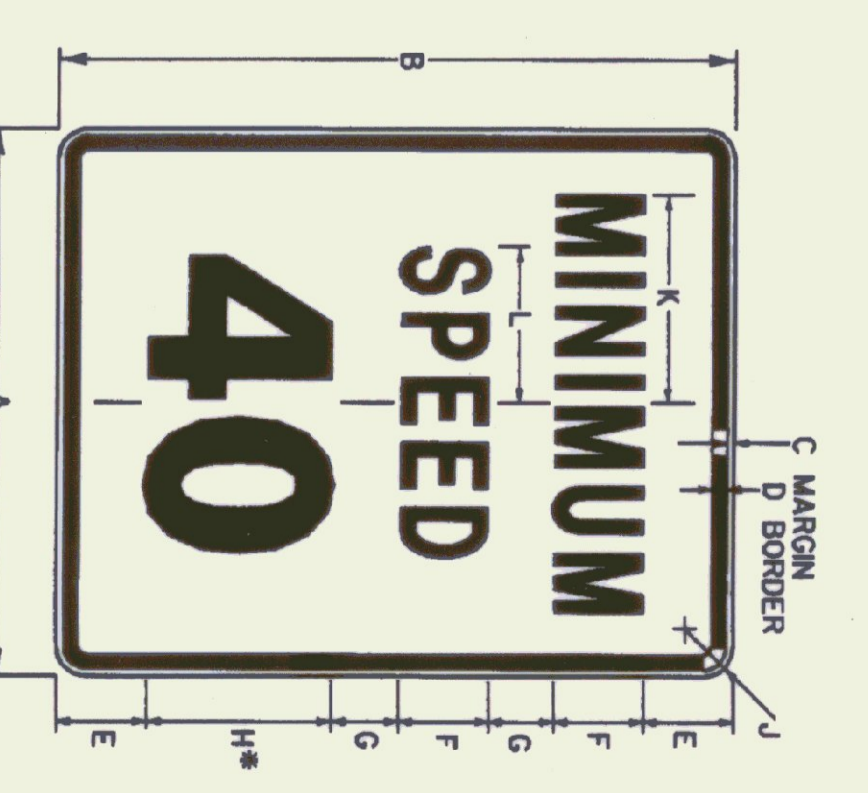


* OPTICALLY SPACE NUMERALS ABOUT VERTICAL CENTERLINE.
D2-4

SIGN	DIMENSIONS (INCHES)												
	A	B	C	D	E	F	G	H	I	J	K	L	
STD.	24	30	3/8	3/8	4	4E	2	10E	1/2	9	9	6	
EXPWY.	36	48	3/4	3/4	6	6E	5	14E	2/4	13	13	10	
FWY.	48	60	3/4	1/4	8	8E	4	20E	3	18	14	15	

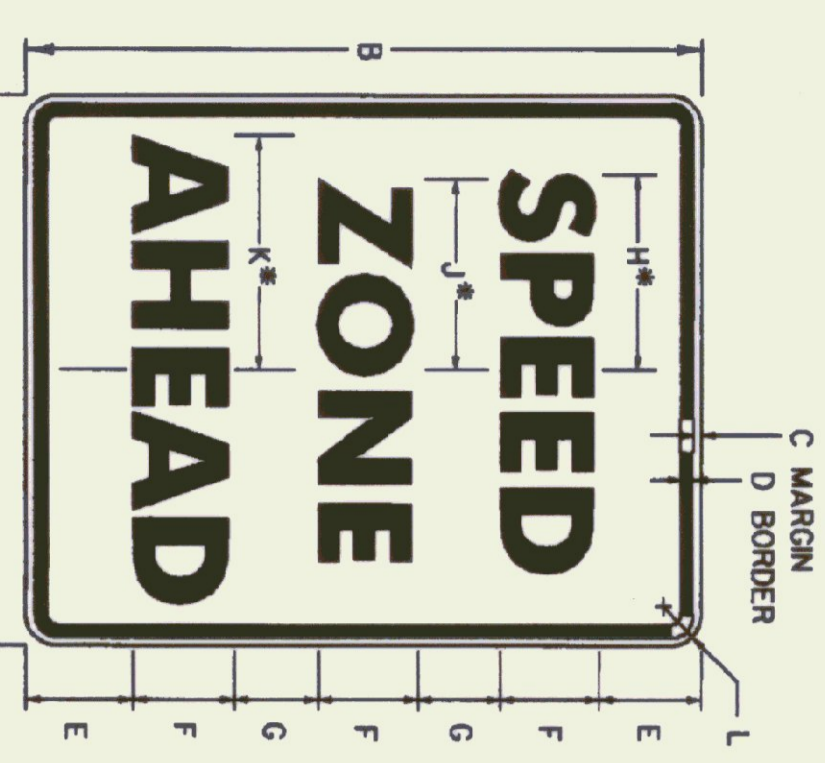


* FOR STD SIZE, REDUCE SPACING 40 %
D2-5C

SIGN	DIMENSIONS (INCHES)												
	A	B	C	D	E	F	G	H	I	J	K	L	
MIN.	18	24	3/8	3/8	3 1/2	4C	2 1/2	6 3/8		5 1/2	7	1/2	
STD.	24	30	3/8	3/8	3 1/2	6C	2 1/2	9 3/8		7 3/8	9 3/4	1/2	
EXPWY.	36	48	3/4	3/4	7	8C	5	13 3/8		11 3/8	14	2 1/4	
FWY.	48	60	3/4	1/4	9	10C	6	17 1/2		13 3/8	17 1/2	3	

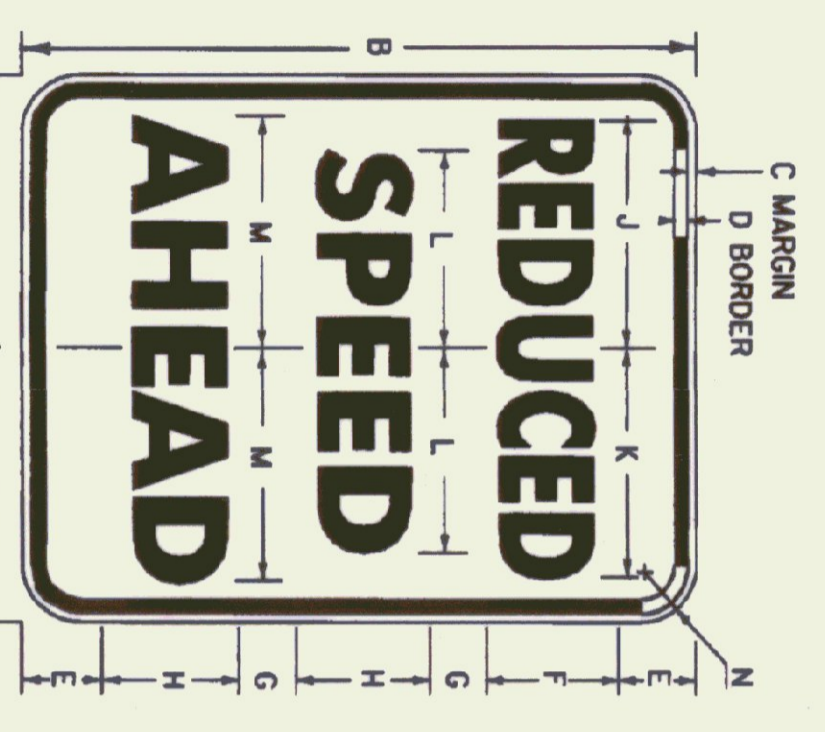


D2-5A

SIGN	DIMENSIONS (INCHES)												
	A	B	C	D	E	F	G	H	I	J	K	L	
MIN.	18	24	3/8	3/8	3 1/2	4B	2 1/2	4C	6 1/8	7	6 3/8	7 1/2	
STD.	24	30	3/8	3/8	3 1/2	6B	2 1/2	6C	10	10 3/4	9 3/4	1 1/2	
EXPWY.	36	48	3/4	3/4	7	8B	5	8C	14 1/4	14 3/4	13 3/8	1 1/2	
FWY.	48	60	3/4	1/4	9	10B	6	10C	17 1/2	18 3/8	17 1/2	3	

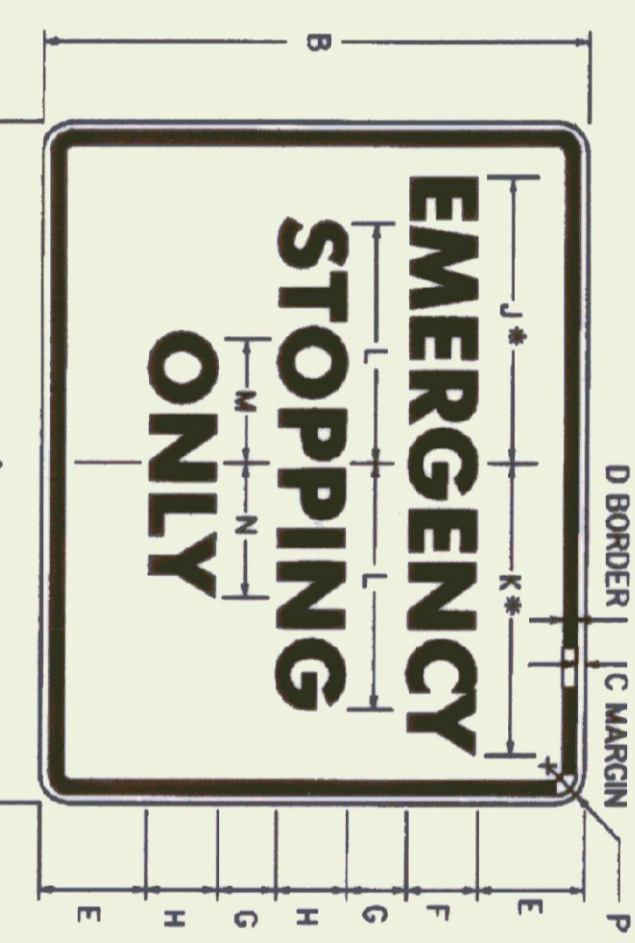

* FOR FWY SIZE, REDUCE SPACING 50 %
RB-7

SIGN	DIMENSIONS (INCHES)												
	A	B	C	D	E	F	G	H	I	J	K	L	
EXPWY.	30	24	3/8	3/8	3 1/2	4C	2 1/2	4D	12 1/2	13	12 3/4	6 3/8	
FWY.	48	36	3/8	3/8	5	6D	4	6D	20 1/8	21 1/8	19 1/8	10 3/8	

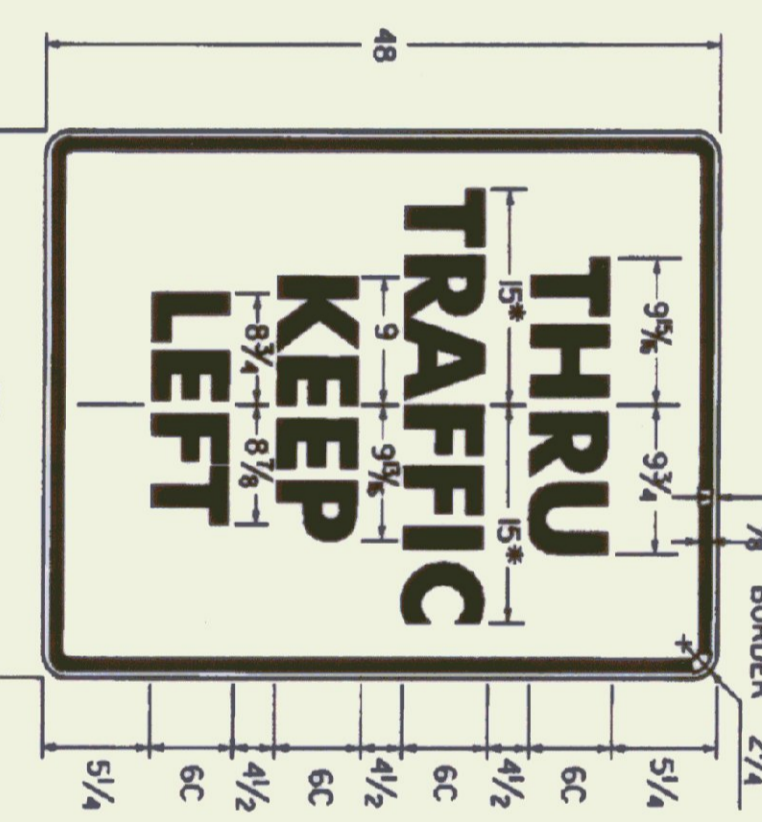

* REDUCE SPACING 25 %
VR-118L

REVISIONS AND CORRECTIONS

OCT. 30, 1987 - DATE OF ORIGINAL ISSUE
SEPT. 20, 1995 - ADDED AND DELETED SIGN DETAILS,
ADDED SIGN ID NUMBERS, MINOR NOTE
REVISIONS.
APPROVED FOR THIS PROJECT
AND/OR DESIGN IMPLEMENTATION,
FHWA FINAL APPROVAL PENDING.

APPROVED

Director of Engineering
Traffic and Safety Engineer

REGULATORY SIGN
DETAILS

REGULATORY SIGN
DETAILS

/trcf/std/std442.dgn : std442.1

GENERAL:
1. ALL DIMENSIONS IN INCHES.

COLORS:
THE REGULATORY SIGNS SHOWN ON THIS SHEET SHALL HAVE BLACK TEXT ON REFLECTORIZED WHITE BACKGROUND UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY THE FEDERAL HIGHWAY ADMINISTRATION OR TRANSPORTATION OFFICIALS AND APPROVED BY THE DEPARTMENT OF TRANSPORTATION, FEDERAL HIGHWAY ADMINISTRATION.

MATERIALS:
THE SIGN BASE MATERIALS USED FOR REGULATORY SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING OF THE MINIMUM THICKNESS NOTED.


FLAT SHEET ALUMINUM	0.060"	0.090"	0.100"
HIGH DENSITY OVERLAIND PLYWOOD	1/2"	1/2"	5/8"
GALVANIZED FLAT SHEET	18 GAGE	16 GAGE	14 GAGE

THE REFLECTIVE MATERIAL FOR GROUND MOUNTED SIGNS SHALL BE AASHTO TYPE II OR III WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE TEXT OF THE SIGNS MAY BE LETTERING FILM, SILK SCREENED OR HAND PAINTED. HAND PAINTING MUST BE COMPARABLE IN QUALITY TO THE RESULTS OBTAINED BY SILK SCREENING.

SPECIFICATIONS:
REGULATORY SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS.

TEXT DESIGN:
LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM WITH THE STANDARD ALPHABET FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS AND DESIGNS DESCRIBED IN THE STANDARD FOR HIGHWAY SIGNS AS SPECIFIED IN THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

OTHER STDS. : NONE REQUIRED

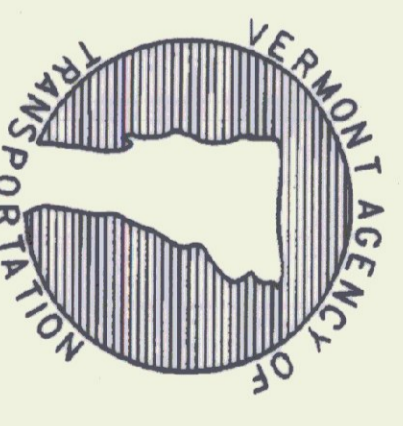

STANDARD
E-142