VAOT Metric

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-1	1-2.5	2.5-10				
VT. ROUTE 17							m^2	m^3	m^2	
FAYSTON:										
1	7+231	7+250	RT		19		19			
2	7+466	7+506	RT		40		40			
3	7+849	7+930	LT		81		81			
4	7+947	8+046	LT		89	10	89	3	10	
5	8+730	8+958	RT		228		228			
6	9+281	9+322	RT		41		41			
7	9+369	9+373	RT		4		4			
WAITSFIELD:										
1	0+000	0+067	RT		60	7	60	2	7	
SUBTOTAL					562	17	562	5	17	
ROUNDING					38	3	38	5	8	
TOTAL					600	20	600	10	25	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-1	1-2.5	2.5-10				
							m^2	m^3	m^2	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
							654.10	613.10	649.31	
SITE	STATION	STATION	POS.	PERCENT GRADE			EROS. MATT.	STONE FILL TYP. I	GEOT. UNDER STONE FILL	
				0-1	1-2.5	2.5-10				
							m^2	m^3	m^2	

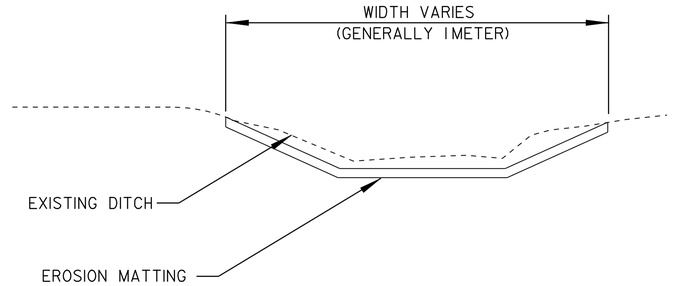

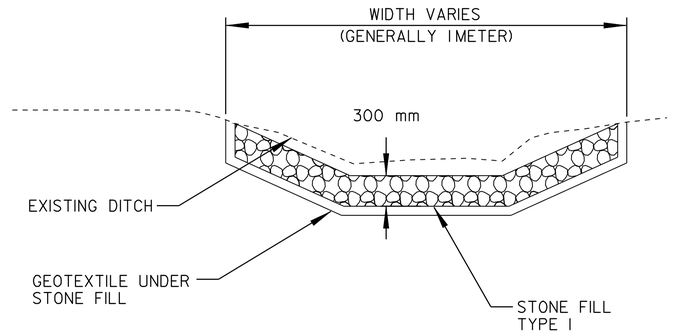

DITCH DETAILS

NOT TO SCALE

NOTES:

1. PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. AN ESTIMATED QUANTITY OF EROSION MATTING AND STONE FILL TYPE I HAS BEEN INCLUDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2 AND 5 PERCENT AND STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 5 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

DITCH CLEANING DETAIL SHEET

PROJECT: FAYSTON - WAITSFIELD

PROJECT NO.: STP 2406(I)S

DESIGN FILE NAME: pave/00b058/00b058.dgn
IPARM FILE NAME: 00b058dtl.i
SURVEYED BY: J. REDMOND
SQUAD LEADER: J. REDMOND
PLOT DATE: 23-MAY-2008 12:54
SURVEY DATE: 7/05
DRAWN BY: J. REDMOND
SHEET: 11 OF 54