

LIST OF TOWN/STATE HIGHWAYS FOR CONSTRUCTION SIGNS


| TOWN/STATE HIGHWAY NAME | ROAD WORK AHEAD (RWA) | END ROAD WORK (ERW) | ROAD WORK 500' (RW500) | SIDE ROAD WORK AHEAD (SRWA) | SIDE ROAD WORK 500' (SRW500) | ROAD WORK NEXT 1/2 MILES (RWN) | PORTABLE CHANGEABLE SIGN (PCS) |
|-------------------------|-----------------------|---------------------|------------------------|-----------------------------|------------------------------|--------------------------------|--------------------------------|
| NEWFANE | | | | | | | |
| VT 30 BEGIN PROJECT | 2 | 1 | 2 | | | 1 | 1 |
| TH 45 BROWNS RD | 1 | 1 | | | | | |
| TH 18 BACK ST | 1 | 1 | | | | | |
| TH 18 BACK ST | 1 | 1 | | | | | |
| TH 21 BRUCE BROOK RD | 1 | 1 | | | | | |
| TH 76 LOOP RD | 1 | 1 | | | | | |
| TH 56 JAIL ST | 1 | 1 | | | | | |
| TH 1 WEST ST | 1 | 1 | | | | | |
| TH 56 JAIL ST | 1 | 1 | | | | | |
| TH 16 CEMETERY HILL RD | 1 | 1 | | | | | |
| TH 1 COURT ST | 1 | 1 | | | | | |
| TH 14 CROSS ST | 1 | 1 | | | | | |
| TH 4 RADWAY HILL RD | 1 | 1 | | | | | |
| TH 15 UPPER RIVER RD | 1 | 1 | | | | | |
| TOWNSHEND | | | | | | | |
| TH 4 STATE FOREST | 1 | 1 | | | | | |
| TH 32 ELLEN WARE RD | 1 | 1 | | | | | |
| TH 55 RIVERDALE RD | 1 | 1 | | | | | |
| TH 32 PLUMB RD | 1 | 1 | | | | | |
| TH 70 SAW DUST ALLEY | 1 | 1 | | | | | |
| TH 25 EAST HILL RD | 1 | 1 | | | | | |
| TH 35 DEPOT RD | 1 | 1 | | | | | |
| TH 1 GRAFTON RD | 1 | 1 | | | | | |
| TH 1 GRAFTON RD | 1 | 1 | | | | | |
| TH 53 COMMON RD | 1 | 1 | | | | | |
| TH 54 OAKWOOD CEMETERY | 1 | 1 | | | | | |
| TH 48 STEPHENSON CURVE | 1 | 1 | | | | | |
| TH 48 STEPHENSON CURVE | 1 | 1 | | | | | |
| TH 22 WINSLOW DR | 1 | 1 | | | | | |
| TH 23 STRATTON DR | 1 | 1 | | | | | |
| TH 51 FAUREAU'S CORNER | 1 | 1 | | | | | |
| TH 49 ISLAND RD | 1 | 1 | | | | | |
| TH 7 BACK WINDHAM RD | 1 | 1 | | | | | |
| TH 3 WINDHAM HILL RD | 1 | 1 | | | | | |
| TH 60 WARDEN RD | 1 | 1 | | | | | |
| VT 30 END PROJECT | 2 | 1 | 2 | | | 1 | 1 |
| TOTAL | 37 | 35 | 4 | 0 | 0 | 2 | 2 |

NOTES:

1. THE CONTRACTOR SHALL SUBMIT A TRAFFIC CONTROL PLAN FOR APPROVAL PRIOR TO THE START OF CONSTRUCTION. THE COST OF PREPARING THIS PLAN (AND MAKING CHANGES IF NECESSARY) SHALL BE CONSIDERED INCIDENTAL TO ITEM 641.10, TRAFFIC CONTROL.
2. THE CONTRACTOR SHALL POSITION PORTABLE CHANGEABLE MESSAGE BOARDS WARNING MOTORISTS OF THE EXPECTED ROADWAY CONDITIONS AHEAD. THE MESSAGE TO BE DISPLAYED SHALL BE SUBMITTED TO THE RESIDENT ENGINEER IN ADVANCE FOR APPROVAL. THE COST OF PROVIDING THESE MESSAGE BOARDS SHALL BE PAID UNDER 641.15, PORTABLE CHANGEABLE MESSAGE SIGN.
3. THE BID PRICE FOR TRAFFIC CONTROL, ITEM 641.10, SHALL INCLUDE ALL OF THE FOLLOWING, AS NEEDED: APPROACH AND ON-PROJECT CONSTRUCTION SIGNING. PORTABLE FLASHING ARROW BOARDS, BARRIERS, BARRELS, CONES, BARRICADES, TEMPORARY REGULATORY AND WARNING SIGNS, AND POSTS AS DETAILED IN VTRANS STANDARDS. ALL ADJUSTING, RELOCATING AND REMOVING OF THESE DEVICES AS DIRECTED BY THE RESIDENT ENGINEER SHALL ALSO BE INCLUDED.
4. THE MUTCD 2003 SHALL BE THE STANDARD FOR ALL TRAFFIC CONTROL DEVICES. EXISTING SIGNS AND MARKINGS SHALL BE VALID UNTIL SUCH TIME AS THEY ARE REPLACED OR RECONSTRUCTED. WHEN NEW TRAFFIC DEVICES ARE ERECTED OR PLACED, OR EXISTING TRAFFIC CONTROL DEVICES ARE REPLACED OR REPAIRED, THE EQUIPMENT, DESIGN, METHOD OF INSTALLATION, PLACEMENT OR REPAIR SHALL CONFORM WITH SUCH STANDARDS.
5. NO CONSTRUCTION SIGNS SHALL BE INSTALLED AS TO INTERFERE OR OBSTRUCT THE VIEW OF EXISTING TRAFFIC CONTROL DEVICES, STOPPING SIGHT DISTANCE, AND CORNER SIGHT DISTANCE FROM DRIVES AND TOWN HIGHWAYS.
6. THE CONTRACTOR SHALL INCLUDE A CONSTRUCTION SIGN PACKAGE FOR EXPECTED LANE CLOSURES AND WORK ZONE SPEED REDUCTIONS IN COMPLIANCE WITH STANDARD E-103. PAYMENT FOR PROVIDING THIS PACKAGE SHALL BE INCIDENTAL TO ITEM 641.10, TRAFFIC CONTROL.
7. ON VTRANS STANDARD E-103, SIGN W4-2 MAY BE REPLACED WITH W9-2.
8. WHEN DIRECTED BY THE RESIDENT ENGINEER, "NO OUTLET" SIDE ROADS WILL NOT REQUIRE CONSTRUCTION SIGNING.
9. SEE STD E-100, E-100A AND E-103 FOR SIGN PLACEMENT.
10. THE CONTRACTOR SHALL PROVIDE ADEQUATE TEMPORARY PEDESTRIAN FACILITIES WHEN WORKING ON SIDEWALK RAMPS.



W4-2

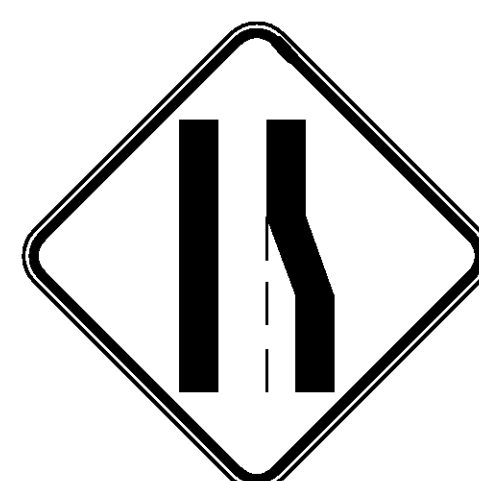

W9-2



NOT TO SCALE

TEMPORARY TRAFFIC CONTROL PLAN

| | |
|------------------|-------------------|
| PROJECT NAME: | NEWFANE-TOWNSHEND |
| PROJECT NUMBER: | STP 2401 (1) |
| FILE NAME: | 01b036.dgn |
| PROJECT LEADER: | CRB |
| DESIGNED BY: | JBZ |
| IPARM FILE NAME: | 01b036_32.1 |
| PLOT DATE: | 04-FEB-2010 |
| DRAWN BY: | JBZ |
| CHECKED BY: | BDB |
| SHEET | 32 OF 32 |