

646.40 DURABLE 100 mm WHITE LINE
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

SALISBURY:
STA. 2+900.0 - STA. 3+440.0 LT & RT

646.60 TEMPORARY 100 mm WHITE LINE
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

SALISBURY:
STA. 2+900.0 - STA. 3+440.0 LT & RT

646.41 DURABLE 100 mm YELLOW LINE
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

SALISBURY:	LT	RT
STA. 2+900.0 - STA. 2+912.9	S	S
STA. 2+912.9 - STA. 3+098.0	S	D
STA. 3+098.0 - STA. 3+186.5	D	S
STA. 3+186.5 - STA. 3+323.3	S	S
STA. 3+323.3 - STA. 3+440.0	S	S
STA. 3+337.780	DOUBLE SOLID LT, T-23	

646.61 TEMPORARY 100 mm YELLOW LINE
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

SALISBURY:	LT	RT
STA. 2+900.0 - STA. 2+912.9	S	S
STA. 2+912.9 - STA. 3+098.0	S	D
STA. 3+098.0 - STA. 3+186.5	D	S
STA. 3+186.5 - STA. 3+323.3	S	S
STA. 3+323.3 - STA. 3+440.0	S	S
STA. 3+337.780	DOUBLE SOLID LT, T-23	

646.46 DURABLE 600 mm STOP BAR

SALISBURY:
STA. 3+337.780 LT, T-23

646.66 TEMPORARY 600 mm STOP BAR

SALISBURY:
STA. 3+337.780 LT, T-23

646.50 DURABLE LETTER OR SYMBOL

SALISBURY:
STA. 3+337.780 LT, T-23, "S,T,O,P" (4 EA)

646.70 TEMPORARY LETTER OR SYMBOL


SALISBURY:
STA. 3+337.780 LT, T-23, "S,T,O,P" (4 EA)

675.50 REMOVING SIGNS

AS SHOWN - 9

675.60 ERECTING SALVAGED SIGNS

AS SHOWN - 1

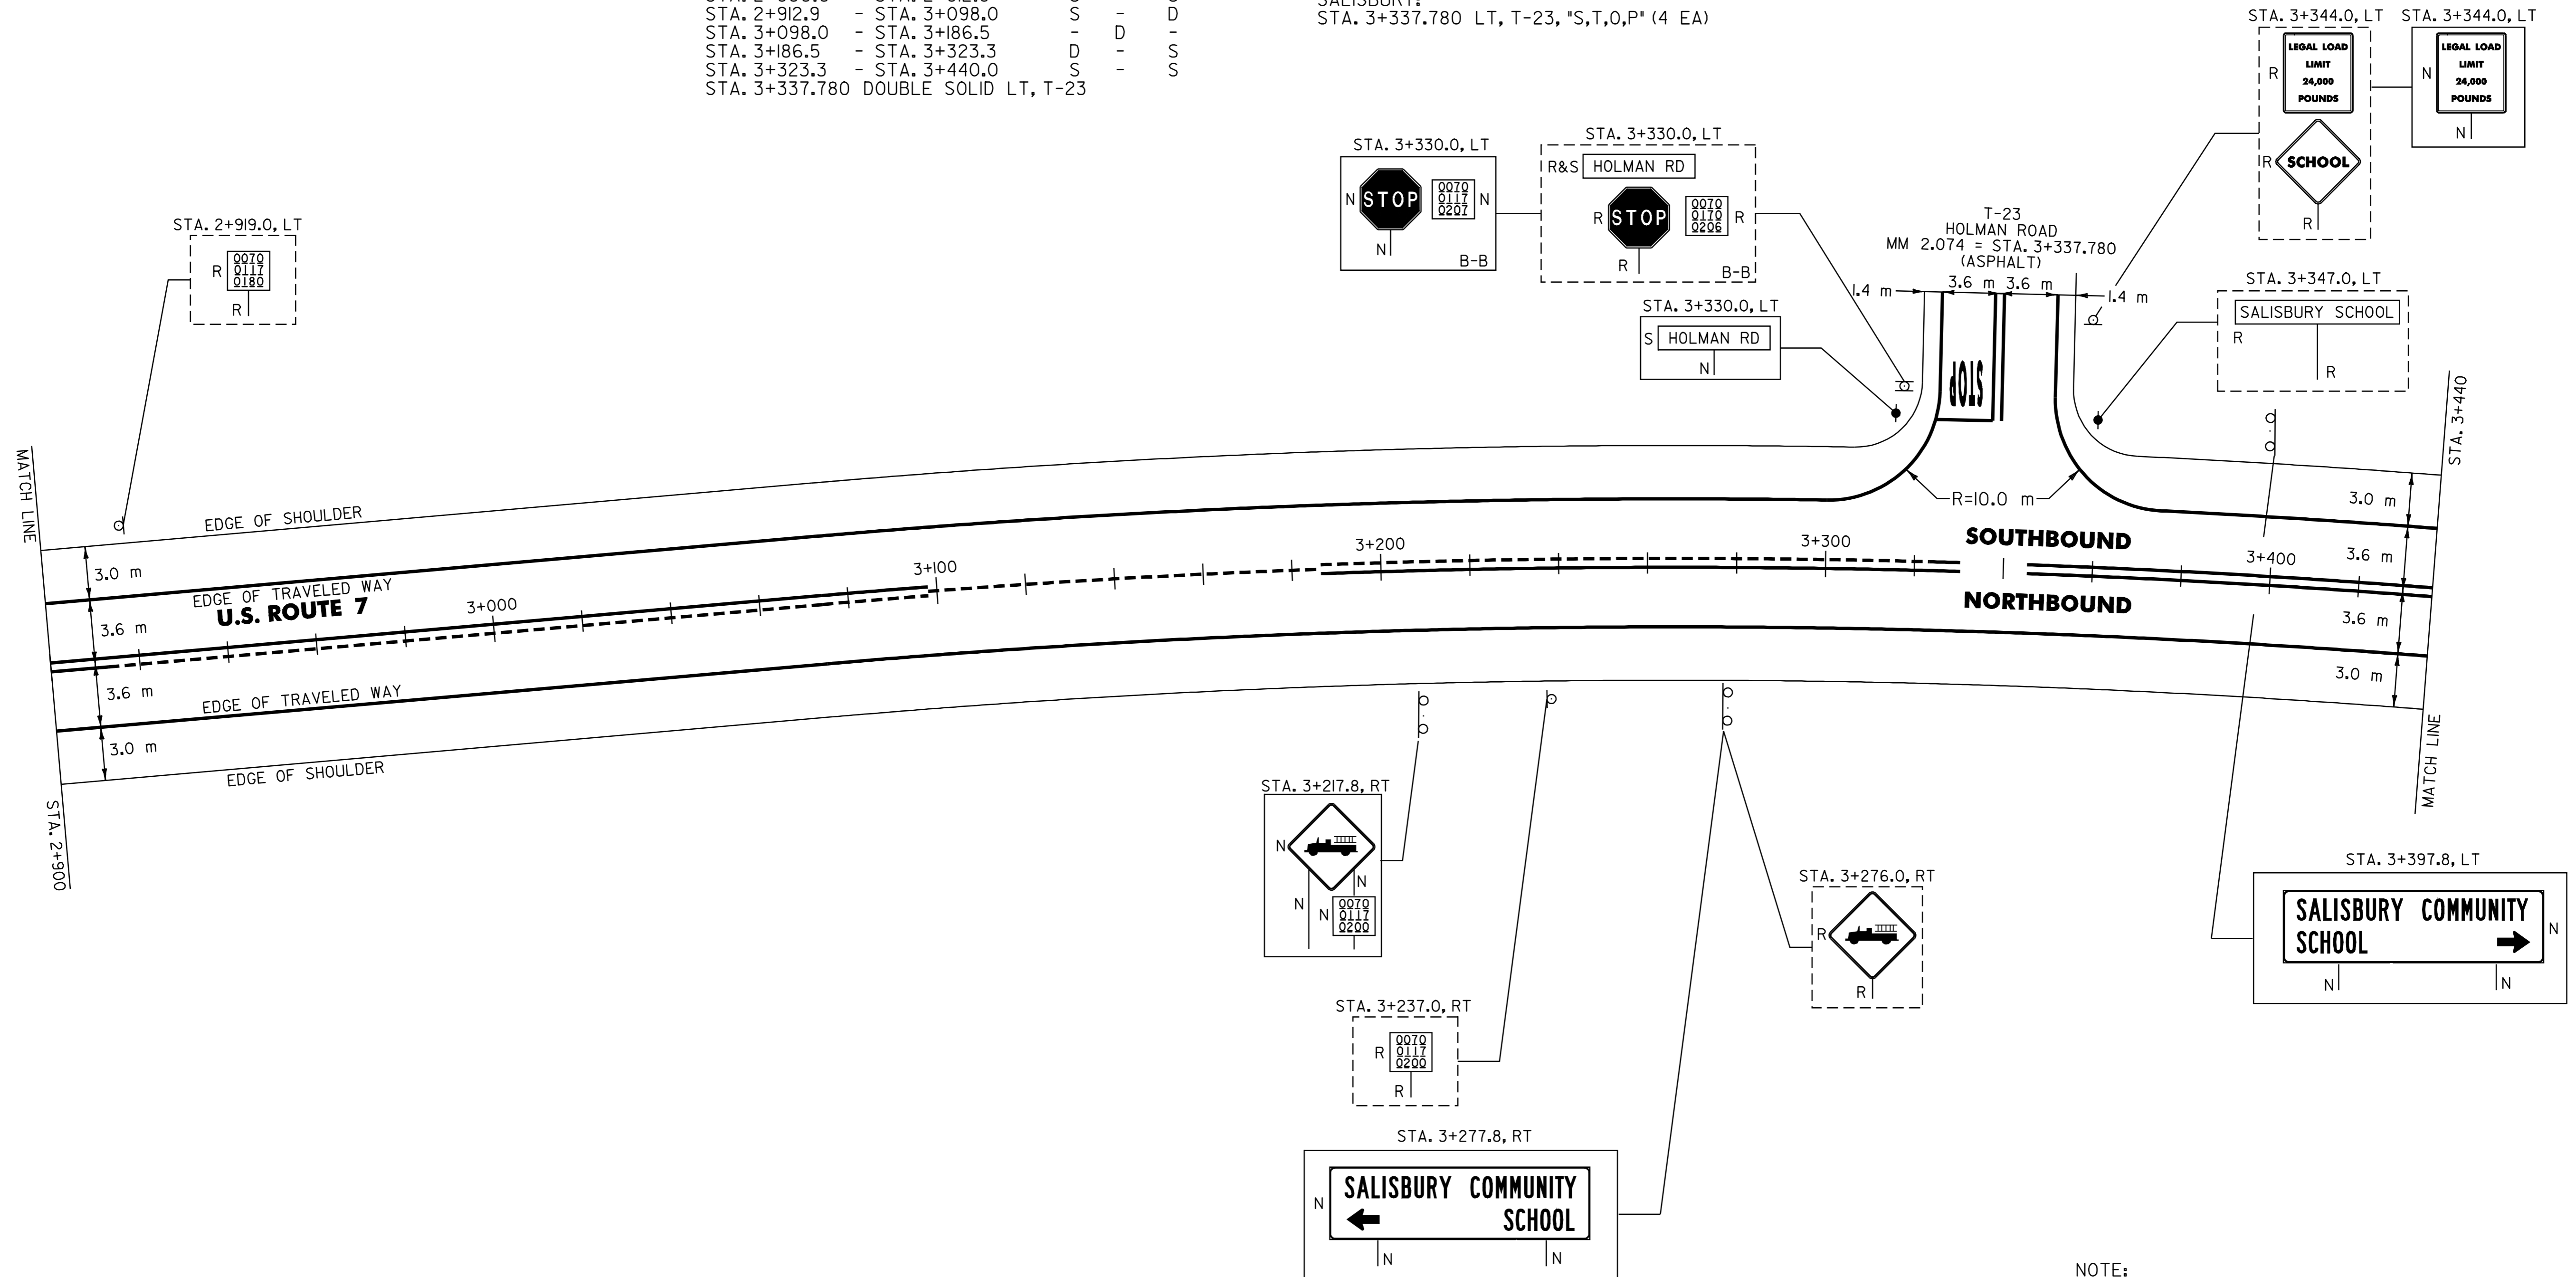

NOTE:
1. PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 8 m BACK FROM U.S. ROUTE 7 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.

DATUM	
VERTICAL	N/A
HORIZONTAL	N/A

SIGN LEGEND
R= REMOVE
S= SALVAGE
N= NEW
RET= RETAIN
B-B= BACK TO BACK
EXISTING= _____
NEW= _____

<h2>PAVING PROJECT LAYOUT</h2> <h3># 3</h3>	SURVEYED BY	N/A	DATE	N/A
	DRAWN BY	C.A.K.	DATE	2/02
	SQUAD LEADER	D.E.G.		
	DESIGN FILE NO.	pave/01b018/pb018.dgn		
	IPARM FILE	pb018p03.i	DATE PLOTTED	10-JUL-2006 13:
PROJ. NAME	SALISBURY - MIDDLEBURY			
PROJ. NO.	NH_23(11)S			
SHEET	12	OF	67	SHEETS