

646.40 DURABLE 100 mm WHITE LINE  
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

SALISBURY:  
STA. 4+520.0 - STA. 5+060.0 LT & RT

646.60 TEMPORARY 100 mm WHITE LINE  
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

SALISBURY:  
STA. 4+520.0 - STA. 5+060.0 LT & RT


646.41 DURABLE 100 mm YELLOW LINE  
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

SALISBURY: LT C RT  
STA. 4+520.0 - STA. 4+894.0 S - S  
STA. 4+894.0 - STA. 5+060.0 S - D

646.61 TEMPORARY 100 mm YELLOW LINE  
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

SALISBURY: LT C RT  
STA. 4+520.0 - STA. 4+894.0 S - S  
STA. 4+894.0 - STA. 5+060.0 S - D

675.50 REMOVING SIGNS  
AS SHOWN - 5

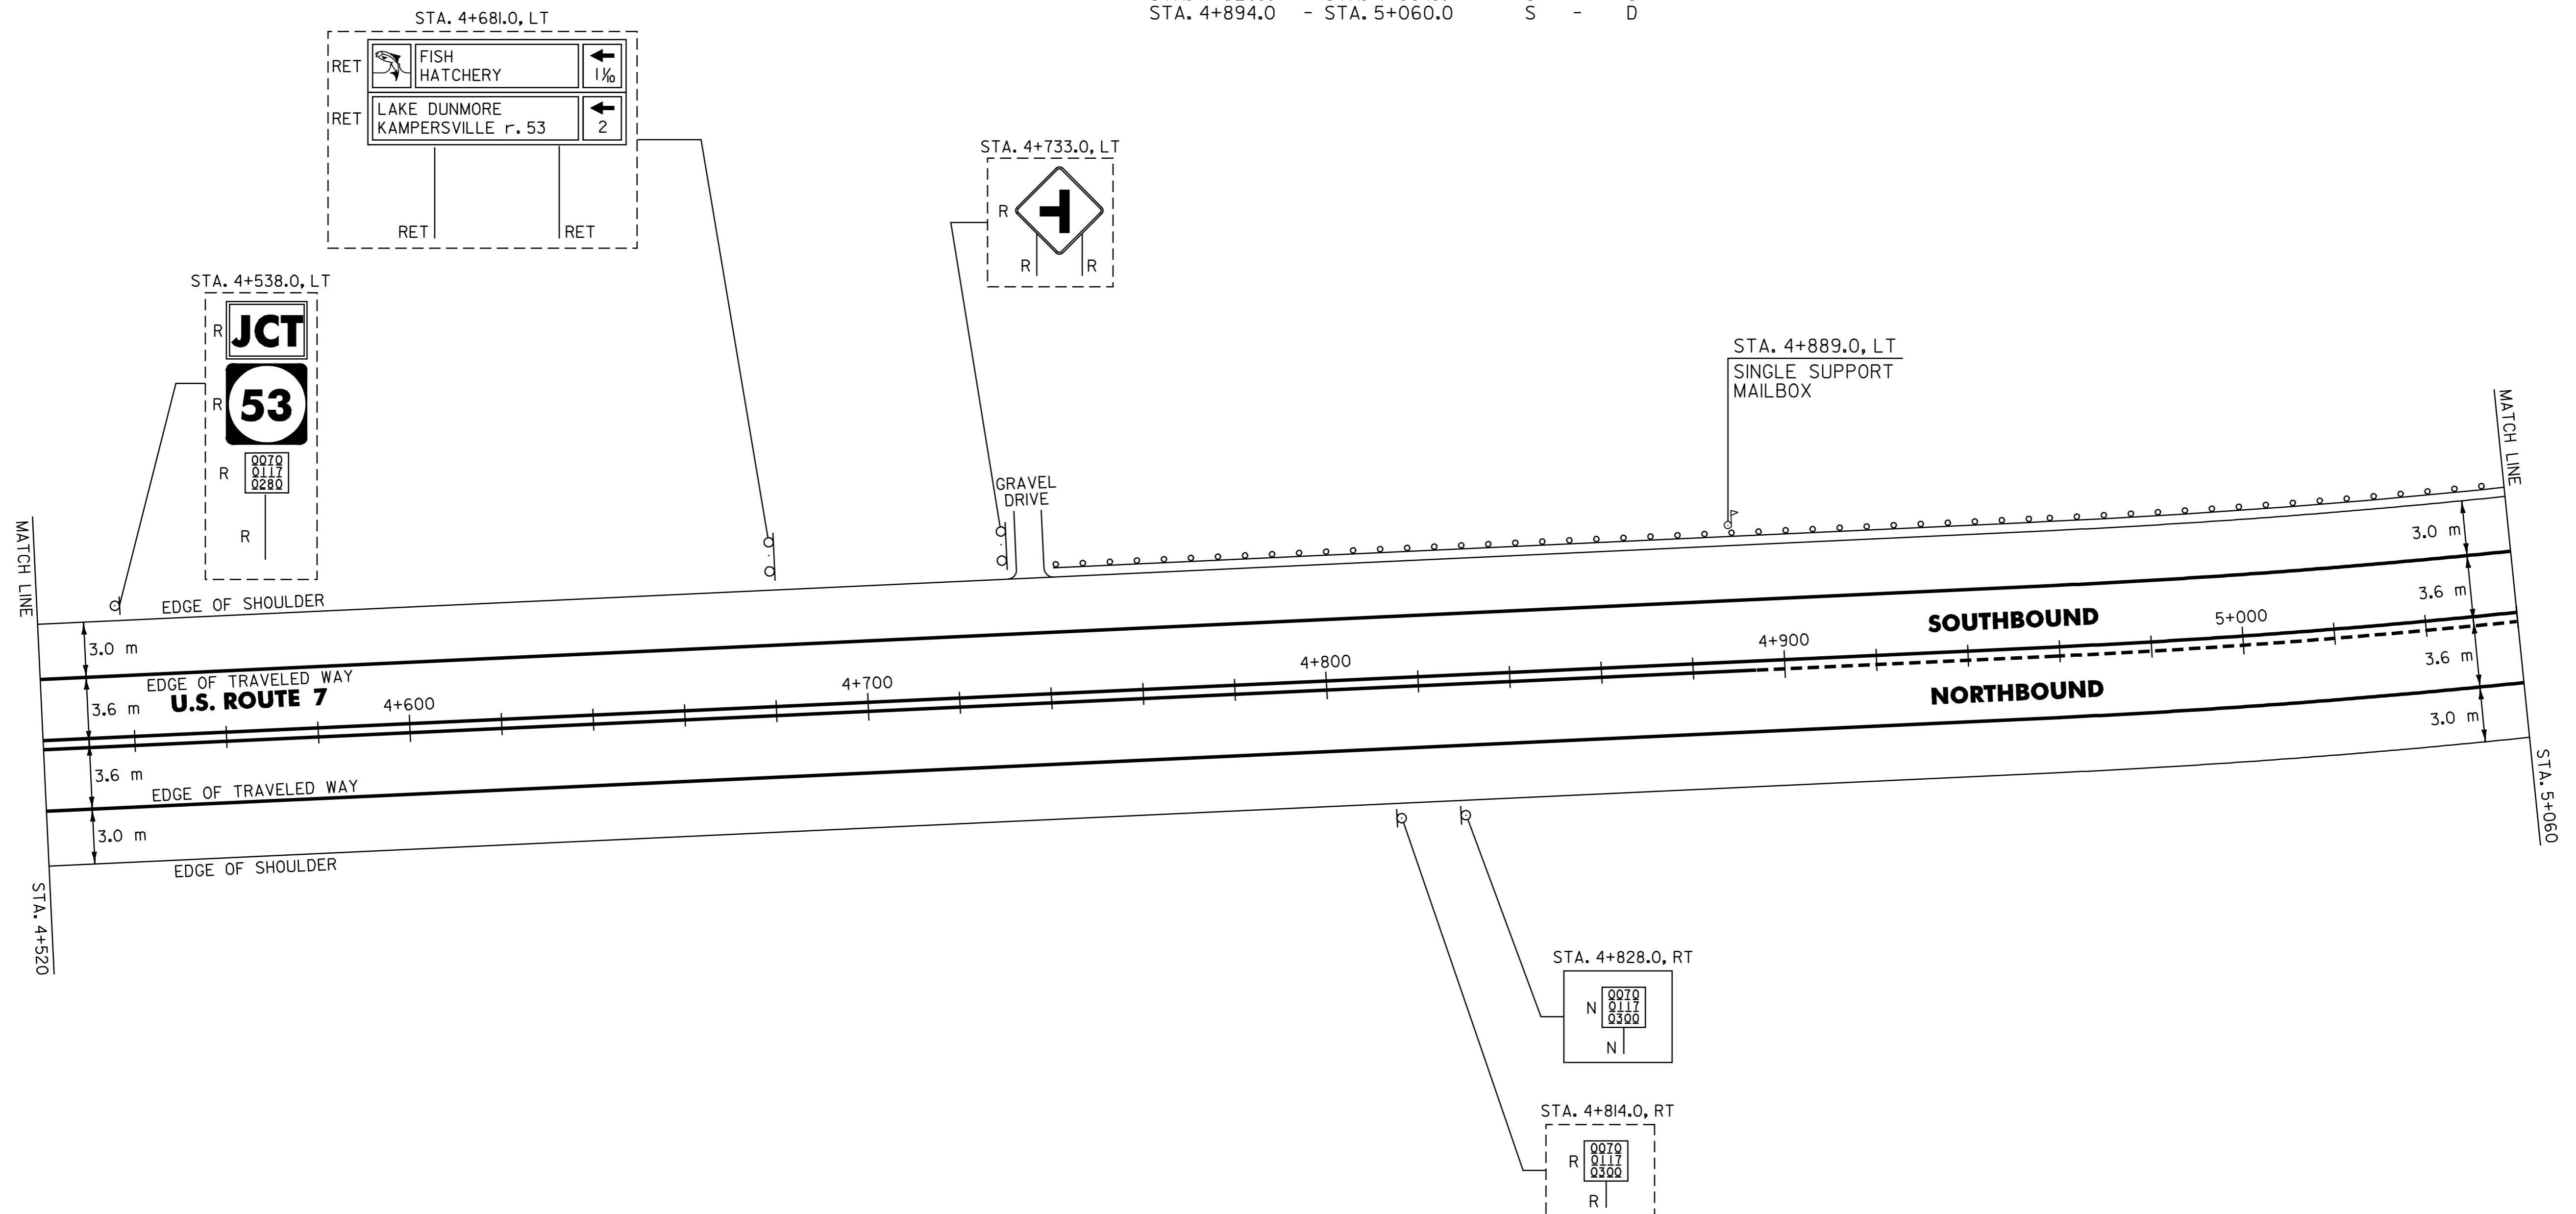

621.20 STEEL BEAM GUARDRAIL

SALISBURY:  
STA. 4+754.4 - STA. 5+060.0 LT (305.6 m)  
STA. 5+069.8 LT (315.4 m)

621.505 MANUFACTURED TERMINAL SECTION (FLARED)

SALISBURY:  
STA. 4+743.0 - STA. 4+754.4 LT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL

SALISBURY:  
STA. 4+743.0 - STA. 5+060.0 LT (317.0 m)

617.10 RELOCATE MAILBOX, SINGLE SUPPORT

SALISBURY:  
STA. 4+889.0 LT

DATUM	
VERTICAL	N/A
HORIZONTAL	N/A

SIGN LEGEND  
R= REMOVE  
S= SALVAGE  
N= NEW  
RET= RETAIN  
B-B= BACK TO BACK  
EXISTING= \_\_\_\_\_  
NEW= \_\_\_\_\_

<h2>PAVING PROJECT LAYOUT</h2> <h3># 6</h3>	SURVEYED BY	N/A	DATE	N/A
	DRAWN BY	C.A.K.	DATE	2/02
	SQUAD LEADER	D.E.G.		
	DESIGN FILE NO.	pgve/01b018/pb018.dgn		
	IPARM FILE	pb018p06.i	DATE PLOTTED	16-JUL-2006 13:30
PROJ. NAME	SALISBURY - MIDDLEBURY			
PROJ. NO.	NH_231111S			
SHEET	15	OF	67	SHEETS