

646.40 DURABLE 100 mm WHITE LINE  
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

MIDDLEBURY:  
STA. 2+640.0 - STA. 3+180.0 LT & RT

646.60 TEMPORARY 100 mm WHITE LINE  
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

MIDDLEBURY:  
STA. 2+640.0 - STA. 3+180.0 LT & RT

646.41 DURABLE 100 mm YELLOW LINE  
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

MIDDLEBURY: LT Q RT  
STA. 2+640.0 - STA. 2+752.0 D - S S  
STA. 2+752.0 - STA. 2+993.4 S - S S  
STA. 2+993.4 - STA. 3+180.0 S - S D  
STA. 2+766.462 DOUBLE SOLID RT, T-24

646.61 TEMPORARY 100 mm YELLOW LINE  
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

MIDDLEBURY: LT Q RT  
STA. 2+640.0 - STA. 2+752.0 D - S S  
STA. 2+752.0 - STA. 2+993.4 S - S S  
STA. 2+993.4 - STA. 3+180.0 S - S D  
STA. 2+766.462 DOUBLE SOLID RT, T-24

646.46 DURABLE 600 mm STOP BAR

MIDDLEBURY:  
STA. 2+766.462 RT, T-24

646.66 TEMPORARY 600 mm STOP BAR

MIDDLEBURY:  
STA. 2+766.462 RT, T-24

675.50 REMOVING SIGNS

AS SHOWN - 7

675.60 ERECTING SALVAGED SIGNS


AS SHOWN - 1

646.50 DURABLE LETTER OR SYMBOL

MIDDLEBURY:  
STA. 2+766.462 RT, T-24, 'S,T,O,P' (4 EA)

646.70 TEMPORARY LETTER OR SYMBOL

MIDDLEBURY:  
STA. 2+766.462 RT, T-24, 'S,T,O,P' (4 EA)

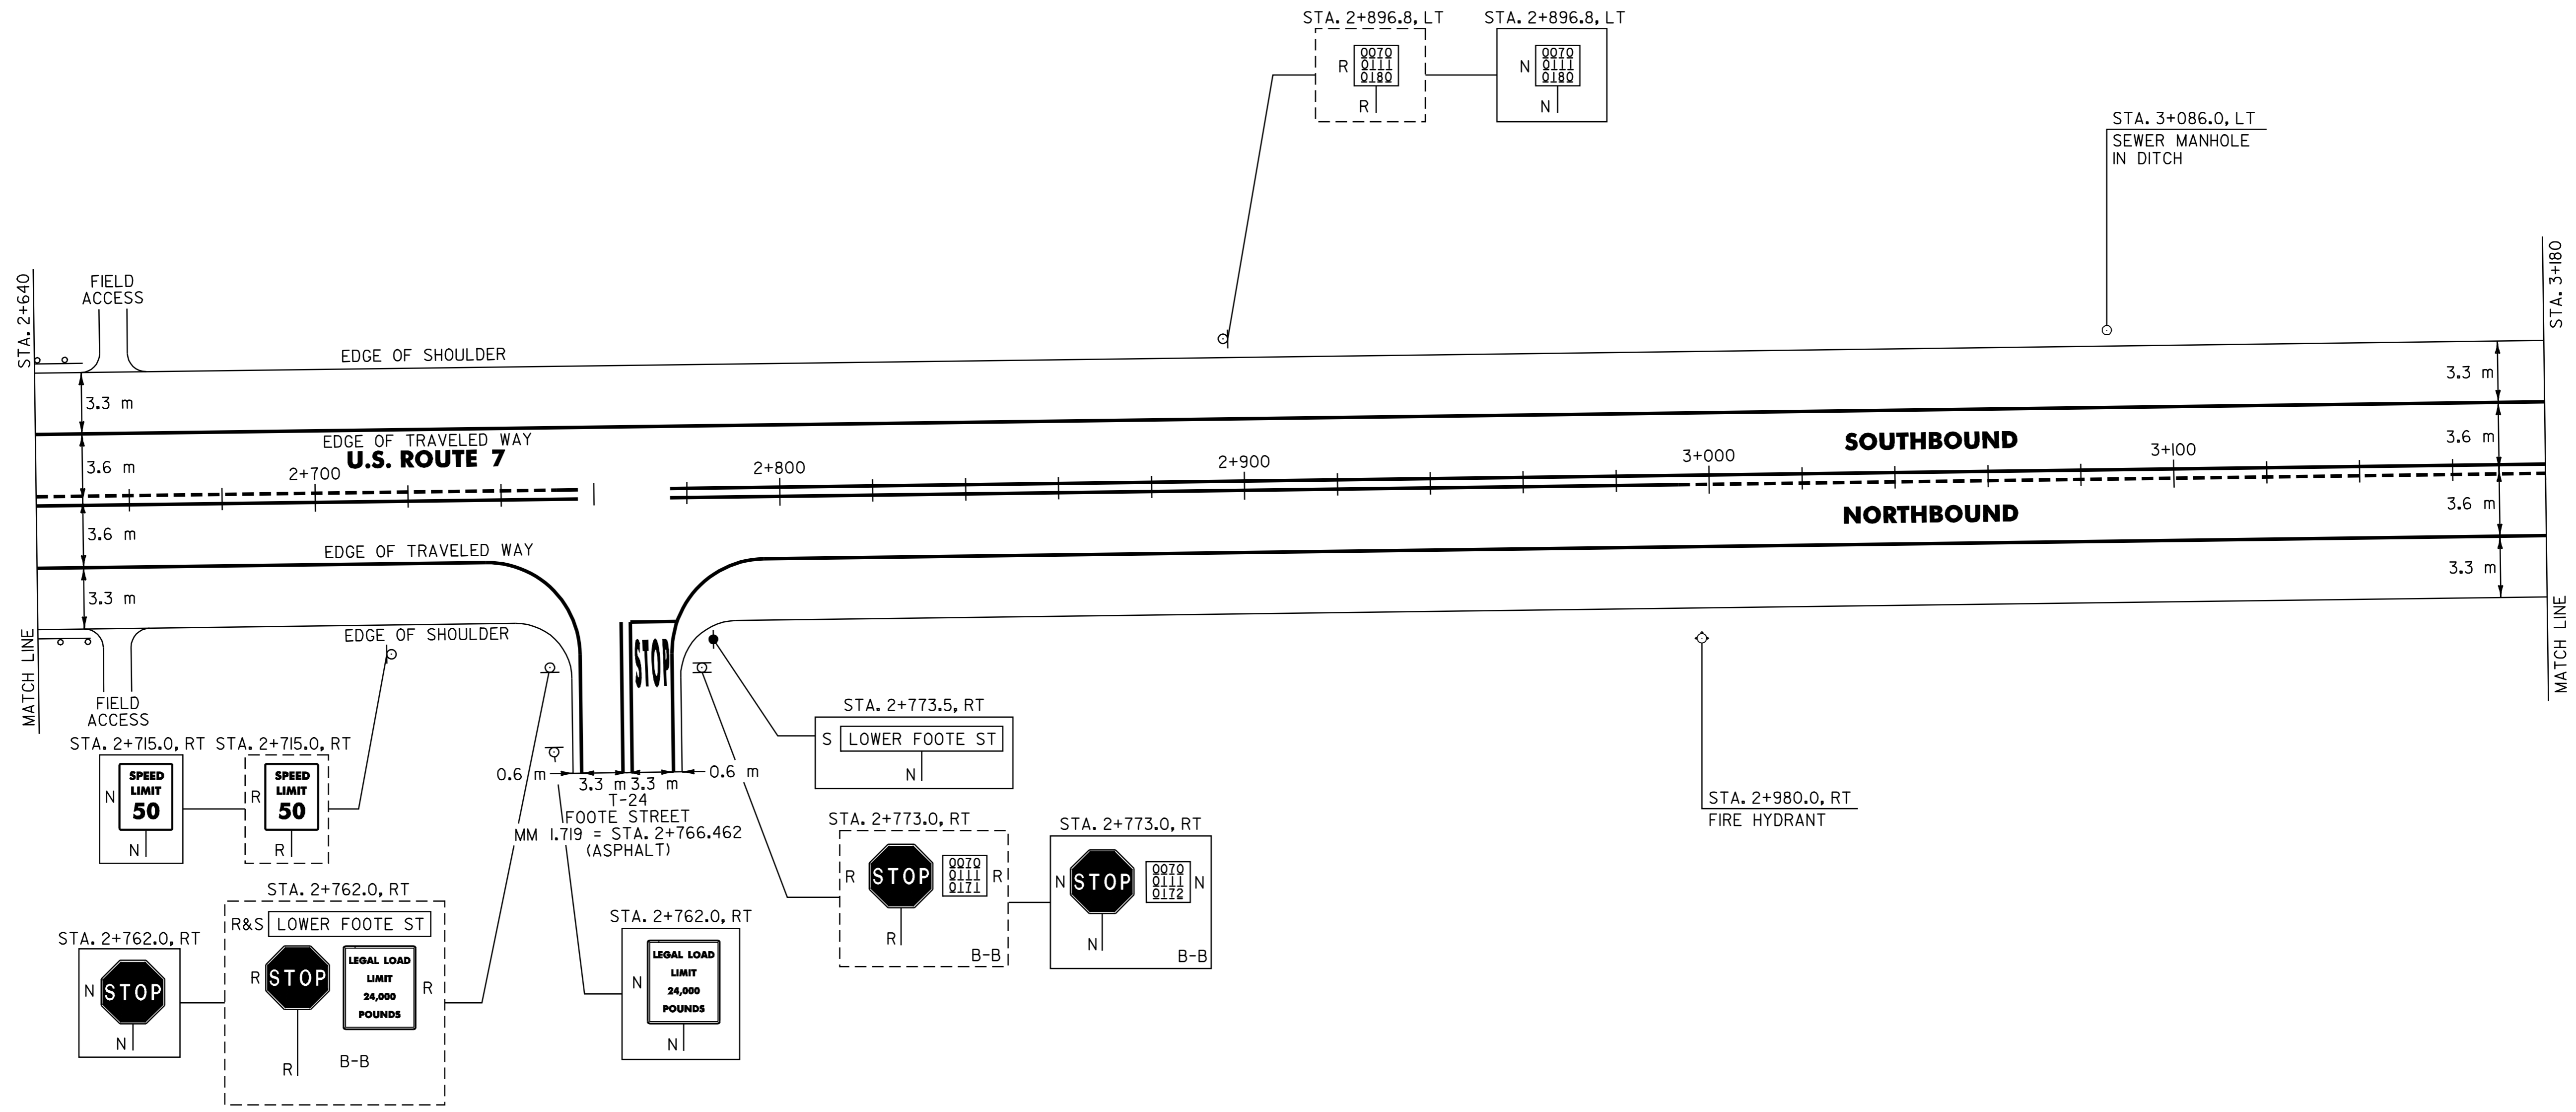

NOTE:  
I. PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 8 m BACK FROM U.S. ROUTE 7 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.

DATUM	
VERTICAL	N/A
HORIZONTAL	N/A

SIGN LEGEND  
R= REMOVE  
S= SALVAGE  
N= NEW  
RET= RETAIN  
B-B= BACK TO BACK  
EXISTING= \_\_\_\_\_  
NEW= \_\_\_\_\_

**PAVING PROJECT LAYOUT # 18**

SURVEYED BY	N/A	DATE	N/A
DRAWN BY	C.A.K.	DATE	2/02
SQUAD LEADER	D.E.G.		
DESIGN FILE NO.	pave/01b018/pb018.dgn		
IPARM FILE	pb018.i	DATE PLOTTED	10 JUL-2006 13:30
PROJ. NAME	SALISBURY - MIDDLEBURY		
PROJ. NO.	NH_231111		
SHEET	27	OF	67 SHEETS