VTrans Metric

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			654.10	613.10	649.31	
SITE	STATION	STATION	POS.	0-2½		>2½	EROS. MATT.	STONE FILL, TYPE I	GEOT. UNDER STONE FILL	
VT. ROUTE 103							m^2	m^3	m^2	
LUDLOW:										
1	4+828.0	5+796.0	LT	968			968			
2	5+793.6		RT	1			1			
3	6+560.0	7+725.0	LT			1165		350	1165	
4	8+046.0	9+318.1	LT			1288		390	1288	
MT. HOLLY:										
5	0+482.0	1+288.0	LT	806			806			
6	2+150.0	2+200.0	RT			50		15	50	
7	2+400.0	2+500.0	LT			100		30	100	
8	2+400.0	2+500.0	RT			100		30	100	
9	2+713.0	2+860.0	LT			147		45	147	
10	3+200.0	3+755.0	LT			555		165	555	
11	9+012.0	9+254.0	RT	242			242			
12	9+575.0		LT	1			1			
13	10+203.0	10+332.0	RT			129		40	129	
14	11+024.0	11+652.0	RT			628		185	628	
15	11+828.0	12+231.0	RT	403			403			
16	11+844.0		LT	1			1			
17	11+973.0	12+215.0	LT	242			242			
18	12+070.0		LT&RT	2			2			
SUBTOTAL							2665	1250	4162	
ROUNDING									3	
TOTAL							2665	1250	4165	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			654.10	613.10	649.31	
SITE	STATION	STATION	POS.	0-2	2-5	>5	EROS. MATT.	STONE FILL, TYPE I	GEOT. UNDER STONE FILL	
							m^2	m^3	m^2	

LOCATION				METERS OF DITCHING			MISC. ITEMS			REMARKS
				PERCENT GRADE			654.10	613.10	649.31	
SITE	STATION	STATION	POS.	0-2	2-5	>5	EROS. MATT.	STONE FILL, TYPE I	GEOT. UNDER STONE FILL	
							m^2	m^3	m^2	

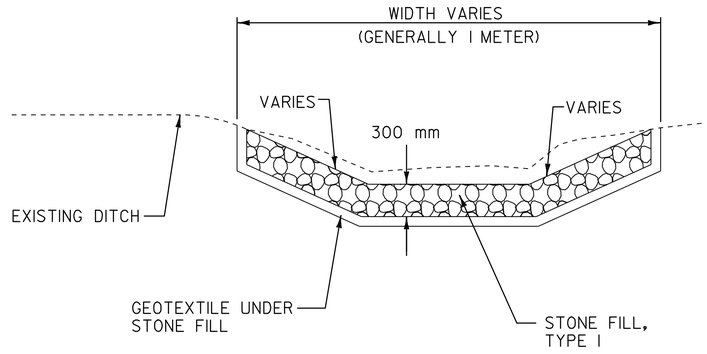

DITCH DETAIL

NOT TO SCALE

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGH PROJECT SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. AN ESTIMATED QUANTITY OF EROSION MATTING AND STONE FILL, TYPE I HAS BEEN INCLUDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 0 AND 2.5 PERCENT AND STONE FILL, TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE GREATER THAN 2.5 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

DITCH CLEANING DETAIL SHEET

PROJECT: LUDLOW - MT. HOLLY

PROJECT NO.: NH 2327(1)S

DESIGN FILE NAME: /pave/01b024/pb024.dgn

IPARM FILE NAME: pb024dd.i

PLOT DATE: 10/01

SURVEYED BY: N/A

SURVEY DATE: N/A

SQUAD LEADER: I.P.K.

DRAWN BY: C.A.K.

SHEET: 9 OF 84