

646.40 DURABLE 100 mm WHITE LINE
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

LUDLOW:
STA. 5+000.0 - STA. 5+540.0, LT & RT

646.60 TEMPORARY 100 mm WHITE LINE
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

LUDLOW:
STA. 5+000.0 - STA. 5+540.0, LT & RT


646.41 DURABLE 100 mm YELLOW LINE
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

LUDLOW: LT Q RT
STA. 5+000.0 - STA. 5+130.0 S - S
STA. 5+130.0 - STA. 5+356.0 S - D
STA. 5+356.0 - STA. 5+540.0 - D -

646.61 TEMPORARY 100 mm YELLOW LINE
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

LUDLOW: LT Q RT
STA. 5+000.0 - STA. 5+130.0 S - S
STA. 5+130.0 - STA. 5+356.0 S - D
STA. 5+356.0 - STA. 5+540.0 - D -

675.50 REMOVING SIGNS
AS SHOWN - I

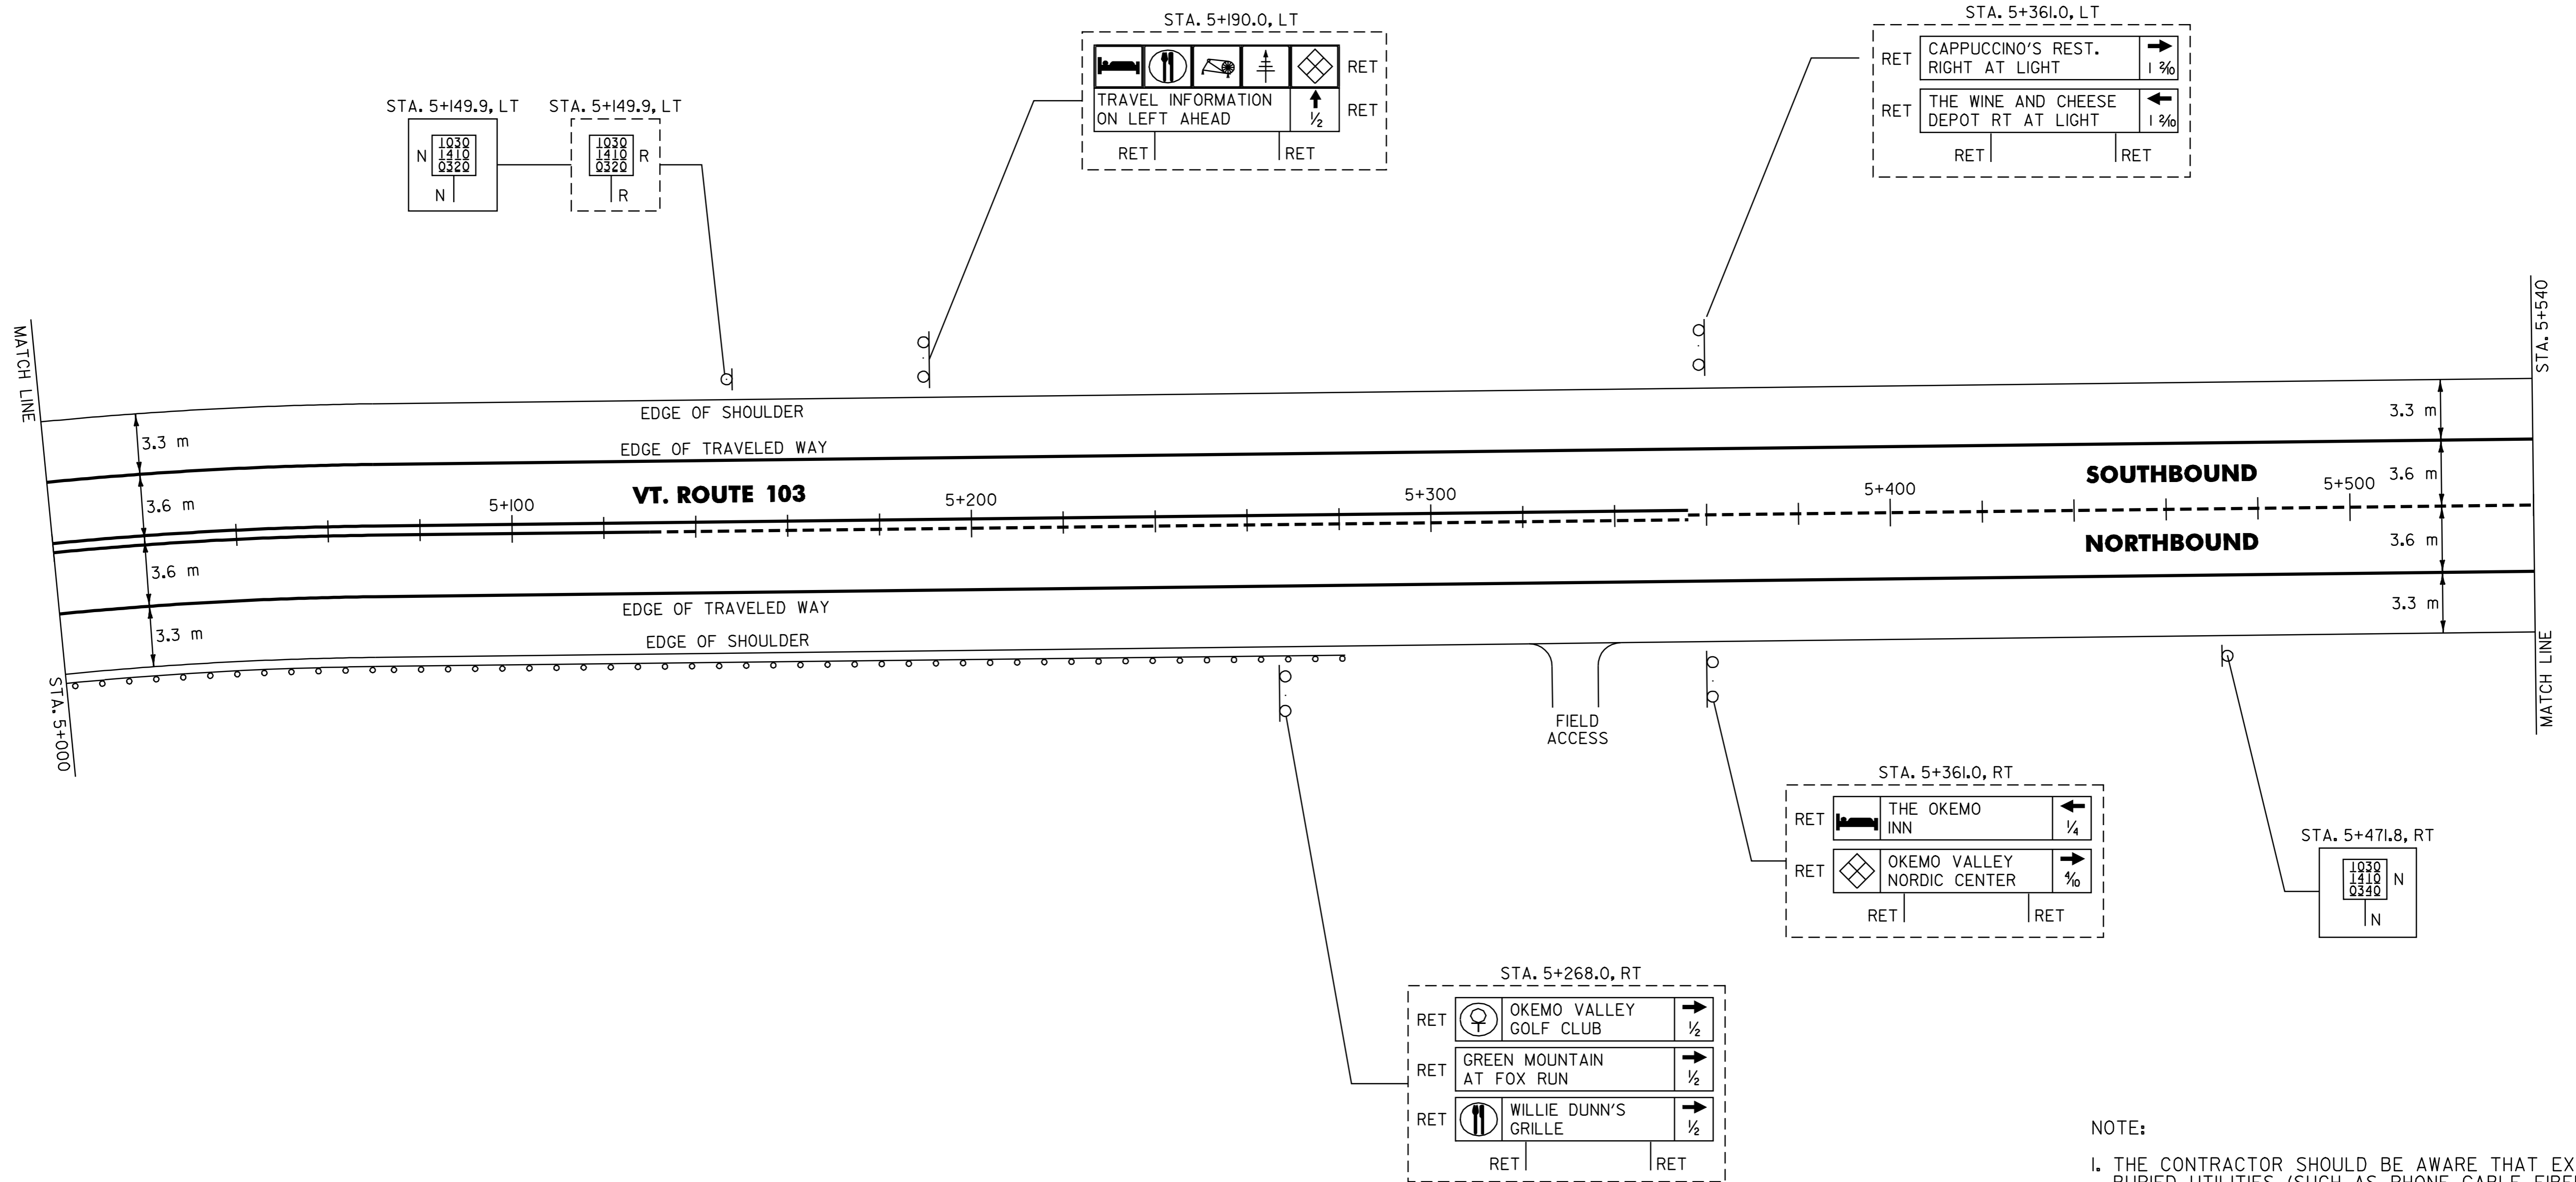

NOTE:
I. THE CONTRACTOR SHOULD BE AWARE THAT EXISTING BURIED UTILITIES (SUCH AS PHONE CABLE, FIBER OPTIC CABLE, SEWER LINES, ETC.) ARE LOCATED ADJACENT TO VT. ROUTE 103 WITHIN THE PROJECT LIMITS. THE CONTRACTOR IS RESPONSIBLE FOR CONTACTING "DIG SAFE" AT 1-888-344-7233 TO DETERMINE THE EXACT LOCATIONS OF THESE UTILITIES PRIOR TO INSTALLING GUARDRAIL, CLEANING DITCHES OR PERFORMING ANY OTHER OPERATIONS THAT MAY DISTURB THE EXISTING SUBSURFACE CONDITIONS.

621.20 STEEL BEAM GUARDRAIL

LUDLOW:
STA. 5+000.0 - STA. 5+271.6 RT (271.6 m)

621.505 MANUFACTURED TERMINAL SECTION (FLARED)

LUDLOW:
STA. 5+271.6 RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL

LUDLOW:
STA. 5+000.0 - STA. 5+282.0 RT (282.0 m)

DATUM
VERTICAL N/A
HORIZONTAL N/A

SIGN LEGEND
R= REMOVE
S= SALVAGE
N= NEW
RET= RETAIN
B-B= BACK TO BACK
EXISTING= _____
NEW= _____

PAVING PROJECT LAYOUT # 2

SURVEYED BY N/A DATE N/A
DRAWN BY C.A.K. DATE _____
SQUAD LEADER T.P.K.
DESIGN FILE NO. pb0241021
IPARM FILE pb0241021 DATE PLOTTED \$DATE\$
PROJ. NAME LUDLOW - MI. HOLLY
PROJ. NO. NH_2321(I)S
SHEET 11 OF 84 SHEETS _____