

TEMPORARY 4" WHITE LINE, PAINT
 DURABLE 4" WHITE LINE, THERMOPLASTIC
 STA 463+00 TO 474+00 SOLID LT
 STA 463+00 TO 474+00 SOLID RT

TEMPORARY 4" YELLOW LINE, PAINT
 DURABLE 4" YELLOW LINE, THERMOPLASTIC
 STA 463+00 TO 464+30 SOLID LT, DASHED RT
 STA 464+30 TO 468+00 DASHED
 STA 468+00 TO 473+80 DASHED LT, SOLID RT
 STA 473+80 TO 474+00 SOLID LT & RT


STEEL BEAM GUARDRAIL, GALVANIZED
 STA 463+00 TO 465+15 LT
 STA 463+00 TO 466+18 RT

MANUFACTURED TERMINAL SECTION, FLARED
 STA 465+15 LT
 STA 466+18 RT

REMOVAL AND DISPOSAL OF GUARDRAIL
 STA 463+00 TO 465+56 LT
 STA 463+00 TO 466+55 RT

REMOVING SIGNS
 AS SHOWN - 1

ERECTING SALVAGED SIGNS
 (NO FED. PART.)
 AS SHOWN (TIS) - 1

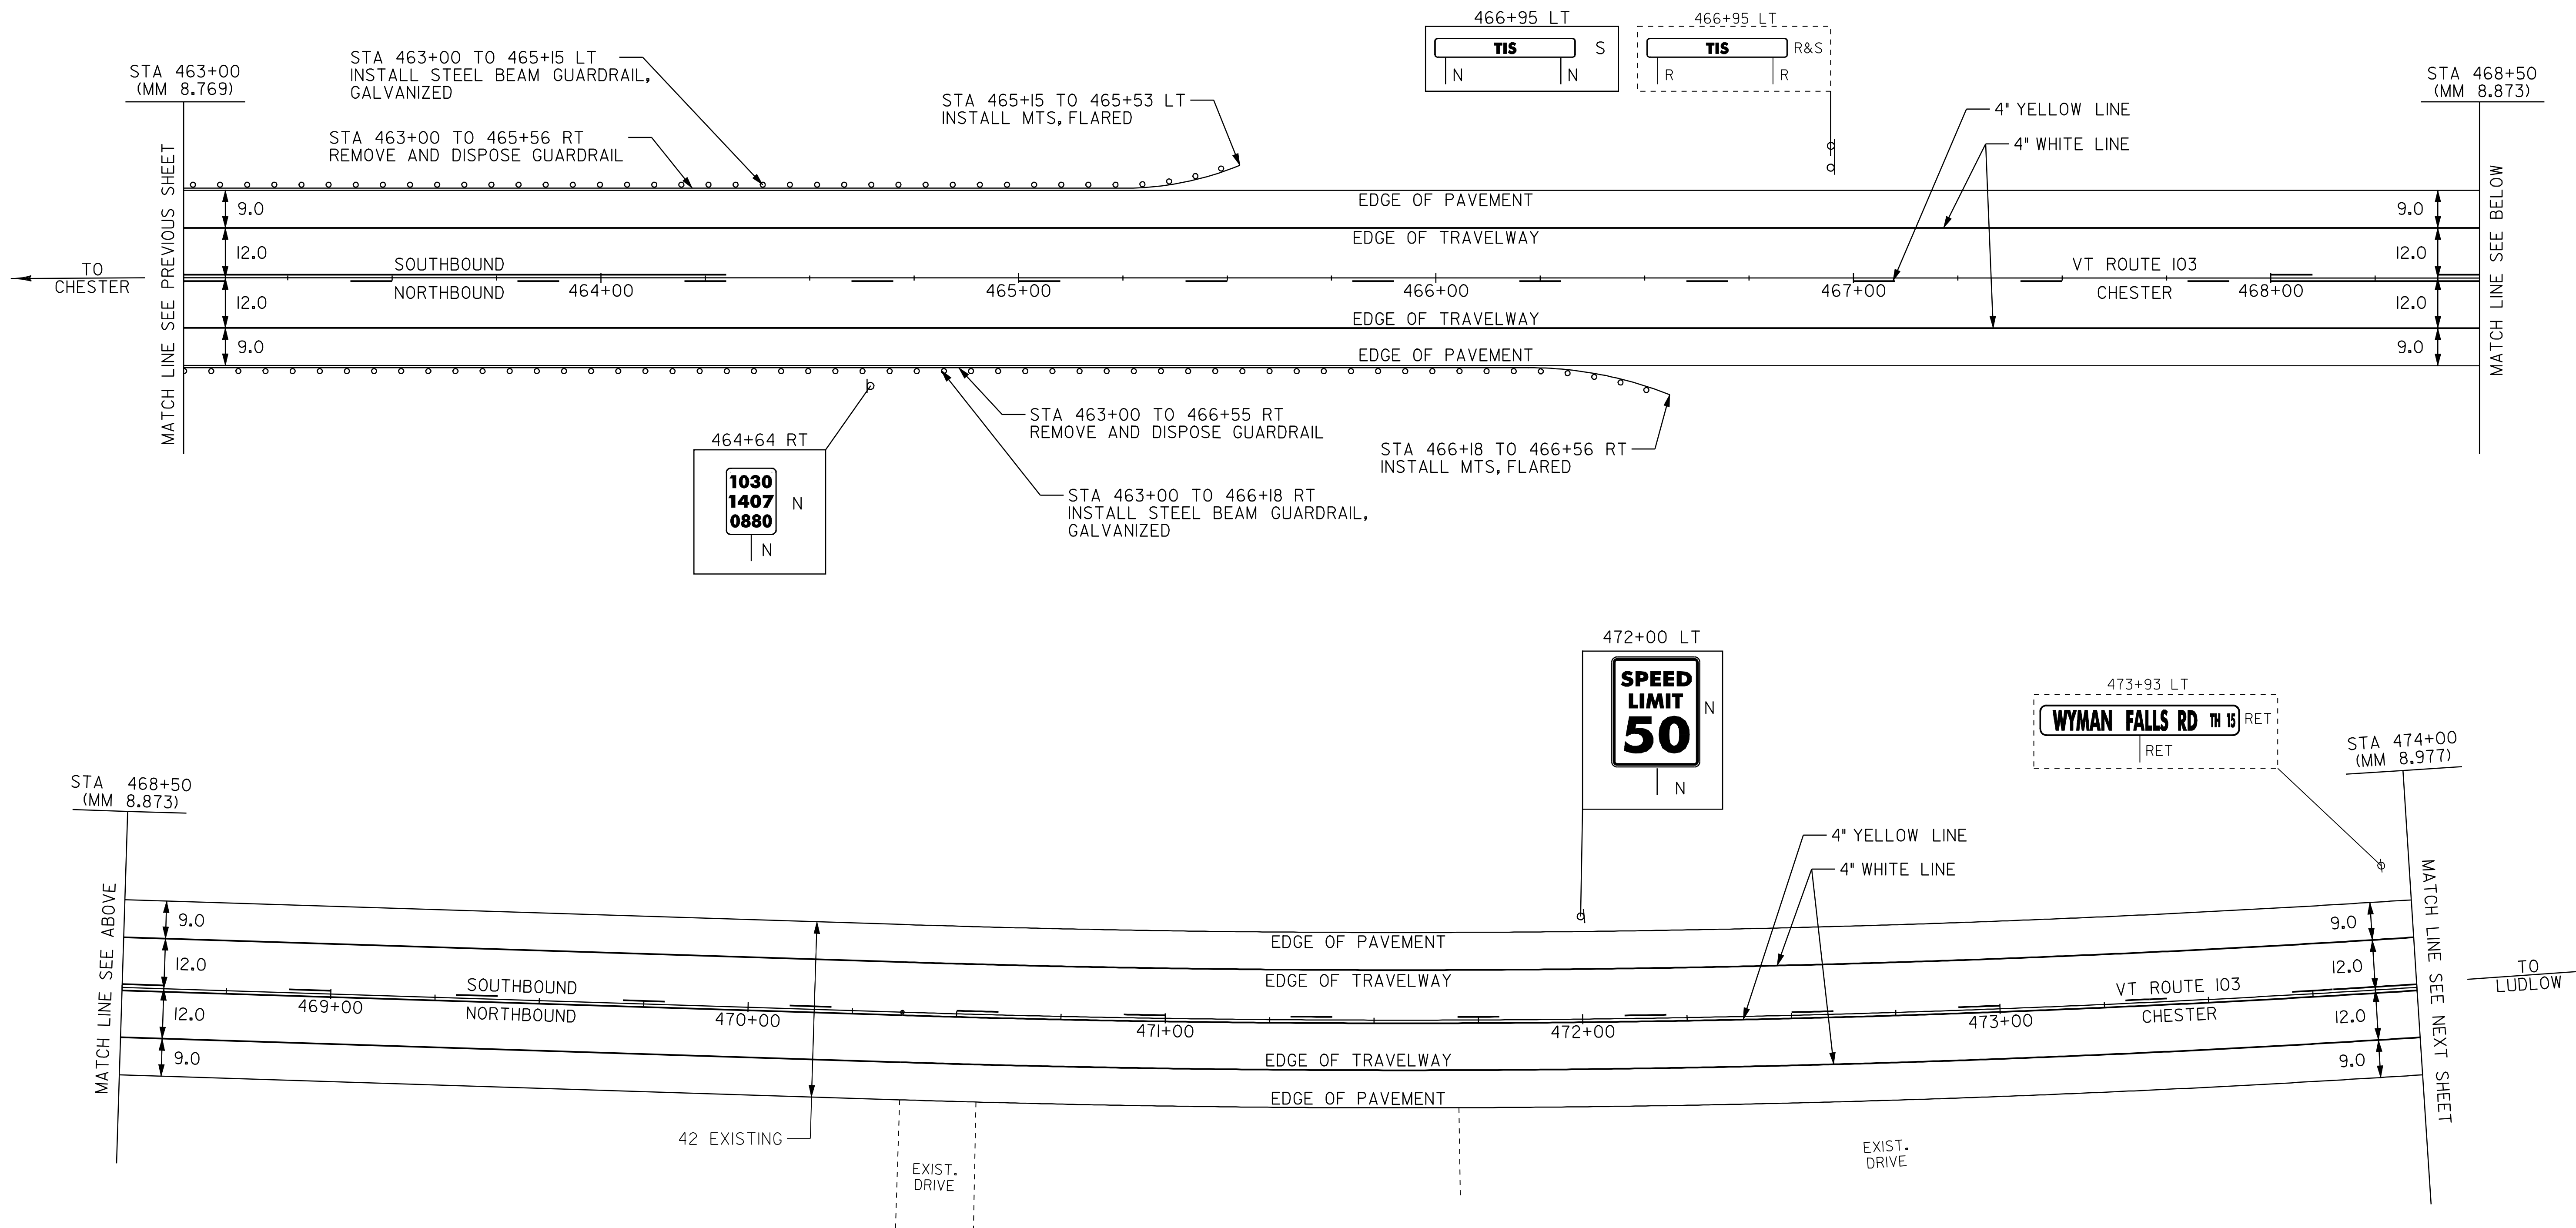

- LEGEND**
- R = REMOVE EXISTING
 - S = SALVAGE
 - R&S = REMOVE AND SALVAGE
 - N = NEW
 - RET = RETAIN
 - B-B = BACK TO BACK
 - = NEW RAIL
 - — — = EXISTING RAIL

PAVING PROJECT LAYOUT #25

PROJECT: CHESTER-LUDLOW	PROJECT NO.: NH 2326(I)S
DESIGN FILE NAME: Z:\pave\01b038\pb038.dgn	PLOT DATE: 16-OCT-2009 17:00
IPARM FILE NAME: pb0381a25.1	SURVEY DATE: 01/05/09
SURVEYED BY: CLD_ENGINEERS, INC	DRAWN BY: MRS
SQUAD LEADER: CRB	SHEET: 39 OF 110
CLD 04-0396	