


CONTROL PRODUCTS, INC.

G H RING 1 2
I J PHASE 5 6
K L PHASE 7 8
M N CMU PED DC ISO

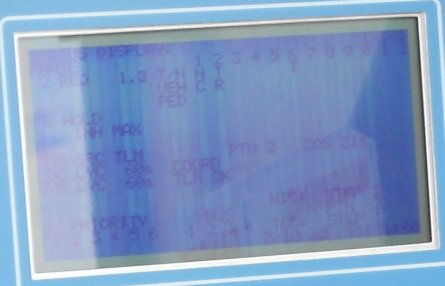

F1 MAIN MENU F2 NEXT SCREEN
F3 SUB MENU F4 NEXT DATA
F5 DISPLAY ADJUST F6 NEXT PAGE
F7 STATUS DISPLAY F8 HELP
CURSOR
1 2 3
4 5 6
7 8 9
ENTER
TOGGLE SPEC FUNC 0 CLEAR

ECONOLITE CONTROL PRODUCTS, INC.

DSP ADJ

A 115 VAC 1 AMP SLO-BLO +24 VDC 3/4 AMP SLO-BLO

PORT 3 PORT 1 PORT 2
TLM DLC TERM TLM

D C B A
A 2100

RESET AFTER MODIFYING SWITCHES
FAULT MONITOR FAIL
RESET POWER MODE INC PREV FAIL
MIN.FLASH 6421AB DUAL SEL 8421AB OPTIONS ABCDEF
GY ENABLE WD ENABLE VM LATCH CVM LOG DISABLE BND DISABLE WALK DISABLE
SSM SSM
ENABLE 1 2 3 4 5 6 7 8 9 10 11 12 ENABLE
1/4 AMP SLOW BLOW
ECONOLITE CONTROL PRODUCTS, INC. ANALOG 12288 SSM12LE-PR

JUMPER SIDE

CCM Interconnect Model 5300
TXD RXD PWR
2/4 Wire Comm
5232

YELLOW GREEN

VELOC AC-CTRL FLSH