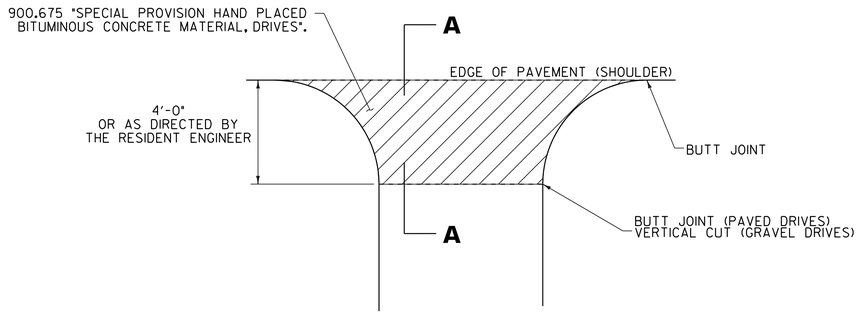

PLAN

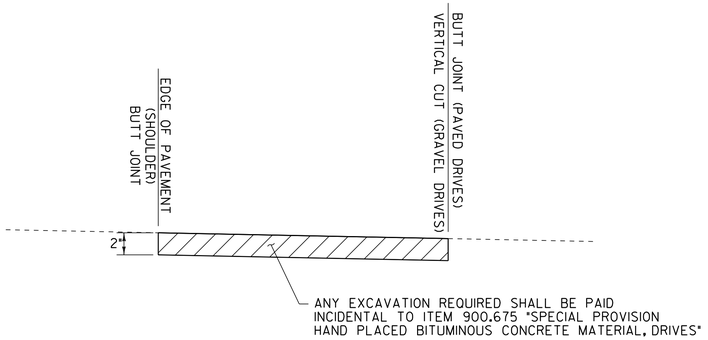

SECTION A–A

HANDWORK DETAILS FOR DRIVES

VT ROUTE 113

NOTES:

1. PAVING LIFT NOT TO EXCEED 2" (50mm)

2. THE COST OF FURNISHING AND PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675 "SPECIAL PROVISION HAND PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES".

3. EXCAVATION NEEDED TO ACHIEVE PROPER DRIVE SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675 "SPECIAL PROVISION HAND PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES".

LEGEND

BITUMINOUS PAVEMENT, 900.675 "SPECIAL PROVISION HAND PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES"

STATION	POSITION	QUANTITY (SY)
1+15	RT	11.1
2+36	RT	12
3+21	RT	18.2
4+89	LT	8.5
6+44	LT	17.8
7+13	LT	5.3
7+33	LT	8
7+79	LT	5.3
8+18	LT	6.7
8+49	RT	4.4
16+77	LT	10.4
20+36	LT	25.3
22+36	RT	9.9
27+43	RT	17.5
27+49	LT	20
32+59	LT	30.8
40+13	LT	12
41+50	LT	10.3
43+90	RT	15
44+75	RT	10.1
46+99	LT	15.7
48+13	LT	14.6
48+34	RT	8.7
50+00	LT	6.7
50+76	LT	14.1
51+73	RT	11.9
60+45	RT	6.4
66+55	LT	21.4
75+41	RT	22.8
77+90	RT	28
83+49	RT	12.2
85+69	RT	10.6
86+42	LT	23.6
90+22	RT	20.4
94+58	RT	12.4
96+91	LT	31.3
114+65	RT	11
118+87	LT	7.6

STATION	POSITION	QUANTITY (SY)
127+26	RT	46
127+63	LT	10.4
137+22	LT	37
141+27	LT	17
151+22	LT	12.2
161+91	LT	12
166+01	LT	34
171+26	LT	11.1
175+00	RT	8.4
176+57	LT	20.9
177+71	RT	17.4
VERSHIRE		
3+30	LT	39.3
5+03	LT	20.2
6+25	LT	9.6
11+50	RT	13.3
11+54	LT	16
15+12	LT	16
17+76	LT	82.7
22+07	LT	12.2
23+23	RT	16.3
26+87	LT	22.6
28+04	LT	13.3
33+78	LT	13.7
37+90	LT	16.2
44+98	LT	20.1
49+60	LT	15.7
50+32	RT	40.5
51+27	LT	22.8
54+51	RT	18.7
60+57	RT	12.9
62+80	LT	13.2
66+52	RT	9.8
67+02	LT	12.9
69+02	RT	44.4
75+32	LT	12.5
75+79	RT	13.1

STATION	POSITION	QUANTITY (SY)
79+21	RT	12
80+04	RT	8.9
81+92	LT	10.4
86+30	RT	24.2
86+49	LT	11.4
87+12	RT	10.7
91+92	RT	7.5
92+05	LT	16.2
92+57	RT	13.9
95+36	RT	14.9
96+33	RT	21.7
97+97	LT	12.6
101+11	LT	14.5
103+73	LT	17.9
105+33	LT	20
107+16	RT	17.7
108+41	LT	8.4
108+99	RT	15.7
109+45	LT	14.3
112+31	LT	13.5
115+21	RT	82.2
116+41	RT	27.3
120+87	LT	15.6
125+69	LT	12.6
139+89	LT	8.1
146+49	RT	8.7
157+81	RT	8.7
167+57	RT	7.3
170+92	RT	65.7
179+75	LT	16.3
182+80	LT	18.4
186+07	LT	67.2
	SUBTOTAL	1916.9
	ROUNDING	33.1
	TOTAL	1950

DETAILS ARE NOT TO SCALE

HANDWORK DETAILS FOR DRIVES

PROJECT NAME: CHELSEA-VERSHIRE
PROJECT NUMBER: STP 2331(1)S

FILE NAME: 01c040.dgn
PROJECT LEADER: CDL
DESIGNED BY: SJL
PLOT FILE: 01c040_09.i

PLOT DATE: 28-OCT-2011 13:35
DRAWN BY: SJL
CHECKED BY: EPD
SHEET 9 OF 55