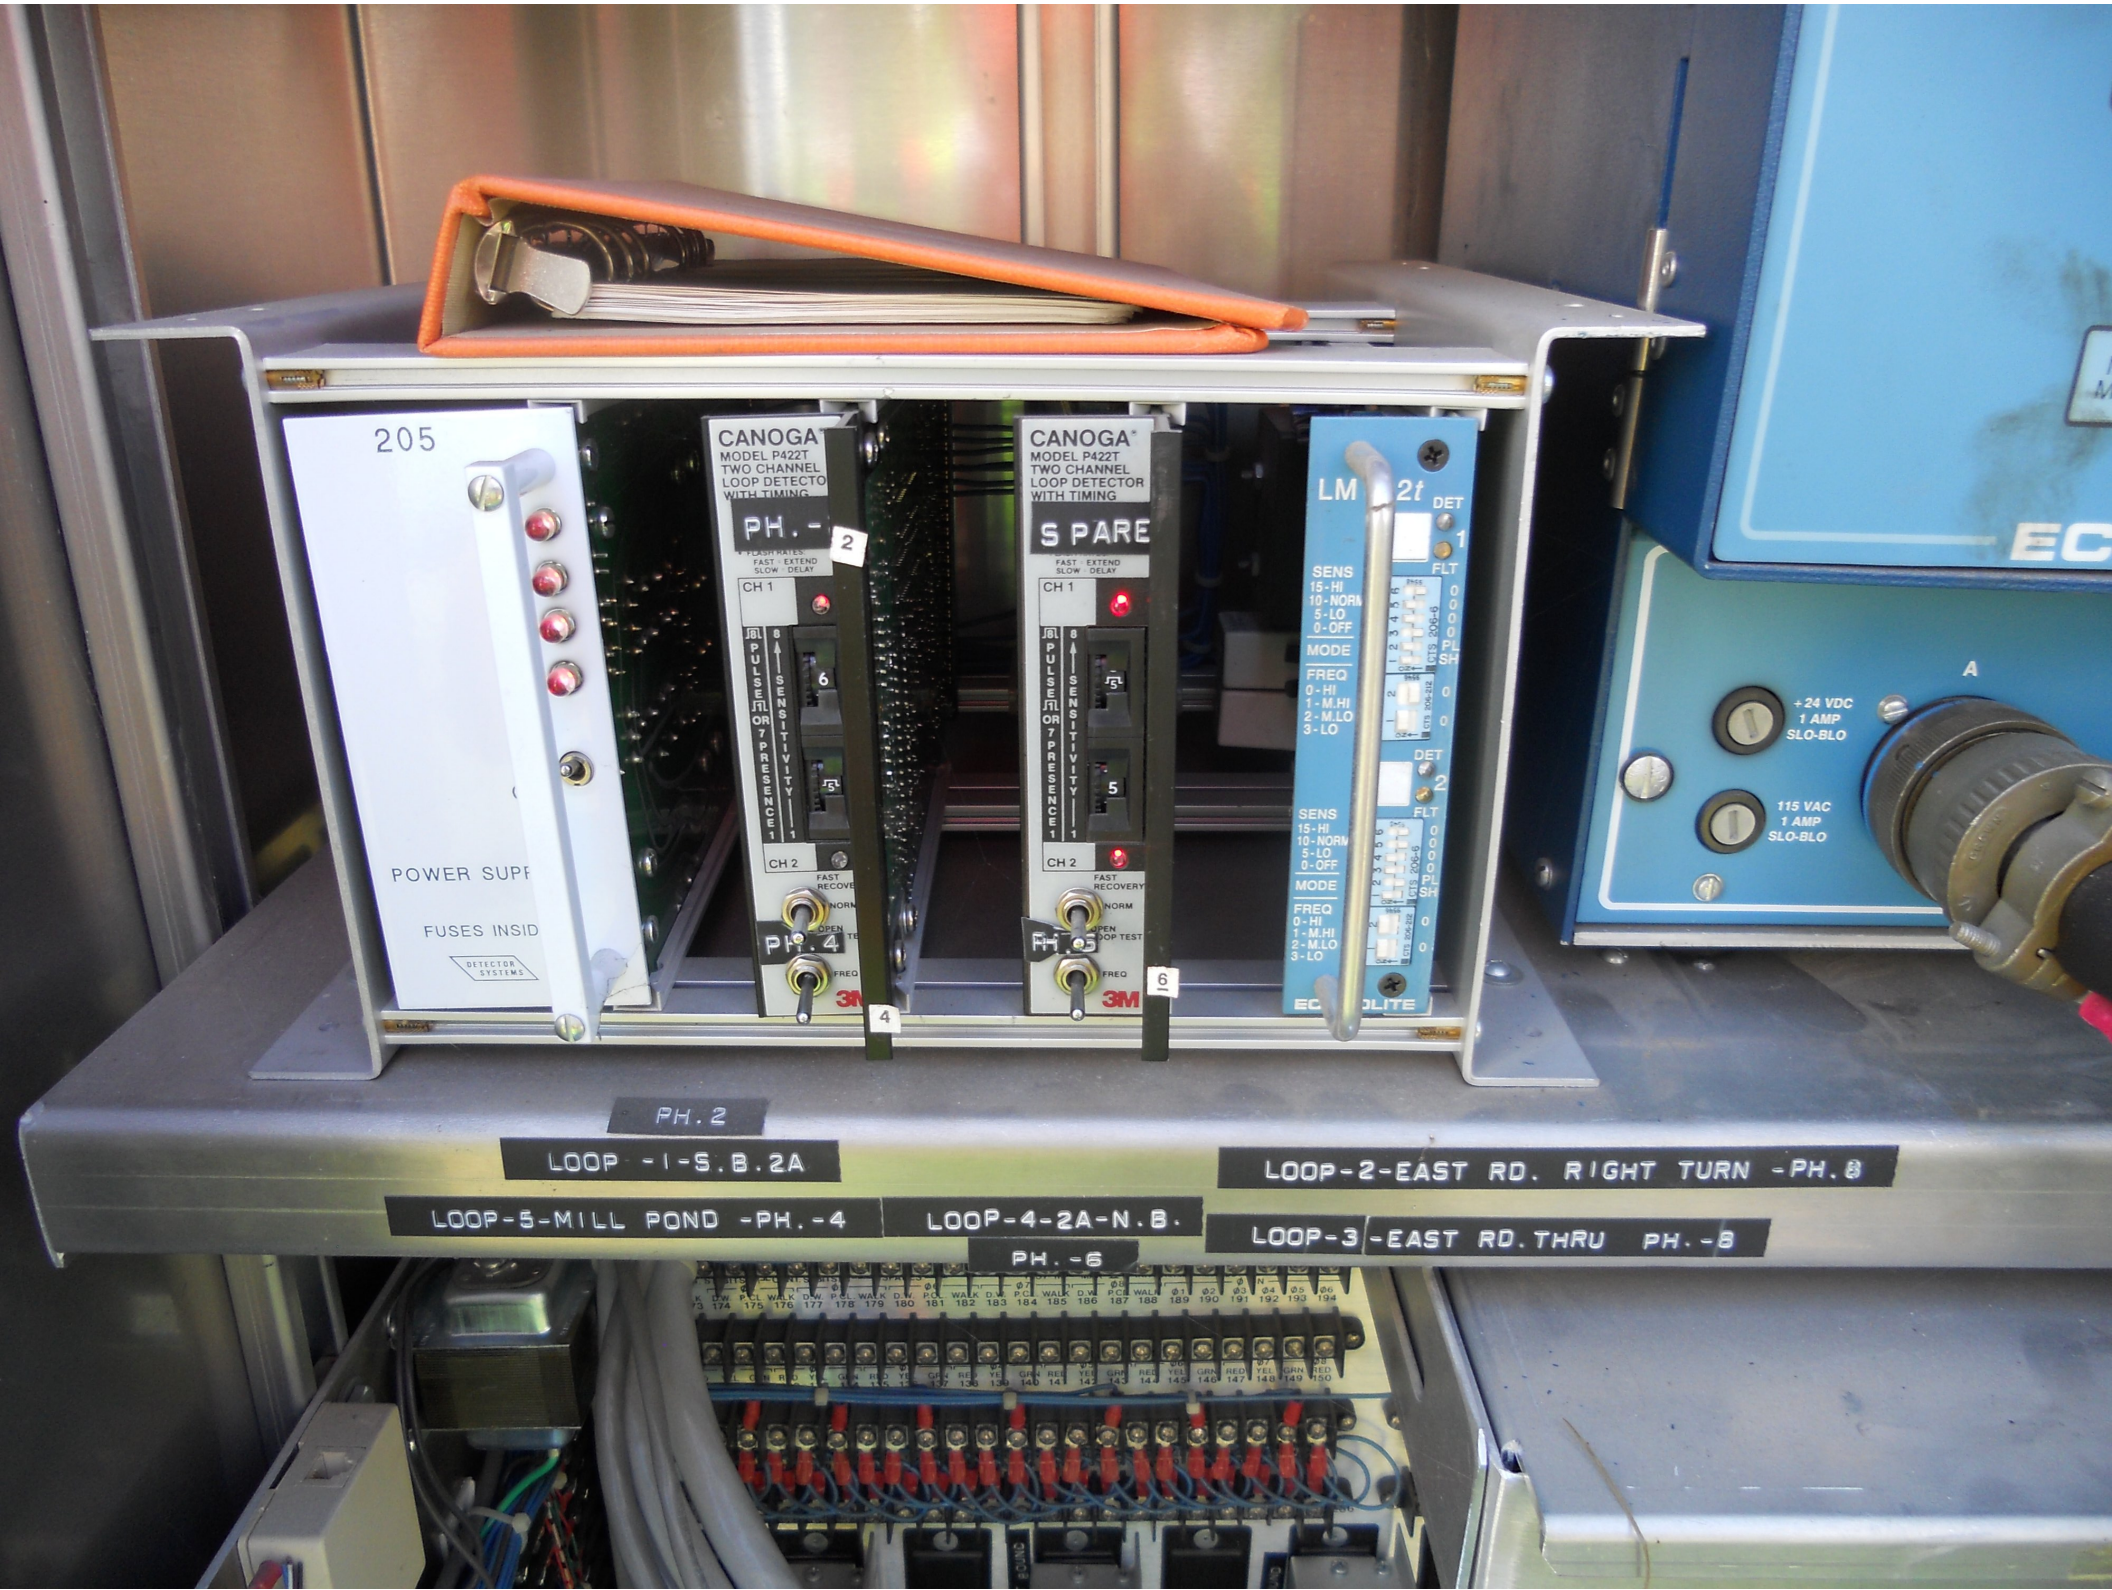
205
POWER SUPP
FUSES INSID
CANOGA
MODEL P422T
TWO CHANNEL
LOOP DETECTOR
WITH TIMING
PH.-2
CH 1
CH 2
PULSE OR PRESENCE
SENSITIVITY
FAST RECOVERY
NORM
OPEN
LOOP TEST
FREQ
3M
PH.-4
CANOGA
MODEL P422T
TWO CHANNEL
LOOP DETECTOR
WITH TIMING
SPARE
PH.-6
LM 2t
DET
FLT
SENS
15-HI
10-NORM
5-LO
0-OFF
MODE
FREQ
0-HI
1-M.HI
2-M.LO
3-LO
ECOLITE
+24 VDC
1 AMP
SLO-BLO
115 VAC
1 AMP
SLO-BLO
PH.2
LOOP -1-S.B.2A
LOOP-2-EAST RD. RIGHT TURN -PH.8
LOOP-5-MILL POND -PH.-4
LOOP-4-2A-N.B.
PH.-6
LOOP-3 -EAST RD.THRU PH.-8