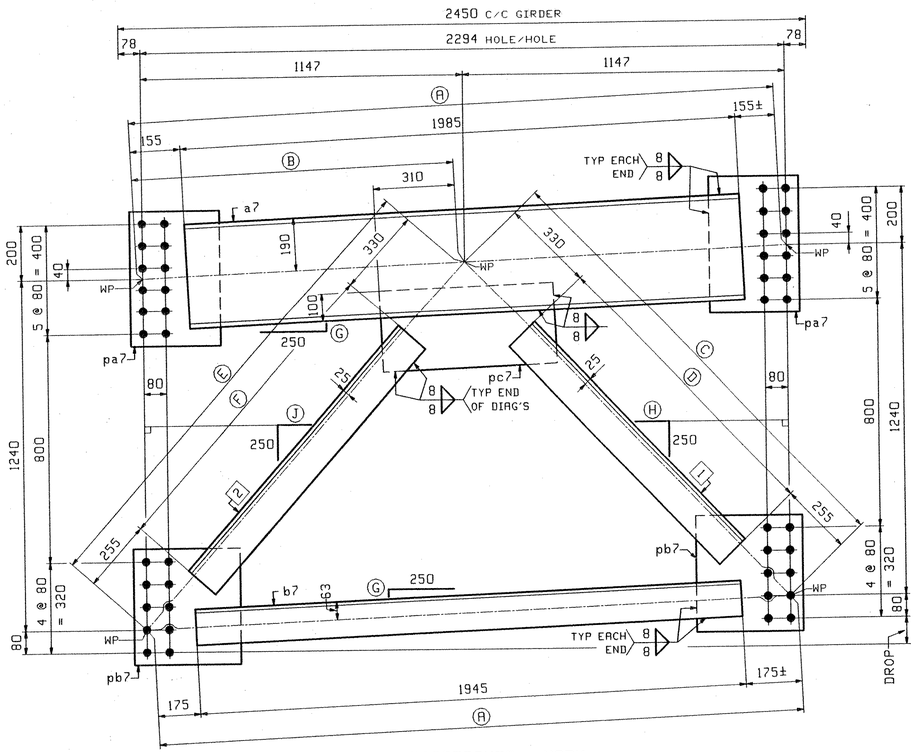

END CROSSFRAMES ~ MARK

	MARK	QTY	DROP	Ⓐ	Ⓑ	Ⓒ	Ⓓ	Ⓔ	Ⓕ	Ⓖ	Ⓗ	Ⓙ	1	2	
PAINTED →	8CF1	1	98	2296	1148	1654	1069	1725	1140	11	241	222	c7	d7	PIER LINES 4-5
	8CF2	1	64	2295	1147	1666	1081	1713	1128	7	237	225	f7	g7	ABUT 2 LINES 1-2
PAINTED →	8CF3	1	49	2295	1147	1671	1086	1707	1122	5	236	227	k7	m7	PIER LINES 3-4
	8CF4	1	16	2294	1147	1683	1098	1695	1110	2	233	230	n7	p7	ABUT 2 LINES 2-3

BILL OF MATERIAL

ABM INFO PAGE	ABM INFO LINE	SHIP MARK	QTY	MARK	MATERIAL	LENGTH m	LENGTH mm	REMARKS	WT	PROCUREMENT NOTES
		8CF1	1		END CROSSFRAMES			PAINTED	288 kg 634 lbs	
2	R		1	a7	C 380x50	1	985			
2	S		1	b7	L 127x127x12.7	1	945			
2	T		1	c7	L 127x127x12.7	1	069			
2	T		1	d7	L 127x127x12.7	1	140			
2	U		2	pa7	PL 14x320	0	490			
2	V		2	pb7	PL 14x380	0	410			
2	W		1	pc7	PL 14x290	0	620			
		8CF2	1		END CROSSFRAMES				288 kg 634 lbs	
2	R		1	a7	C 380x50	1	985			
2	S		1	b7	L 127x127x12.7	1	945			
2	T		1	f7	L 127x127x12.7	1	081			
2	T		1	g7	L 127x127x12.7	1	128			
2	U		2	pa7	PL 14x320	0	490			
2	V		2	pb7	PL 14x380	0	410			
2	W		1	pc7	PL 14x290	0	620			
		8CF3	1		END CROSSFRAMES			PAINTED	288 kg 634 lbs	
2	R		1	a7	C 380x50	1	985			
2	S		1	b7	L 127x127x12.7	1	945			
2	T		1	k7	L 127x127x12.7	1	086			
2	T		1	m7	L 127x127x12.7	1	122			
2	U		2	pa7	PL 14x320	0	490			
2	V		2	pb7	PL 14x380	0	410			
2	W		1	pc7	PL 14x290	0	620			
		8CF4	1		END CROSSFRAMES				288 kg 634 lbs	
2	R		1	a7	C 380x50	1	985			
2	S		1	b7	L 127x127x12.7	1	945			
2	T		1	n7	L 127x127x12.7	1	098			
2	T		1	p7	L 127x127x12.7	1	110			
2	U		2	pa7	PL 14x320	0	490			
2	V		2	pb7	PL 14x380	0	410			
2	W		1	pc7	PL 14x290	0	620			

JOB NO. | DRAWING NO. 8 | REV.

REV.	REMARKS	DATE	DWN	CHK	APP	Q.A.	NO.	DIA.	LGT	TYPE	WASHER
	OUT FOR APPROVAL	7-5-05									
	OUT FOR APPROVAL										
	ISSUED TO SHOP										
	FIELD & OFFICE										

MATERIAL: M270M GR 345W

ELECTRODES:

HOLES: 15/16 Ø 24mm

SHOP BOLTS: NONE

SURFACE PREP. & PAINT:

SEE DRAWING GN1

DESCRIPTION: END CROSSFRAMES

JOB: VT ROUTE 12 BRIDGE OVER WHITE RIVER
BRIDGE NO: 31 (SPAN #2)
TOWN OF BETHEL, VERMONT
COUNTY OF WINDSOR
CONTRACTOR: KUBRICKY CONST CORP.

TENSOR 2563

PROJ NO. BRF0241(33) C/2

CUSTOMER: VERMONT AOT

DRAWN BY	JTB	DATE 05/3
CHKD BY		
TJB		06/2
APPROV BY		
SUPERVISOR	W. J. GAITI	
Q.A.		

CASCO BAY STEEL STRUCTURES, INC.
75 SPRING HILL ROAD SACO, MAINE 04072
PHONE (207) 282-7360 FAX. (207) 282-1179

JOB NO. 270 | DRG. NO. 8 | REV.

RECEIVED
CK'D BY Kevin OK'D BY HJS
JUL 14 2005
RESUBMIT ____ APPROVED As Noted
BY CPW DATE 7/28/05

JTB Mon May 30 15:37:46 EDT 2005 /users/jaw/2563-8 : Rev0