LOCATION				FEET OF DITCHING				MISC. ITEMS					REMARKS
								654.10	613.10	613.11	649.31	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				EROS. MATT.	STONE FILL TYP. I	STONE FILL TYPE II	GEOT. UNDER STONE FILL	SEED	
				0-1	1-2.5	2.5-10	>10	SY	CY	CY	SY	LB	
U.S. ROUTE 7													
TOWN OF CLARENDON													
1	85+91		RT			25			3		14		CLEAN OUTLET DITCH
2	110+88		RT			25			3		14		CLEAN OUTLET DITCH
3	130+25		RT			25			3		14		CLEAN OUTLET DITCH
4	150+11		RT			25			3		14		CLEAN OUTLET DITCH
5	152+59		RT			25			3		14		CLEAN OUTLET DITCH
6	156+66		RT			25			3		14		CLEAN OUTLET DITCH
7	161+04		RT			25			3		14		CLEAN OUTLET DITCH
8	171+60		RT		100			33					CLEAN OUTLET DITCH
9	178+94		RT			25			3		14		CLEAN OUTLET DITCH
10	186+28		RT			25			3		14		CLEAN OUTLET DITCH
11	267+06		RT			25			3		14		CLEAN OUTLET DITCH
12	278+78	288+29	RT		951			317					CLEAN & SHAPE OUTLET DITCH
ROUNDING								-	-		5		
TOTALS					1051	250		350	30		145		

LOCATION				FEET OF DITCHING				MISC. ITEMS					REMARKS
								654.10	613.10	613.11	649.31	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				EROS. MATT.	STONE FILL TYP. I	STONE FILL TYPE II	GEOT. UNDER STONE FILL	SEED	
				0-1	1-2.5	2.5-10	>10	SY	CY	CY	SY	LB	

LOCATION				FEET OF DITCHING				MISC. ITEMS					REMARKS
								654.10	613.10	613.11	649.31	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				EROS. MATT.	STONE FILL TYP. I	STONE FILL TYPE II	GEOT. UNDER STONE FILL	SEED	
				0-1	1-2.5	2.5-10	>10	SY	CY	CY	SY	LB	

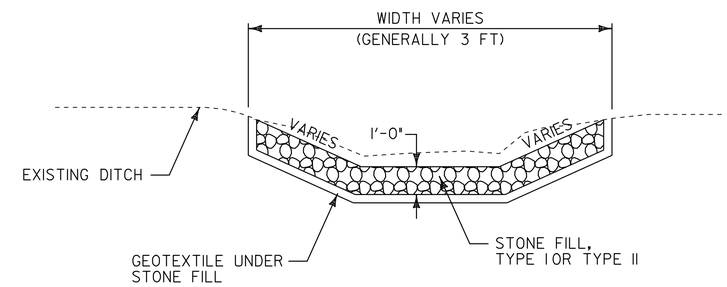

DITCH DETAIL
N.T.S.

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. ESTIMATED QUANTITIES OF EROSION MATTING, SEED, STONE FILL TYPE I AND STONE FILL TYPE II HAVE BEEN INCLUDED AS REQUIRED. DITCHES WITH GRADES LESS THAN 1 PERCENT SHALL BE SEEDED. EROSION MATTING SHALL BE USED IN ALL DITCHES WITH GRADES BETWEEN 1 AND 2.5 PERCENT. STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH GRADES BETWEEN 2.5 AND 10 PERCENT. STONE FILL TYPE II SHALL BE USED IN ALL DITCHES WITH GRADES GREATER THAN 10 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

DITCH CLEANING DETAIL SHEET

PROJECT NAME: WALLINGFORD - RUTLAND TOWN
PROJECT NUMBER: NH 2408(1)S

FILE NAME: p04b050.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: J.S.P.
IPARM FILE: p04b050dc.I

PLOT DATE: $DATE$
DRAWN BY: C.A.K.
CHECKED BY: D.E.G.
SHEET 12 OF 80