

646.414 DURABLE 6" WHITE LINE (MOD.) (RETROREFLECTIVITY/INLAID)
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

CLARENDON:
 STA. 80+00.00 - STA. 96+00.00 DASHED LINE C/L
 STA. 80+00.00 - STA. 96+00.00 EDGE LINE LT
 STA. 80+00.00 - STA. 80+75.00 DOTTED LANE LINE LT
 STA. 80+00.00 - STA. 80+75.00 SOLID LANE LINE RT
 STA. 80+75.00 - STA. 82+75.00 DOTTED LANE LINE RT

646.415 DURABLE 6" YELLOW LINE (MOD.) (RETROREFLECTIVITY/INLAID)
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

CLARENDON:
 STA. 80+00.00 - STA. 96+00.00 EDGE LINE RT

646.614 TEMPORARY 6" WHITE LINE (PAINT)
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

CLARENDON:
 STA. 80+00.00 - STA. 96+00.00 DASHED LINE C/L
 STA. 80+00.00 - STA. 96+00.00 EDGE LINE LT
 STA. 80+00.00 - STA. 80+75.00 DOTTED LANE LINE LT
 STA. 80+00.00 - STA. 80+75.00 SOLID LANE LINE RT
 STA. 80+75.00 - STA. 82+75.00 DOTTED LANE LINE RT

646.615 TEMPORARY 6" YELLOW LINE (PAINT)
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

CLARENDON:
 STA. 80+00.00 - STA. 96+00.00 EDGE LINE RT


646.50 DURABLE LETTER OR SYMBOL (THERMOPLASTIC)

CLARENDON:
 STA. 80+11.5 RT, ARROW (1EA)
 STA. 80+70.8 RT, "O,N,L,Y" (4 EA)

646.70 TEMPORARY LETTER OR SYMBOL (PAINT)

CLARENDON:
 STA. 80+11.5 RT, ARROW (2 EA)

675.50 REMOVING SIGNS
 AS SHOWN - 4

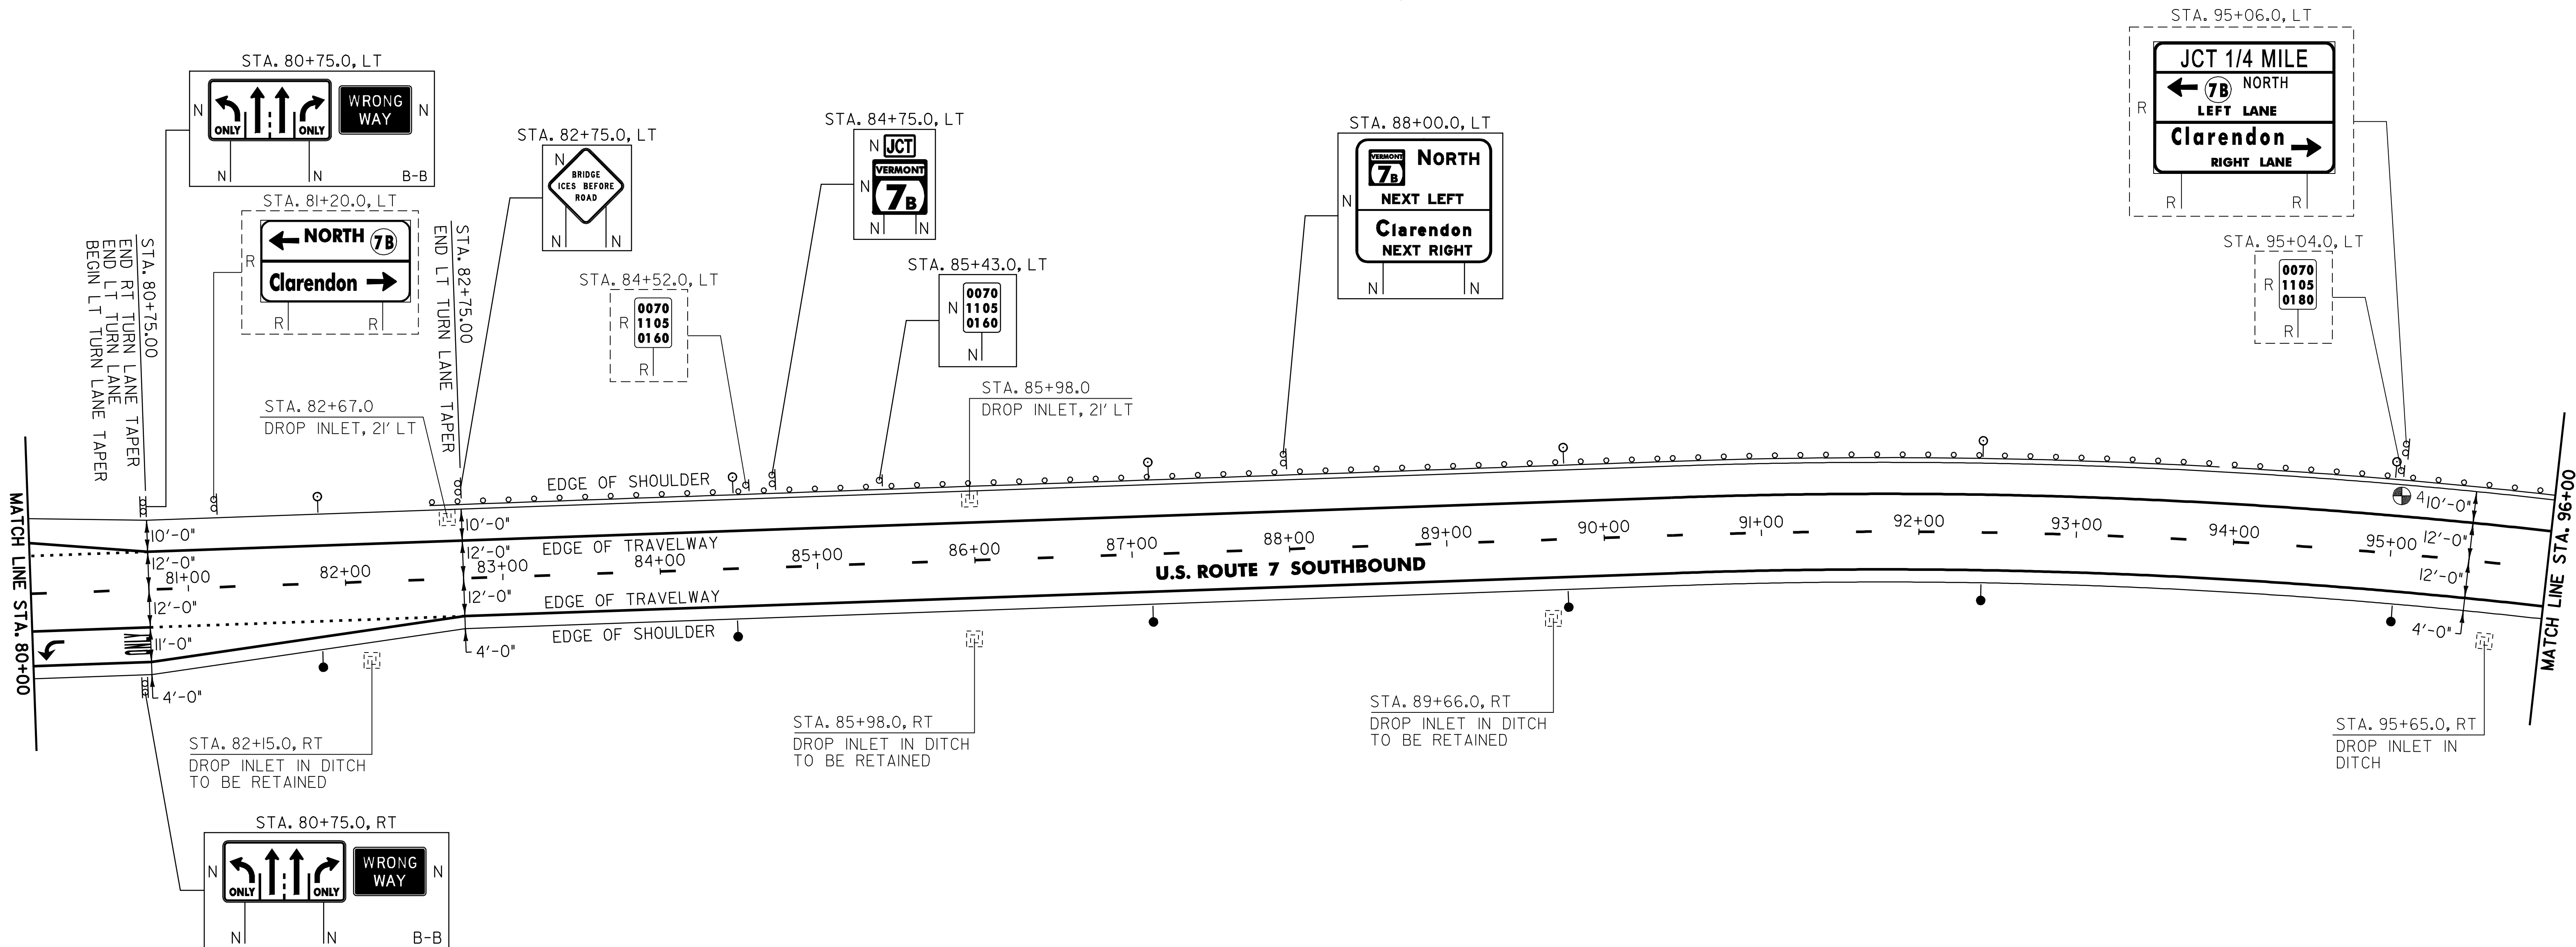

213.10 MILLED RUMBLE STRIPS

CLARENDON:
 STA. 80+75.0 - STA. 96+00.0 LT (1525 LF)
 STA. 82+75.0 - STA. 96+00.0 RT (1325 LF)

604.412 REHABING DI, CB OR MH, CLASS 1

CLARENDON:
 STA. 82+67.0 LT
 STA. 85+98.0 LT
 STA. 95+65.0 RT

616.35 TREATED TIMBER CURB

CLARENDON:
 STA. 82+65.0 - STA. 88+73.0 LT (608 LF)

621.20 STEEL BEAM GUARDRAIL (GALVANIZED)

CLARENDON:
 STA. 82+69.0 - STA. 96+00.0 LT (1331 LF)

621.52 TRAILING END TERMINAL

CLARENDON:
 STA. 82+55.0 - STA. 82+69.0 LT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL

CLARENDON:
 STA. 82+57.0 - STA. 96+00.0 LT (1343 LF)

676.10 DELINEATORS WITH STEEL POSTS

○ TYPE 1 WHITE ● TYPE 1 AMBER

CLARENDON:
 STA. 81+84.0 LT STA. 81+84.0 RT
 STA. 84+48.0 LT STA. 84+48.0 RT
 STA. 87+12.0 LT STA. 87+12.0 RT
 STA. 89+76.0 LT STA. 89+76.0 RT
 STA. 92+40.0 LT STA. 92+40.0 RT
 STA. 95+04.0 LT STA. 95+04.0 RT

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = -----
 NEW = _____

PAVEMENT CORES = ●

No.	TOTAL DEPTH (Inches)	PCC	COMMENTS
4	1,625	NO	-

PROJECT LAYOUT SHEET #8

PROJECT NAME: WALLINGFORD - RUTLAND TOWN
 PROJECT NUMBER: NH 2408(1)S
 FILE NAME: p04b050.dgn PLOT DATE: \$DATE\$
 PROJECT LEADER: D.E.G. DRAWN BY: C.A.K.
 DESIGNED BY: J.S.P. CHECKED BY: D.E.G.
 IPARM FILE: p04b050L08.I SHEET 20 OF 80