

646.406 DURABLE 4 INCH WHITE LINE, RECESSED POLYUREA
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)
 U.S. ROUTE 7:
 STA 63+50.00 - STA 66+00.00 DASHED LANE LINE LT
 STA 63+50.00 - STA 66+00.00 DASHED LANE LINE RT
 STA 63+50.00 - STA 66+00.00 EDGE LINE LT & RT
 STA 63+70.00 - STA 65+15.00 DOTTED LANE LINE RT
 STA 65+40.00 - STA 65+65.00 DO NOT BLOCK INTERSECTION CROSS HATCH, RT
 STA 65+15.00 - STA 66+00.00 SOLID LANE LINE RT

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)
 U.S. ROUTE 7:
 STA 63+50.00 - STA 66+00.00 DASHED LANE LINE LT
 STA 63+50.00 - STA 66+00.00 DASHED LANE LINE RT
 STA 63+50.00 - STA 66+00.00 EDGE LINE LT & RT
 STA 63+70.00 - STA 65+15.00 DOTTED LANE LINE RT
 STA 65+15.00 - STA 66+00.00 SOLID LANE LINE RT

646.416 DURABLE 4 INCH YELLOW LINE, RECESSED POLYUREA
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS)
 U.S. ROUTE 7:
 STA 63+50.00 - STA 65+15.00 DOUBLE SOLID MEDIAN CL/RT
 STA 65+15.00 - STA 66+00.00 DOUBLE SOLID CL
 STA 65+52.48 DOUBLE SOLID RT, MANSFIELD PLACE

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS)
 U.S. ROUTE 7:
 STA 63+50.00 - STA 65+15.00 DOUBLE SOLID MEDIAN CL/RT
 STA 65+15.00 - STA 66+00.00 DOUBLE SOLID CL
 STA 65+52.48 DOUBLE SOLID RT, MANSFIELD PLACE

646.446 DURABLE 8 INCH WHITE LINE, RECESSED POLYUREA
 U.S. ROUTE 7:
 STA 65+40.00 - STA 65+65.00 DO NOT BLOCK INTERSECTION BOX, RT


646.456 DURABLE 8 INCH YELLOW LINE, RECESSED POLYUREA
 U.S. ROUTE 7:
 STA 63+50.00 - STA 65+15.00 HATCHED MEDIAN CL/RT

616.28 CAST-IN-PLACE CONCRETE CURB, TYPE B
 U.S. ROUTE 7:
 STA 65+38.0 RT (14.0 LF)
 STA 65+67.0 RT (14.0 LF)

618.10 PORTLAND CEMENT CONCRETE SIDEWALK, 5 INCH
 U.S. ROUTE 7:
 STA 65+38.0 RT (6.7 SF)
 STA 65+67.0 RT (6.7 SF)

618.30 DETECTABLE WARNING SURFACE
 U.S. ROUTE 7:
 STA 65+38.0 RT (10.0 SF)
 STA 65+67.0 RT (10.0 SF)

629.20 ADJUST ELEVATION OF VALVE BOX
 U.S. ROUTE 7:
 STA 65+80.0 RT

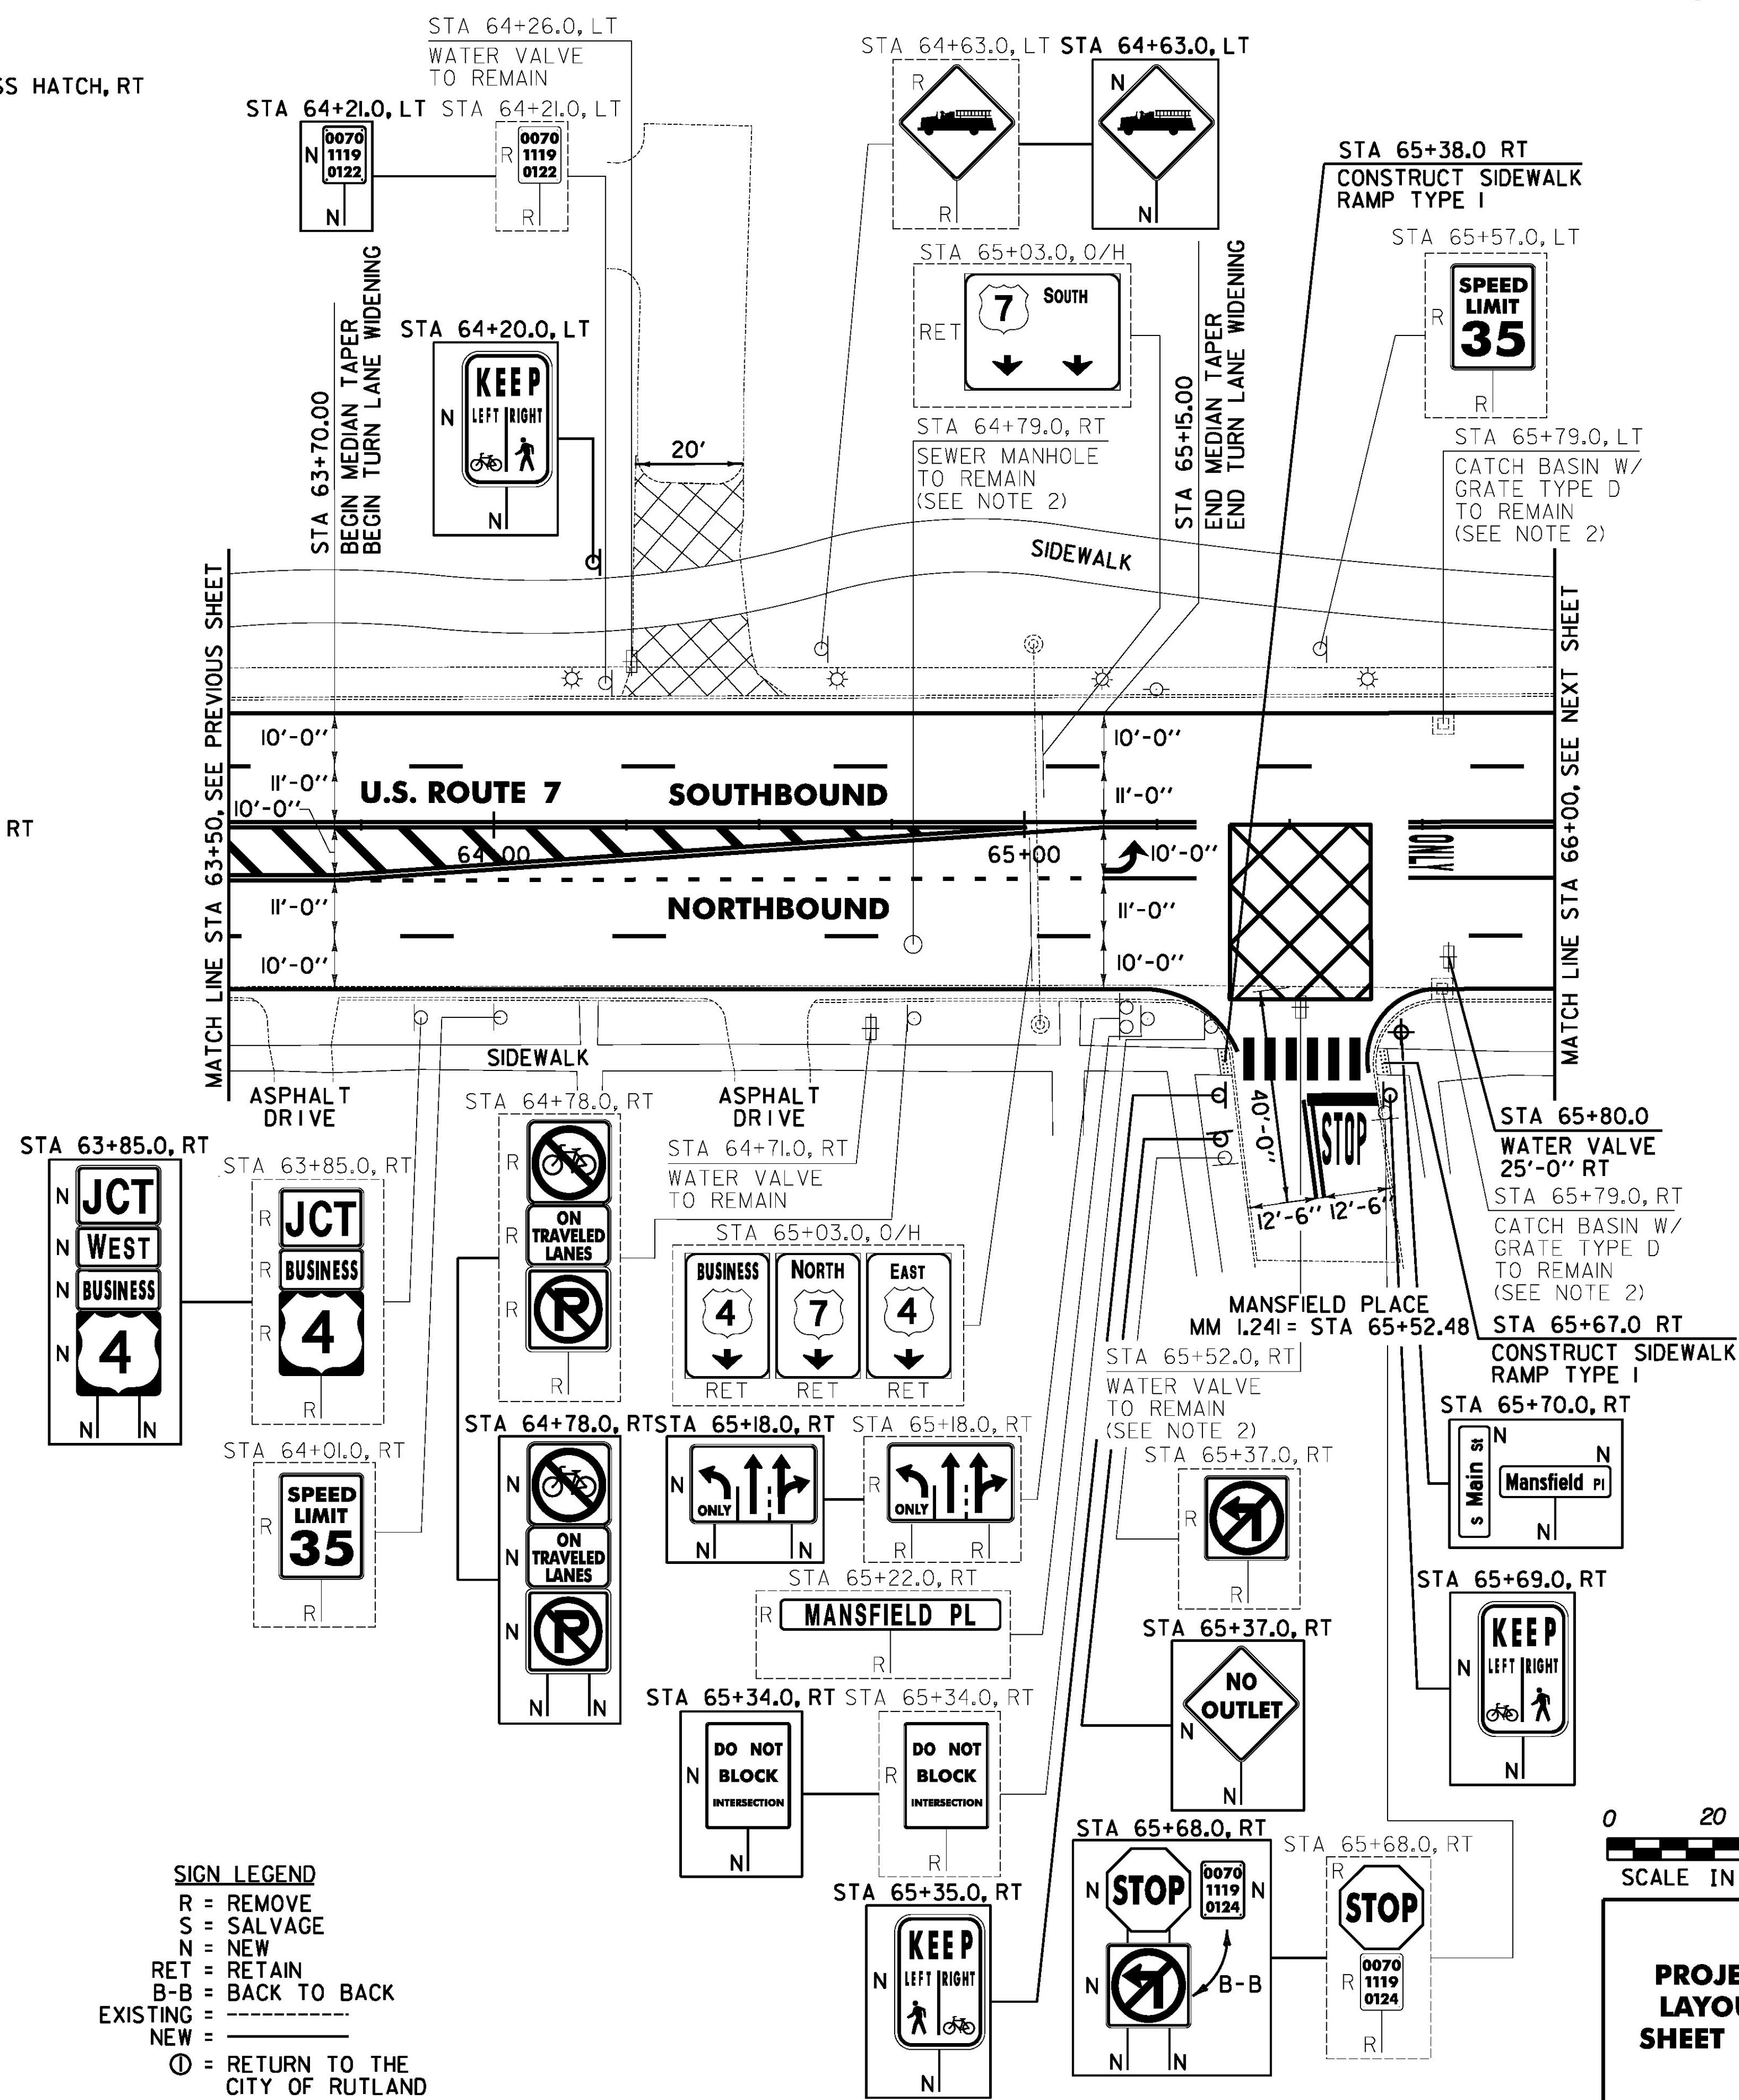

646.487 DURABLE 24 INCH STOP BAR, RECESSED TYPE I TAPE
 U.S. ROUTE 7:
 STA 65+52.48 RT, MANSFIELD PLACE

646.682 TEMPORARY 24 INCH STOP BAR, PAINT
 U.S. ROUTE 7:
 STA 65+52.48 RT, MANSFIELD PLACE

646.491 DURABLE LETTER OR SYMBOL, TYPE I TAPE
 U.S. ROUTE 7:
 STA 65+19.20 RT, ARROW (1 EA)
 STA 65+52.48 RT, MANSFIELD PLACE, "S,T,O,P" (4 EA)
 STA 65+72.00 RT, "O,N,L,Y" (4 EA)


646.501 DURABLE CROSSWALK MARKING, TYPE I TAPE
 U.S. ROUTE 7:
 STA 65+52.48 RT, MANSFIELD PLACE

646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 U.S. ROUTE 7:
 STA 65+19.20 RT, ARROW (2 EA)
 STA 65+52.48 RT, MANSFIELD PLACE, "S,T,O,P" (8 EA)

646.702 TEMPORARY CROSSWALK MARKING, PAINT
 U.S. ROUTE 7:
 STA 65+52.48 RT, MANSFIELD PLACE

675.50 REMOVING SIGNS
 AS SHOWN - 16

- NOTES:
- COLD PLANING AND PAVING LIMIT ON ALL CITY STREETS SHALL BE MEASURED 25 FT BACK FROM U.S. ROUTE 7 FACE OF CURB UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
 - INSTALLED OR ADJUSTED UNDER STP 019-3(57) PRIOR TO CONSTRUCTION.

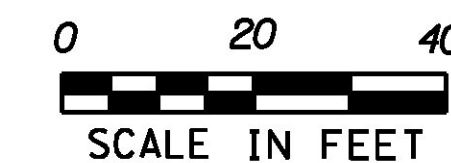

PROJECT LAYOUT SHEET #12

PROJECT NAME:	RUTLAND CITY
PROJECT NUMBER:	NH 2716(1)
FILE NAME:	p07d188.dgn
PROJECT LEADER:	D.E.G.
DESIGNED BY:	M.J.M.
IPARM FILE:	07d188i12.1
PLOT DATE:	7/19/2013
DRAWN BY:	W.G.P.
CHECKED BY:	D.E.G.
SHEET	170 OF 392

FILE NAME = I:\17765\ACADD\NORTH\NH 2716\07d188.dgn
 DATE/TIME = 7/19/2013 4:49:16
 USER =