



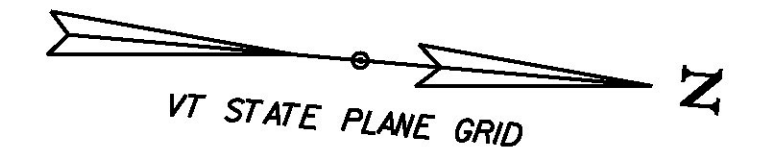
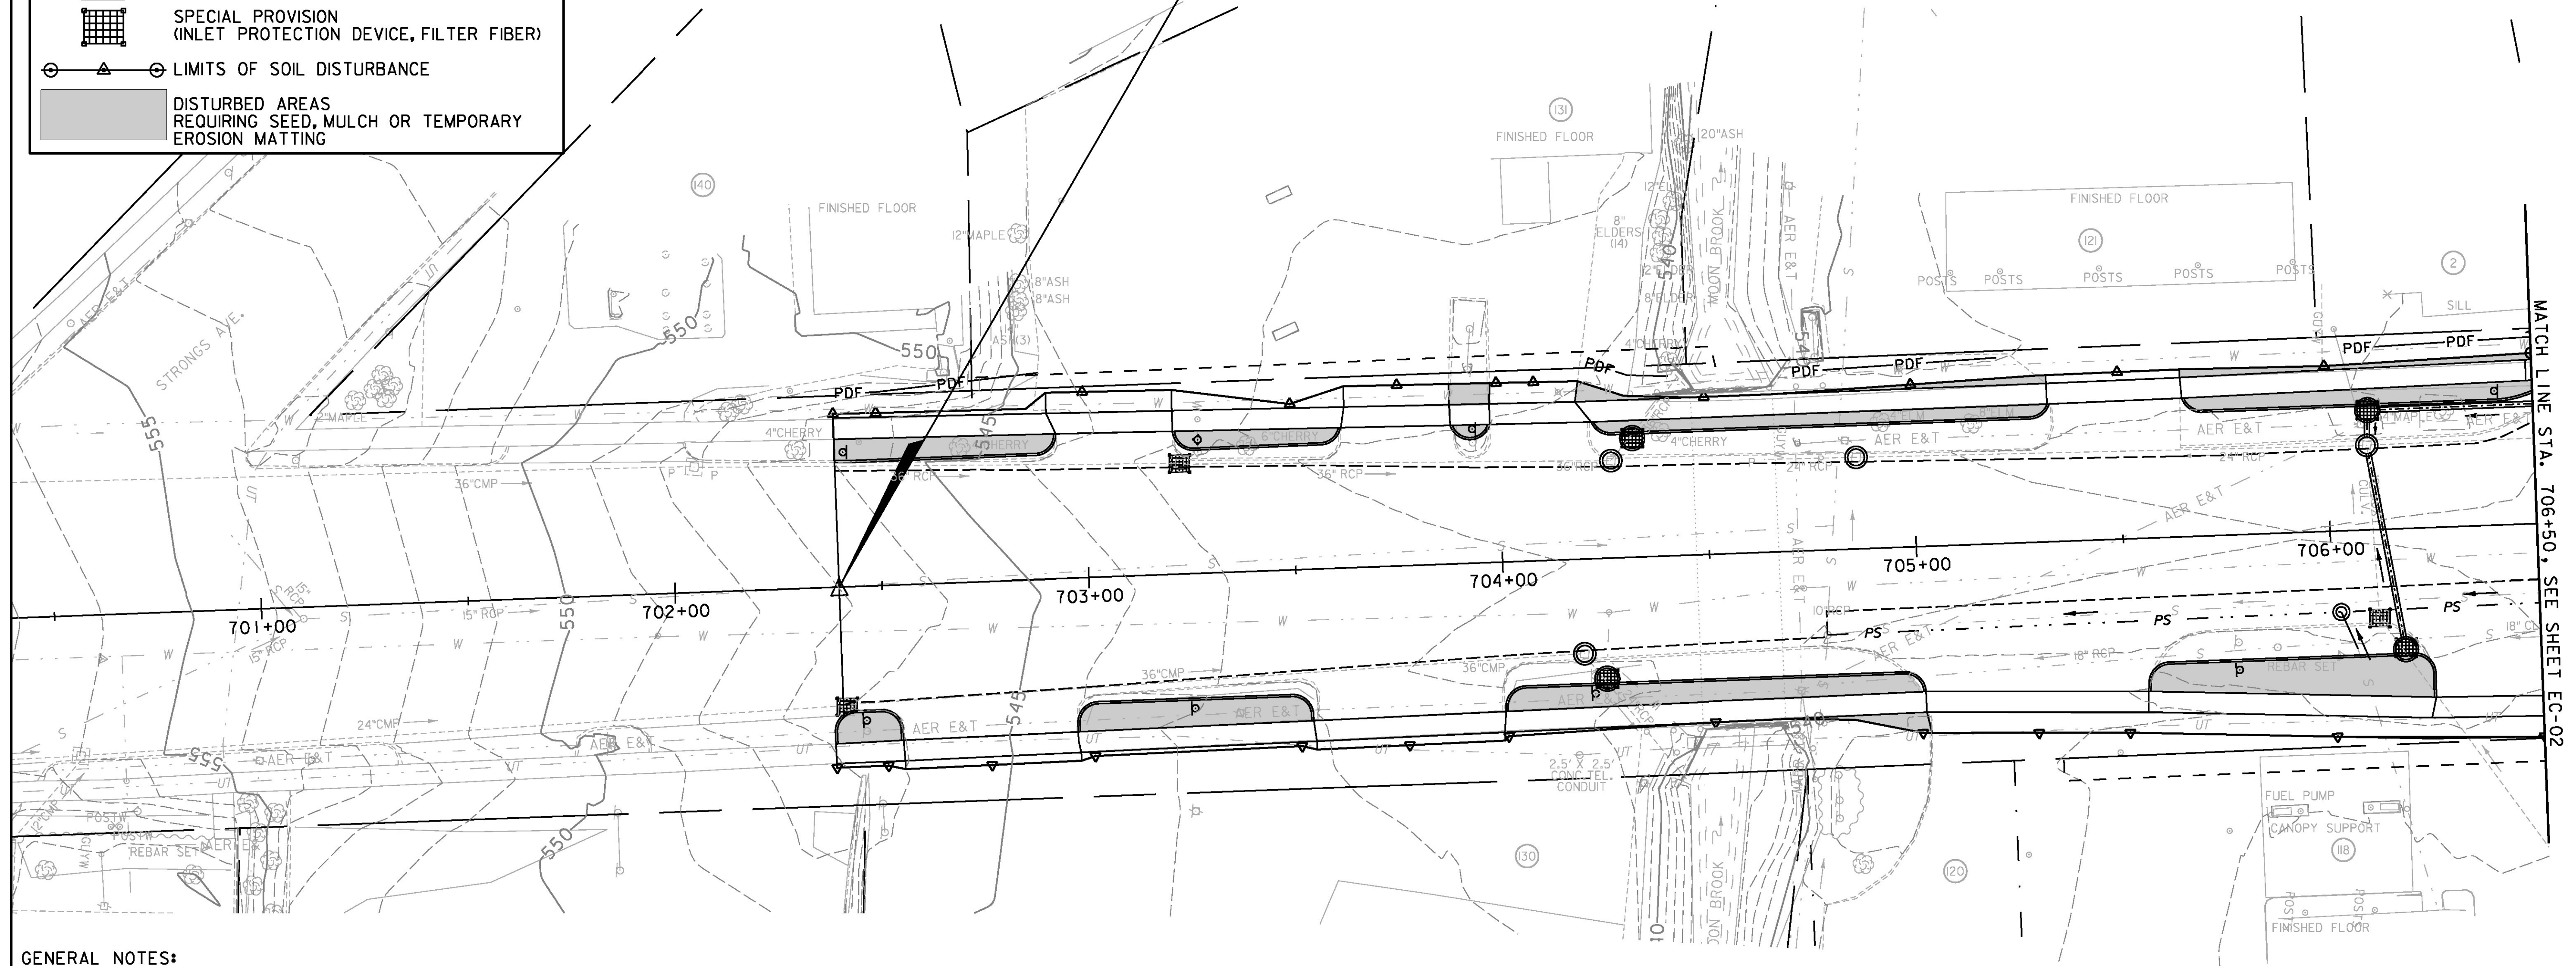


LEGEND

- AER E&T — AERIAL ELECTRIC & TELEPHONE
- W — WATER LINE
- S — SEWER LINE
- UT — UNDERGROUND TELEPHONE LINE
- — — — — PROPERTY LINE
- — — — — EXISTING R.O.W.
- - - - - TEMPORARY EASMENT
- PDF — PROJECT DEMARCATION FENCE
- - - - - SILT FENCE, WOVEN WIRE REINFORCED
-  STABILIZED CONSTRUCTION ENTRANCE
-  SPECIAL PROVISION (INLET PROTECTION DEVICE, FILTER FIBER)
-  LIMITS OF SOIL DISTURBANCE
-  DISTURBED AREAS REQUIRING SEED, MULCH OR TEMPORARY EROSION MATTING




U.S. ROUTE 7 CONST. & PI STA. 702+39.63
BEGIN PROJECT
BEGIN WIDENING



GENERAL NOTES:

1. THESE PLANS SHOW A CONCEPTUAL EROSION CONTROL PLAN. THE CONTRACTOR MUST SUBMIT A TEMPORARY EROSION CONTROL PLAN FOR APPROVAL.
2. TEMPORARY EROSION CONTROL MEASURES ARE CONCEPTUALLY SHOWN. THE CONTRACTOR MAY RELOCATE TEMPORARY MEASURES TO IMPROVE EROSION CONTROL WITH APPROVAL OF THE RESIDENT ENGINEER AND ON-SITE COORDINATOR. SILT FENCE SHALL NOT BE INSTALLED ACROSS CONTOURS.
3. THE CONTRACTOR SHALL USE OTHER TEMPORARY EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION OR AS DIRECTED BY THE RESIDENT ENGINEER AND ON-SITE COORDINATOR.
4. REFER TO TEMPORARY EROSION CONTROL DETAIL SHEETS FOR ADDITIONAL DETAILS.
5. INLET PROTECTION SHALL BE INSTALLED ON EXISTING DRAINAGE INLETS WITHIN PROJECT LIMITS. INLET PROTECTION SHALL BE REMOVED ONLY AFTER EXISTING COLLECTION SYSTEM IS NO LONGER FUNCTIONAL.

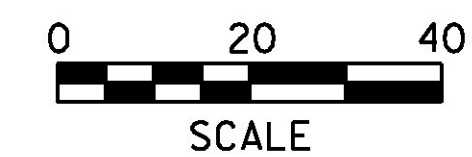

PROJECT NAME: RUTLAND CITY	
PROJECT NUMBER: STP 019-3(57)	
FILE NAME: ...rut_epsc_construction.dgn	PLOT DATE: 7/12/2013
PROJECT LEADER: GAE	DRAWN BY: PZA
DESIGNED BY: TFD	CHECKED BY: GAE
EPSC CONSTRUCTION SITE PLAN EC-01 SHEET 323 OF 392	