LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
					PERCENT GRADE			613.10	649.31	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	>10	STONE FILL TYPE I	GEOT. UNDER STONE FILL	
								CY	SY	
U.S. ROUTE 4								5.5		
KILLINGTON:										
1	422+00		LT			10		2	7	
	421+00	421+10								
2	422+40		LT			10		2	7	
3	428+50		LT			10		2	7	
4	433+00	437+00	LT/RT			400		60	270	
5	444+50		LT			10		2	7	
6	446+00		LT			10		2	7	
ROUNDINGS						-		5	5	
TOTALS						450		75	310	

LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
					PERCENT GRADE			613.10	649.31	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	>10	STONE FILL TYPE I	GEOT. UNDER STONE FILL	
								CY	SY	

LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
					PERCENT GRADE			613.10	649.31	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	>10	STONE FILL TYPE I	GEOT. UNDER STONE FILL	
								CY	SY	

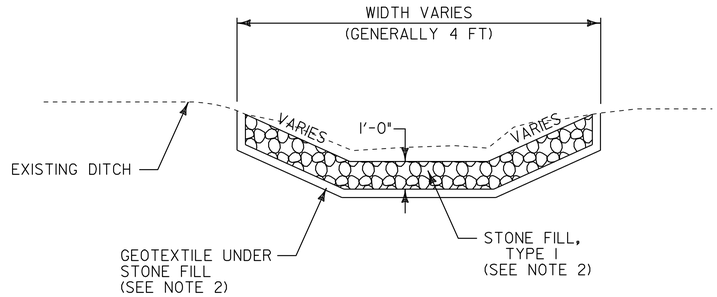

DITCH DETAIL

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. ESTIMATED QUANTITIES OF STONE FILL TYPE I AND GEOTEXTILE UNDER STONE FILL HAVE BEEN INCLUDED AS NEEDED. STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2.5 AND 10 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

NOT TO SCALE

DITCH CLEANING DETAIL SHEET

PROJECT NAME: KILLINGTON - BRIDGEWATER
PROJECT NUMBER: NH 2502(1)S

FILE NAME: p05b036dcs.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: J.S.P.
IPARM FILE: p05b036dcs.i

PLOT DATE: 15-MAY-2008 14
DRAWN BY: C.A.K.
CHECKED BY: D.E.G.
SHEET 12 OF 74