


646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)
 BRIDGEWATER:
 STA. 16+00.00 - STA. 32+00.00 LT & RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 BRIDGEWATER:
 STA. 16+00.00 - STA. 16+90.00 LT C D
 STA. 16+00.00 - STA. 28+50.00 S - D -
 STA. 28+50.00 - STA. 32+00.00 D - S

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)
 BRIDGEWATER:
 STA. 16+00.00 - STA. 32+00.00 LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 BRIDGEWATER:
 STA. 16+00.00 - STA. 16+90.00 LT C RT
 STA. 16+00.00 - STA. 28+50.00 S - D -
 STA. 28+50.00 - STA. 32+00.00 D - S

675.50 REMOVING SIGNS
 AS SHOWN - I

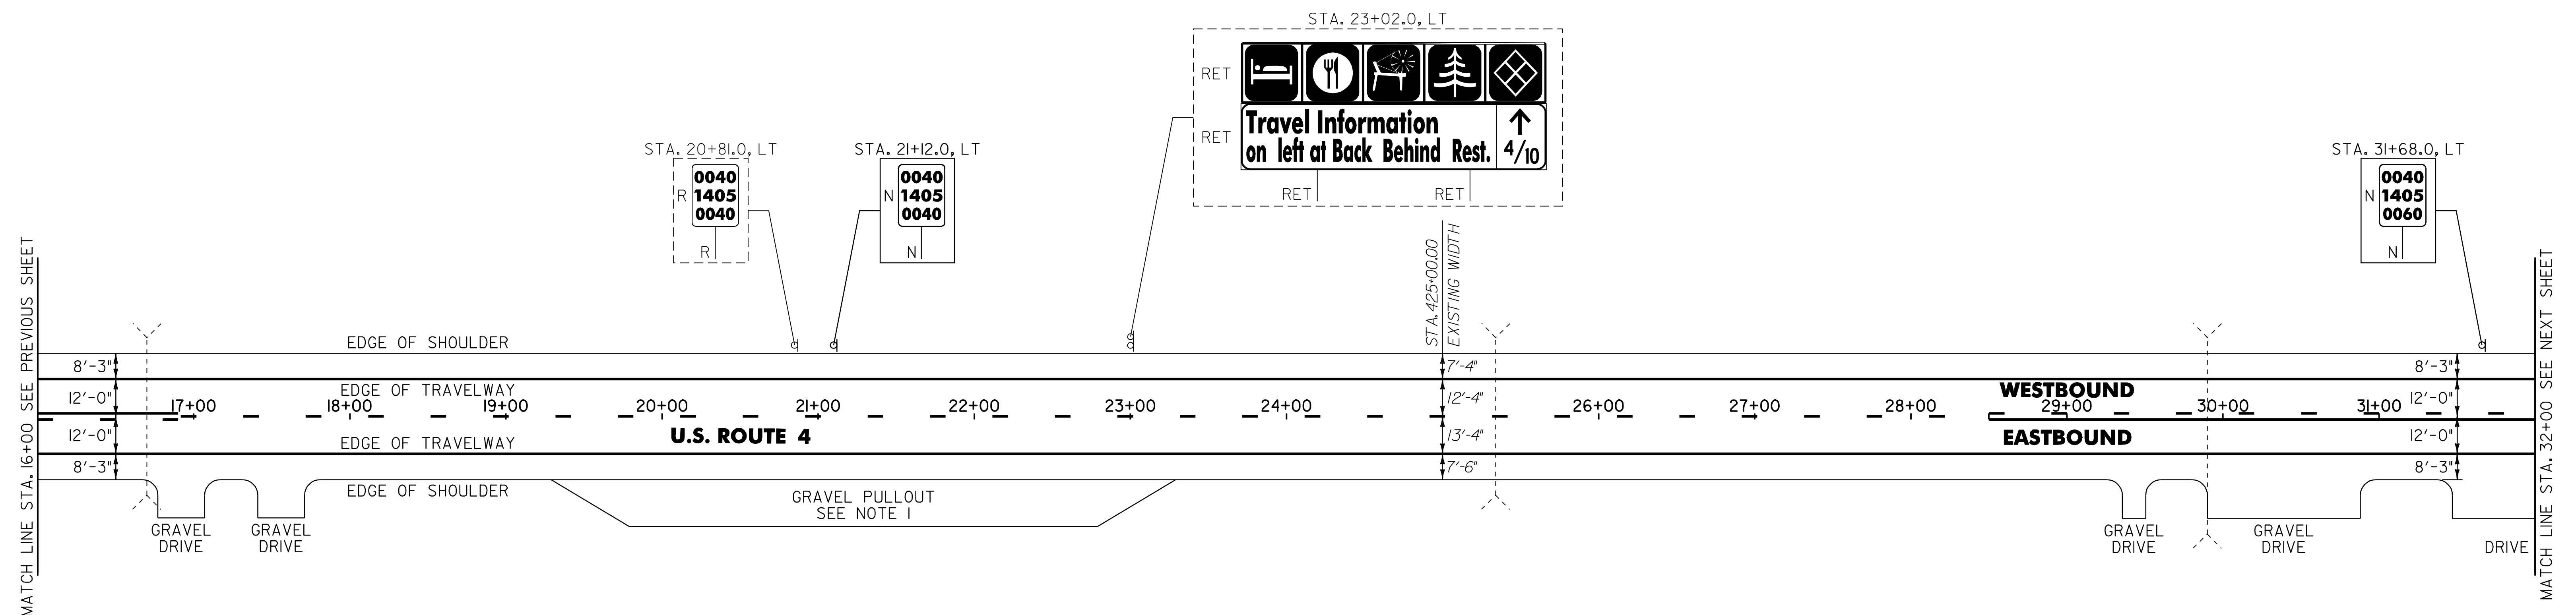

MATCH LINE STA. 16+00 SEE PREVIOUS SHEET

MATCH LINE STA. 32+00 SEE NEXT SHEET

- NOTES:
1. PROVIDE A 5 FT WIDE, 1 3/4" TYPE III APRON FOR THE EXISTING GRAVEL PULLOUT. ANY REQUIRED EXCAVATION OR GRADING SHALL BE PERFORMED AS DIRECTED BY THE RESIDENT ENGINEER AND PAID FOR UNDER THE APPLICABLE RENTAL ITEM(S).
 2. THERE ARE EXISTING UNDERGROUND UTILITIES LOCATED THROUGHOUT THE U.S. ROUTE 4 CORRIDOR IN THE PROJECT AREA. THE CONTRACTOR IS RESPONSIBLE FOR CONTACTING "DIG SAFE" AT 1-888-344-7233 TO DETERMINE THE LOCATIONS OF THESE UTILITIES PRIOR TO PERFORMING ANY SUBSURFACE OPERATIONS.

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = - - - - -
 NEW = _____

PROJECT LAYOUT SHEET #6	NOT TO SCALE	
	PROJECT NAME: KILLINGTON - BRIDGEWATER PROJECT NUMBER: NH 2502(1)S FILE NAME: p05b036.dgn PROJECT LEADER: D.E.G. DESIGNED BY: J.S.P. IPARM FILE: p05b036i06.i	PLOT DATE: 15-MAY-2008 14 DRAWN BY: C.A.K. CHECKED BY: D.E.G. SHEET 18 OF 74