LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
					PERCENT GRADE			613.10	649.31	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	>10	STONE FILL TYP. 1	GEOT. UNDER STONE FILL	
								CY	SY	
U.S. ROUTE 7										
WALTHAM:										
1	0+00	23+00	LT			2300		341	1534	
2	66+00	80+50	RT			1450		215	967	
FERRISBURGH:										
3	216+75	227+50	LT			1075		160	717	
4	338+00	342+00	LT			400		60	267	
5	348+00	355+00	RT			700		104	467	
ROUNDINGS						-		-	23	
TOTALS						5925		880	3975	

LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
					PERCENT GRADE			613.10	649.31	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	>10	STONE FILL TYP. 1	GEOT. UNDER STONE FILL	
								CY	SY	

LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
					PERCENT GRADE			613.10	649.31	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	>10	STONE FILL TYP. 1	GEOT. UNDER STONE FILL	
								CY	SY	

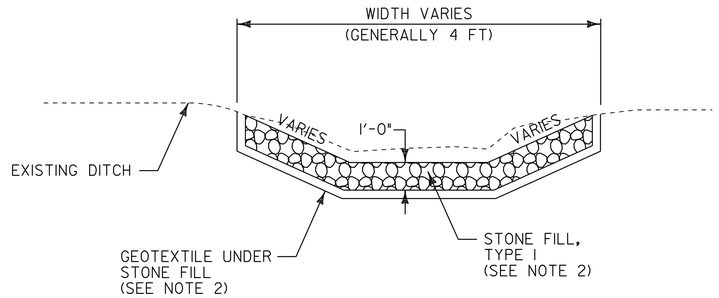

DITCH DETAIL

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. ESTIMATED QUANTITIES OF STONE FILL TYPE I AND GEOTEXTILE UNDER STONE FILL HAVE BEEN INCLUDED AS NEEDED. STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2.5 AND 10 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

NOT TO SCALE

DITCH CLEANING DETAIL SHEET

PROJECT NAME: NEW_HAVEN_-_FERRISBURGH
PROJECT NUMBER: NH_2503(I)S

FILE NAME: 05b038.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: M.J.M.
IPARM FILE: p05b038dcs.i

PLOT DATE: 31-JUL-2009 15
DRAWN BY: C.A.K.
CHECKED BY: D.W.E.
SHEET 13 OF 87