

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

NEW HAVEN:
STA 322+02.72 - STA 336+00.00 EDGE LINE LT & RT

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)

NEW HAVEN:
STA 322+02.72 - STA 336+00.00 EDGE LINE LT & RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

NEW HAVEN:
STA 322+02.72 - STA 335+28.00 LT S - S
STA 335+28.00 - STA 336+00.00 S - D
STA 326+62.08 DOUBLE SOLID RT, TH-8

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
(ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

NEW HAVEN:
STA 322+02.72 - STA 335+28.00 LT S - S
STA 335+28.00 - STA 336+00.00 S - D
STA 326+62.08 DOUBLE SOLID RT, TH-8

646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC

NEW HAVEN:
STA 326+62.08 RT, TH-8

646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC

NEW HAVEN:
STA 326+62.08 RT, TH-8 "S,T,O,P" (4 EA)

646.682 TEMPORARY 24 INCH STOP BAR, PAINT

NEW HAVEN:
STA 326+62.08 RT, TH-8

646.692 TEMPORARY LETTER OR SYMBOL, PAINT

NEW HAVEN:
STA 326+62.08 RT, TH-8 "S,T,O,P" (4 EA)


675.50 REMOVING SIGNS

AS SHOWN - 6

675.60 ERECTING SALVAGED SIGNS

AS SHOWN - 2

U.S. ROUTE 7
MM 6.099 = STA 322+02.72
BEGIN NH 2503(I)S

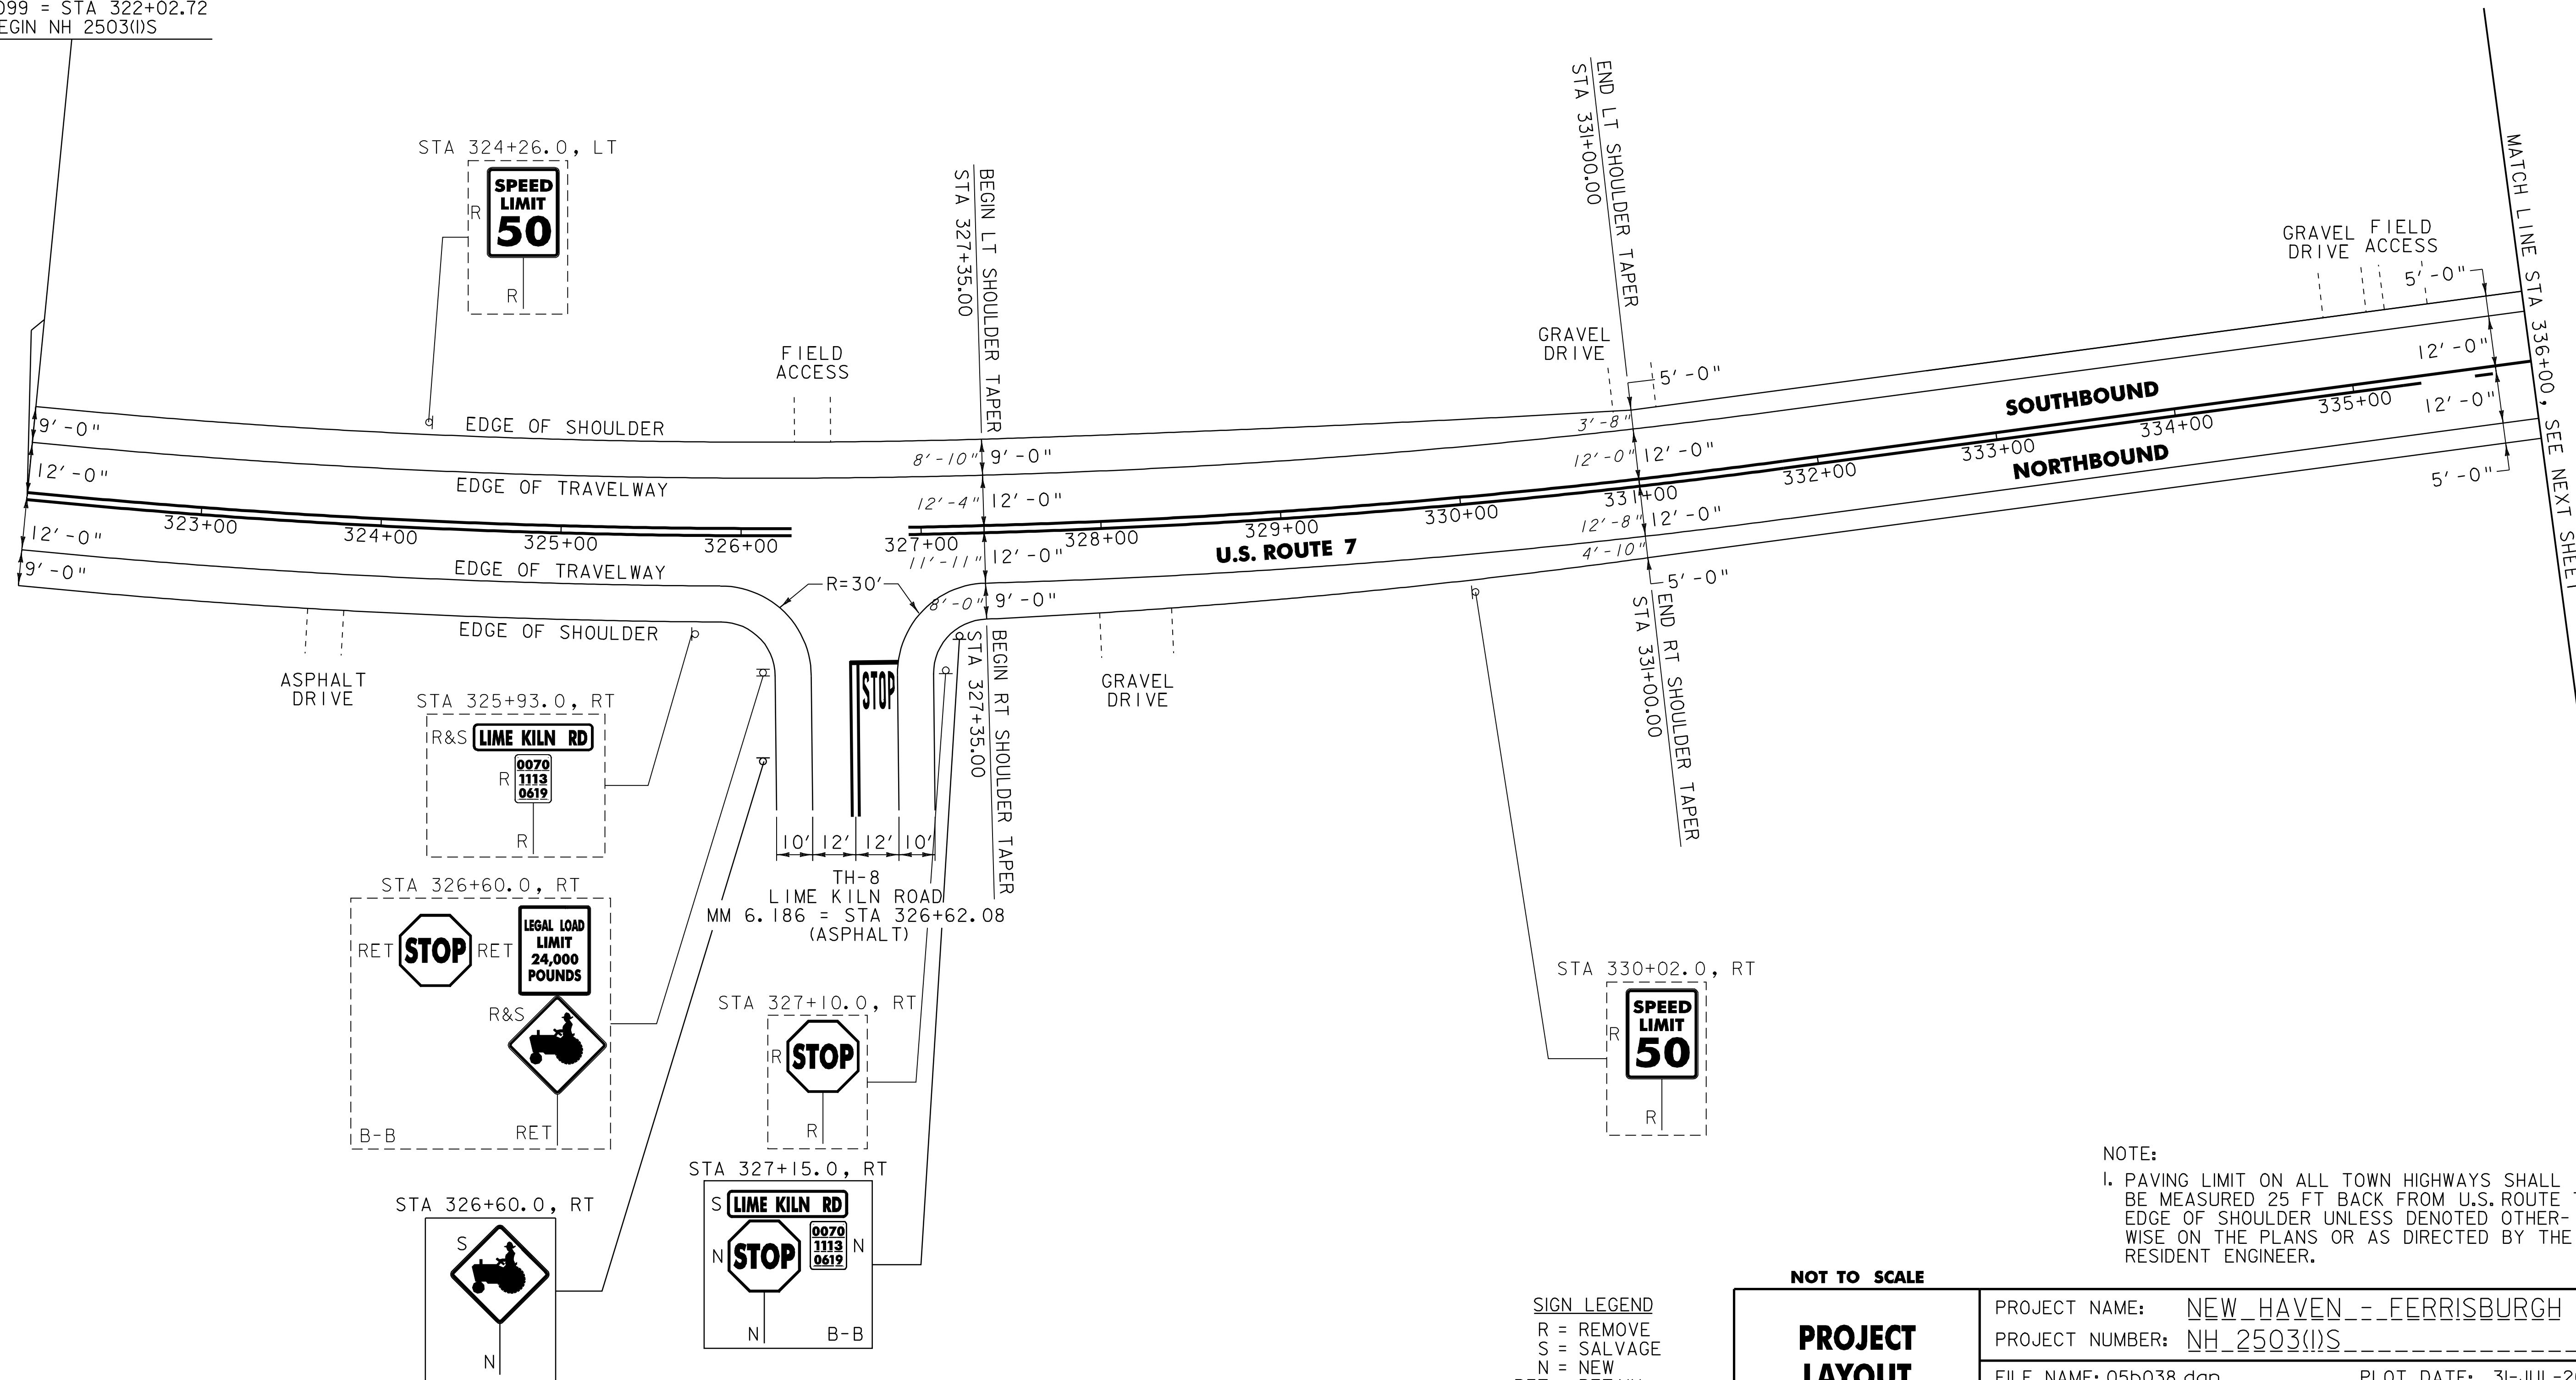

NOTE:
1. PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 25 FT BACK FROM U.S. ROUTE 7 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.

SIGN LEGEND
R = REMOVE
S = SALVAGE
N = NEW
RET = RETAIN
B-B = BACK TO BACK
EXISTING = - - - - -
NEW = _____

NOT TO SCALE

PROJECT LAYOUT SHEET #1

PROJECT NAME: NEW_HAVEN_-_FERRISBURGH	PLOT DATE: 31-JUL-2009 15
PROJECT NUMBER: NH_2503(I)S	DRAWN BY: C.A.K.
FILE NAME: Q5bQ38.dgn	CHECKED BY: D.W.E.
DESIGNED BY: M.J.M.	SHEET 14 OF 87
IPARM FILE: P05b038IQI.I	