


646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)
 WILMINGTON:
 STA. 236+00.00 - STA. 252+00.00 EDGE LINE LT & RT
 646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 WILMINGTON:
 STA. 236+00.00 - STA. 252+00.00 LT C RT S
 STA. 244+62.24 DOUBLE SOLID LT, TH-26

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)
 WILMINGTON:
 STA. 236+00.00 - STA. 252+00.00 EDGE LINE LT & RT
 646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 WILMINGTON:
 STA. 236+00.00 - STA. 252+00.00 LT C RT S
 STA. 244+62.24 DOUBLE SOLID LT, TH-26

646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC
 WILMINGTON:
 STA. 244+62.24 LT, TH-26
 646.682 TEMPORARY 24 INCH STOP BAR, PAINT
 WILMINGTON:
 STA. 244+62.24 LT, TH-26

646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC
 WILMINGTON:
 STA. 244+62.24 LT, TH-26 "S,T,O,P" (4 EA)
 646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 WILMINGTON:
 STA. 244+62.24 LT, TH-26 "S,T,O,P" (4 EA)

675.50 REMOVING SIGNS
 AS SHOWN - 4
 675.60 ERECTING SALVAGED SIGNS
 AS SHOWN - 1

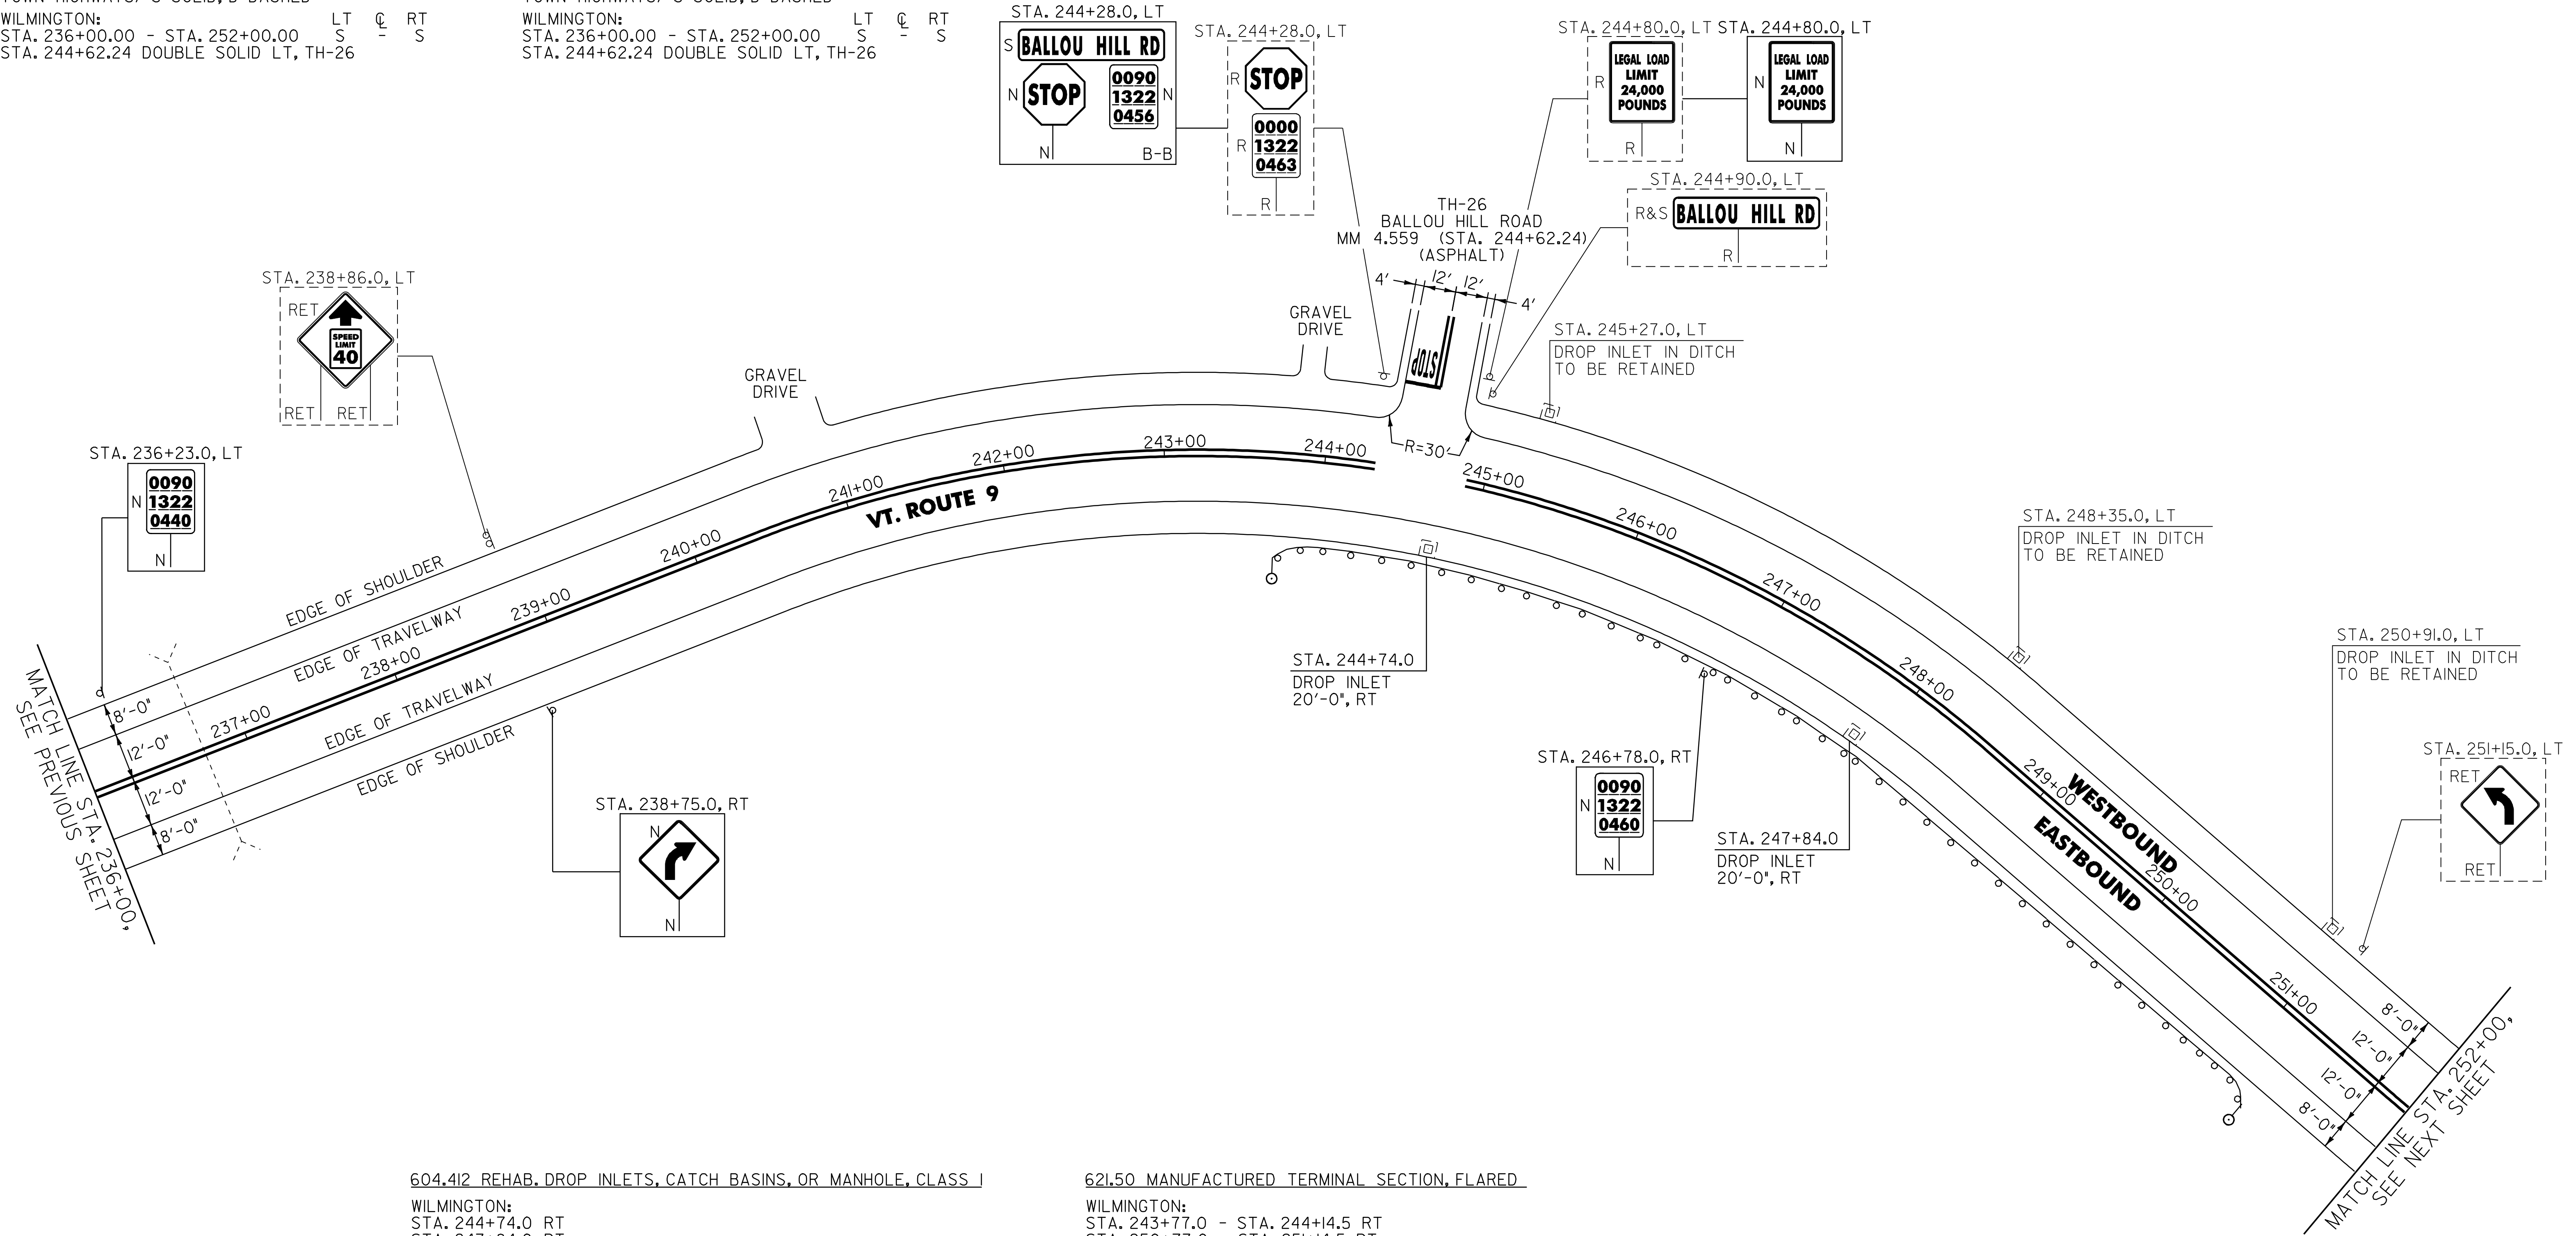

604.412 REHAB. DROP INLETS, CATCH BASINS, OR MANHOLE, CLASS I
 WILMINGTON:
 STA. 244+74.0 RT
 STA. 247+84.0 RT
 616.35 TREATED TIMBER CURB
 WILMINGTON:
 STA. 244+70.0 - STA. 250+95.0 RT (625.0 LF)
 STA. 244+75.0 - STA. 250+74.0 RT (625.0 LF)
 621.20 STEEL BEAM GUARDRAIL, GALVANIZED
 WILMINGTON:
 STA. 244+14.5 - STA. 250+77.0 RT (662.5 LF)
 STA. 244+58.0 - STA. 250+95.0 RT (662.5 LF)

621.50 MANUFACTURED TERMINAL SECTION, FLARED
 WILMINGTON:
 STA. 243+77.0 - STA. 244+14.5 RT
 STA. 250+77.0 - STA. 251+14.5 RT
 STA. 243+79.0 - STA. 251+13.0 RT (734.0 LF)
 621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 WILMINGTON:
 STA. 243+79.0 - STA. 251+13.0 RT (734.0 LF)
 676.10 DELINEATOR WITH STEEL POST
 ♀ TYPE I WHITE
 WILMINGTON:
 STA. 243+77.0 RT
 STA. 251+14.5 RT

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = - - - - -
 NEW = _____

NOT TO SCALE

PROJECT LAYOUT SHEET #12

PROJECT NAME: WILMINGTON
 PROJECT NUMBER: AC_NH_2504(I)S
 FILE NAME: p05b044.dgn
 PROJECT LEADER: D.E.G.
 DESIGNED BY: M.J.M.
 IPARM FILE: p05b044L12.i
 PLOT DATE: 23-AUG-2010 14
 DRAWN BY: C.A.K.
 CHECKED BY: D.W.E.
 SHEET 31 OF 125