

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)

VT. ROUTE 9:
 STA 221+00.00 - STA 225+50.00 EDGE LINE LT & RT

VT. ROUTE 100:
 STA 129+00.00 - STA 130+71.21 EDGE LINE LT & RT

675.50 REMOVING SIGNS
 AS SHOWN - 17

675.60 ERECTING SALVAGED SIGNS
 AS SHOWN - 1

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAY)
 S=SOLID, D=DASHED

VT. ROUTE 9:
 STA 221+00.00 - STA 225+50.00 LT C RT
 S - S

VT. ROUTE 100:
 STA 129+00.00 - STA 130+30.00 S - S

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)



VT. ROUTE 9:
 STA 221+00.00 - STA 225+50.00 EDGE LINE LT & RT

VT. ROUTE 100:
 STA 129+00.00 - STA 130+71.21 EDGE LINE LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAY)
 S=SOLID, D=DASHED

VT. ROUTE 9:
 STA 221+00.00 - STA 225+50.00 LT C RT
 S - S

VT. ROUTE 100:
 STA 129+00.00 - STA 130+30.00 S - S

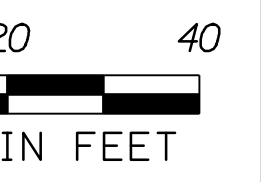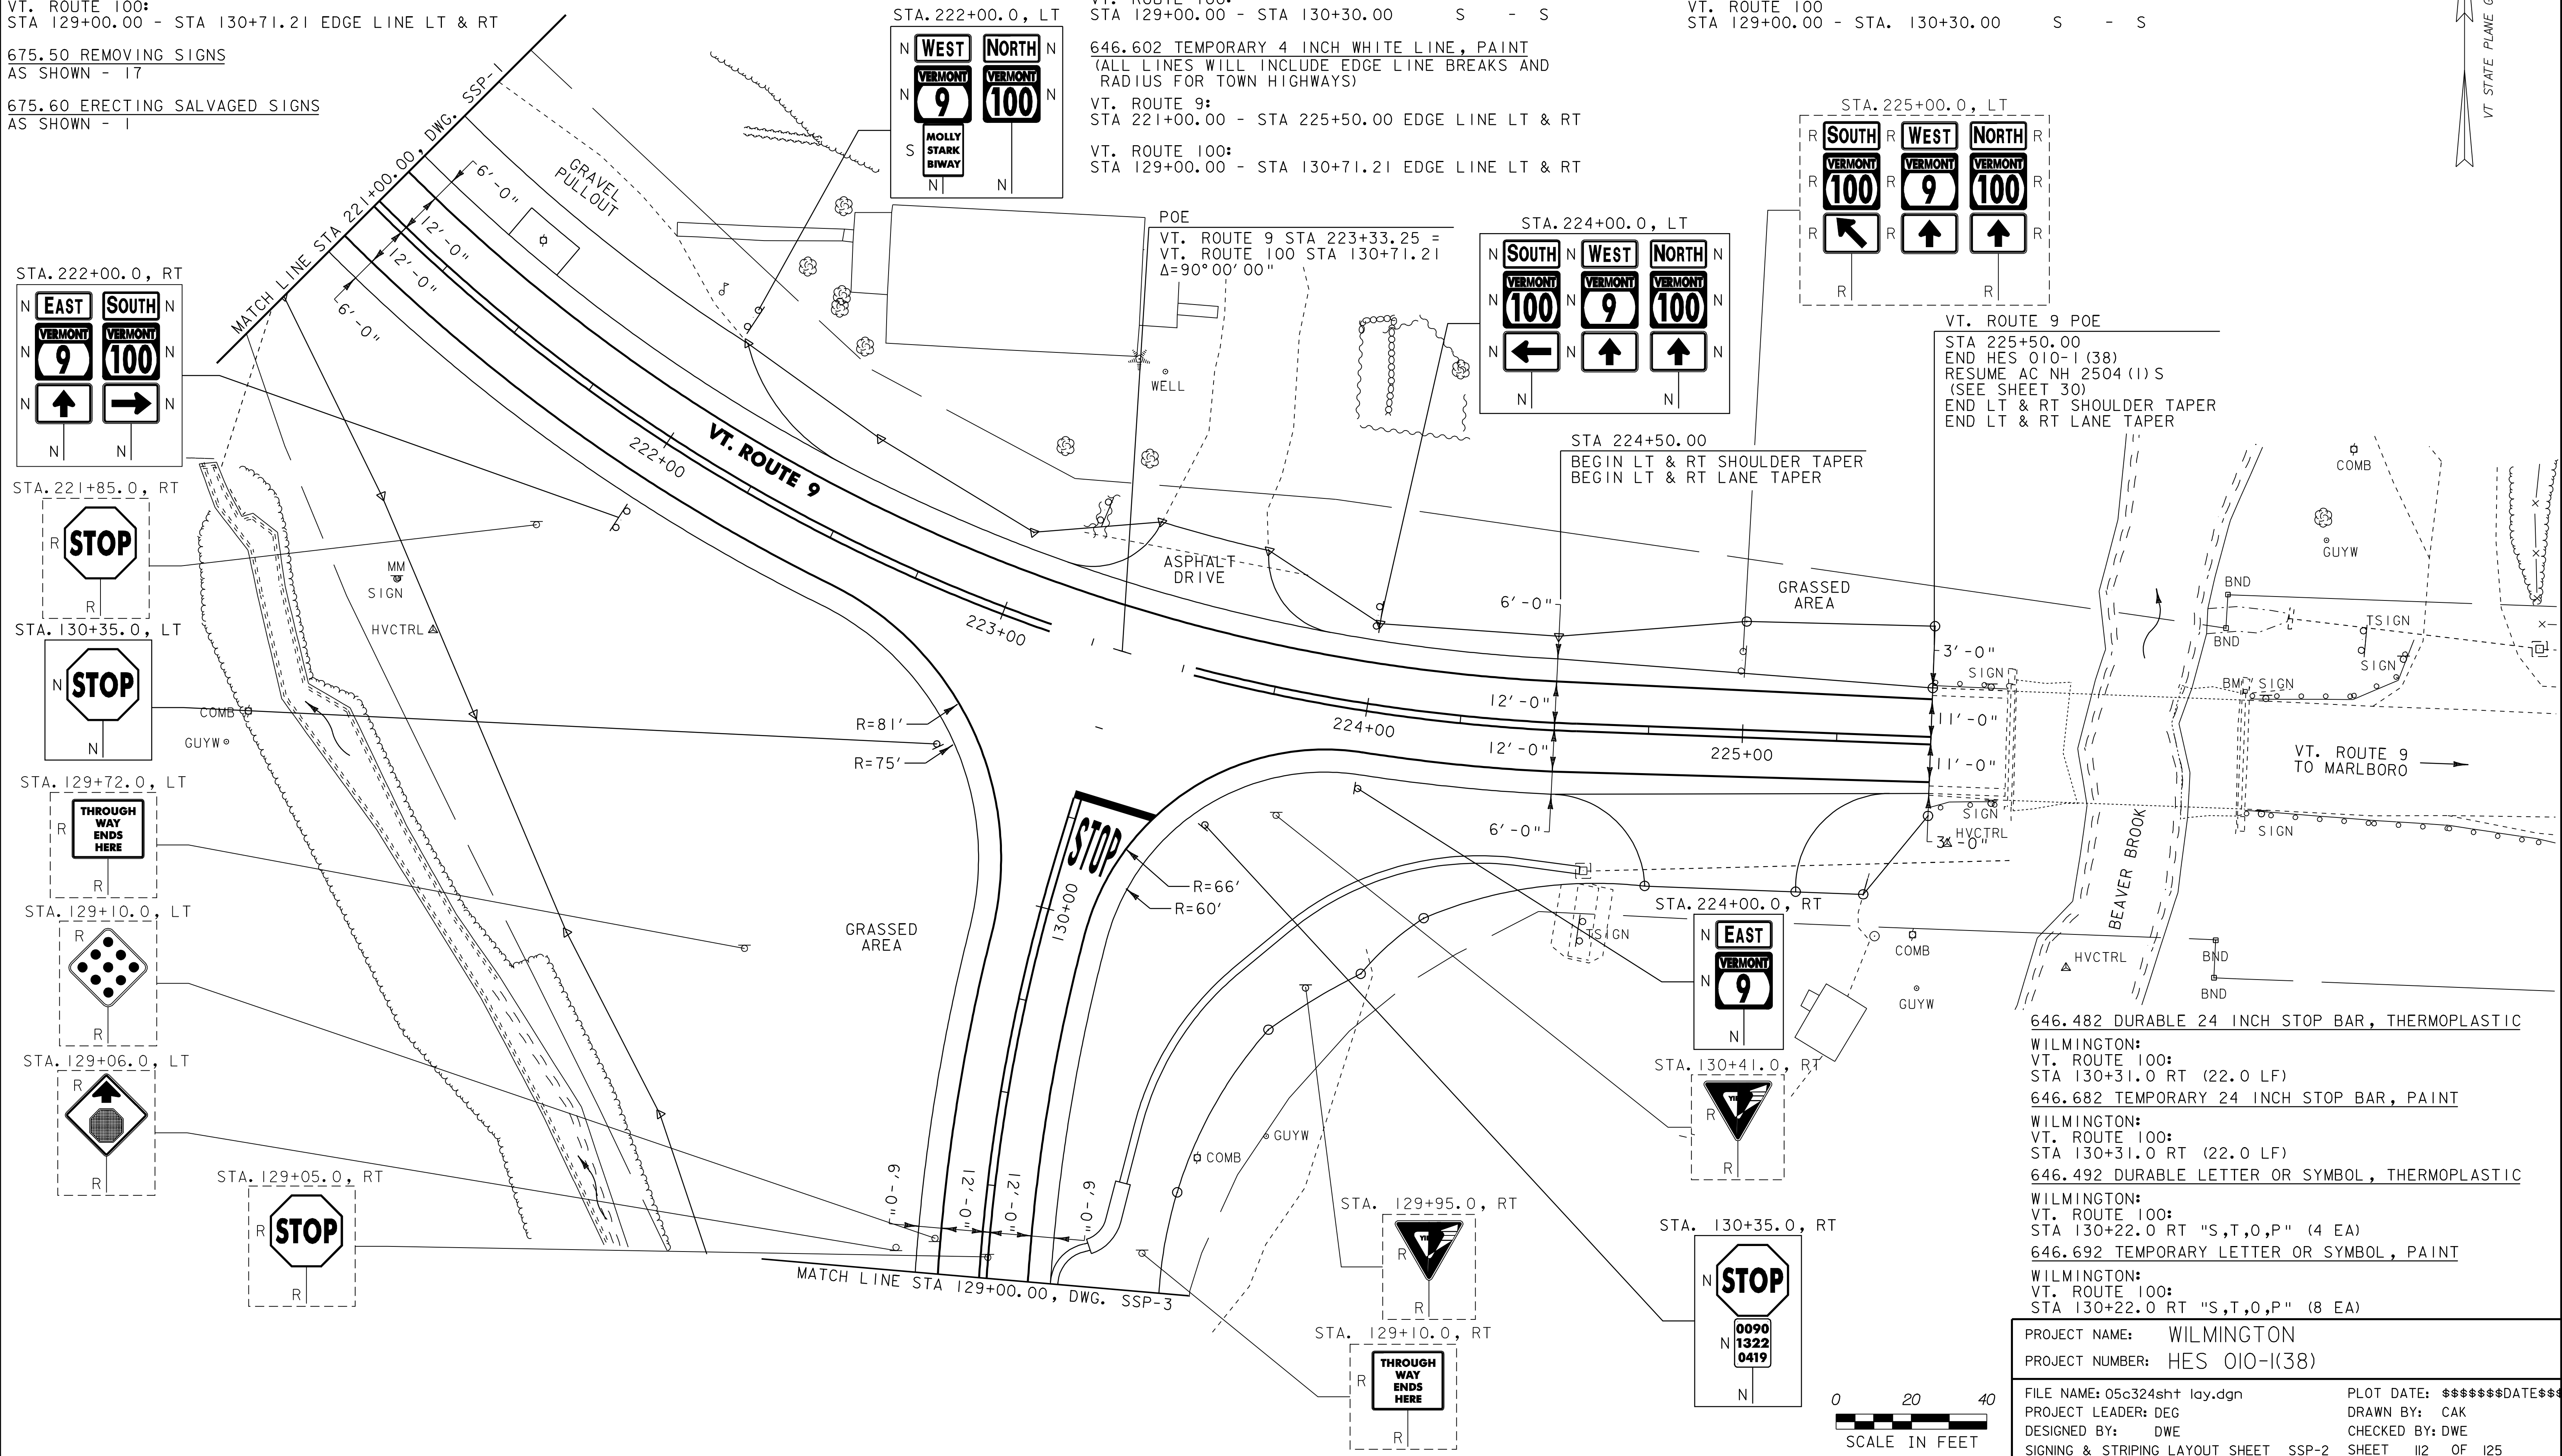

- 646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC
 WILMINGTON:
 VT. ROUTE 100:
 STA 130+31.0 RT (22.0 LF)
- 646.682 TEMPORARY 24 INCH STOP BAR, PAINT
 WILMINGTON:
 VT. ROUTE 100:
 STA 130+31.0 RT (22.0 LF)
- 646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC
 WILMINGTON:
 VT. ROUTE 100:
 STA 130+22.0 RT "S,T,O,P" (4 EA)
- 646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 WILMINGTON:
 VT. ROUTE 100:
 STA 130+22.0 RT "S,T,O,P" (8 EA)

PROJECT NAME: WILMINGTON
 PROJECT NUMBER: HES 010-1(38)

FILE NAME: 05c324sht lay.dgn
 PROJECT LEADER: DEG
 DESIGNED BY: DWE
 SIGNING & STRIPING LAYOUT SHEET SSP-2 SHEET 112 OF 125

PLOT DATE: \$\$\$\$\$\$DATE\$\$\$
 DRAWN BY: CAK
 CHECKED BY: DWE