
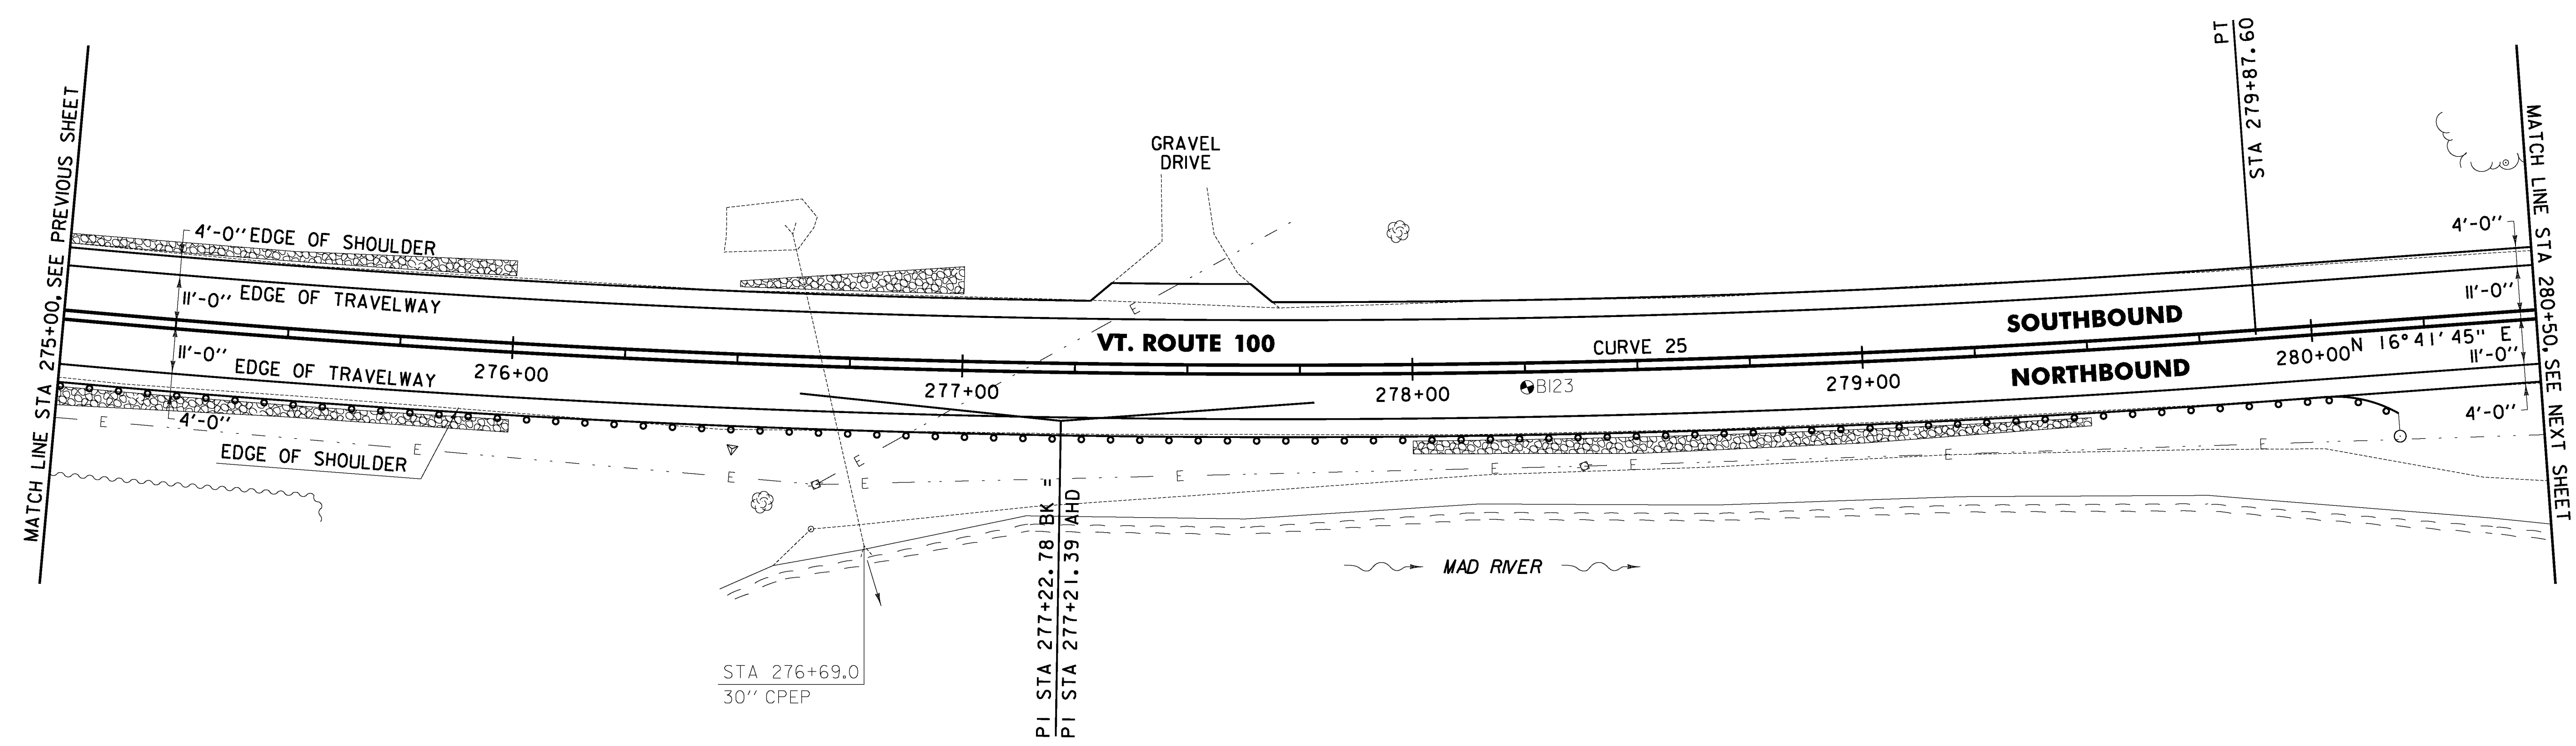


646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC OR
 646.403 DURABLE 4 INCH WHITE LINE, EPOXY PAINT OR
 646.404 DURABLE 4 INCH WHITE LINE, POLYUREA
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADII FOR TOWN HIGHWAYS)
 WARREN:
 STA 275+00.00 - STA 280+50.00 LT & RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC OR
 646.413 DURABLE 4 INCH YELLOW LINE, EPOXY PAINT OR
 646.414 DURABLE 4 INCH YELLOW LINE, POLYUREA
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 WARREN:
 STA 275+00.00 - STA 280+50.00

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADII FOR TOWN HIGHWAYS)
 WARREN:
 STA 275+00.00 - STA 280+50.00 LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 WARREN:
 STA 275+00.00 - STA 280+50.00 LT C RT
 S - S

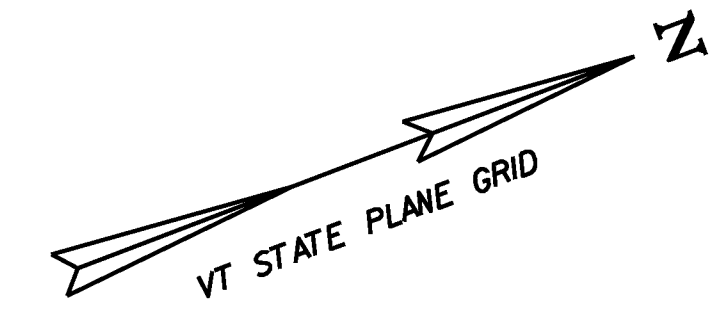

613.10 STONE FILL, TYPE I
 WARREN:
 STA 275+00.0 - STA 276+00.0 RT (15.8 CY)
 STA 275+00.0 - STA 276+00.0 LT (5.1 CY)
 STA 276+50.0 - STA 277+00.0 LT (9.9 CY)
 STA 278+00.0 - STA 279+50.0 RT (20.8 CY)

651.40 GRUBBING MATERIAL
 WARREN:
 STA 275+00.0 - STA 276+00.0 RT (46.0 SY)
 STA 275+00.0 - STA 276+00.0 LT (31.5 SY)
 STA 276+50.0 - STA 277+00.0 LT (28.9 SY)
 STA 278+00.0 - STA 279+50.0 RT (60.3 SY)

653.20 TEMPORARY EROSION MATTING
 WARREN:
 STA 275+00.0 - STA 276+00.0 RT (46.0 SY)
 STA 275+00.0 - STA 276+00.0 LT (31.5 SY)
 STA 276+50.0 - STA 277+00.0 LT (28.9 SY)
 STA 278+00.0 - STA 279+50.0 RT (60.3 SY)

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 WARREN:
 STA 276+65.0 - STA 280+02.0 RT (337.0 LF)

676.10 DELINEATOR WITH STEEL POST
 WARREN:
 STA 280+18.0 RT

649.31 GEOTEXTILE UNDER STONE FILL
 WARREN:
 STA 275+00.0 - STA 276+00.0 RT (68.3 SY)
 STA 275+00.0 - STA 276+00.0 LT (53.7 SY)
 STA 276+50.0 - STA 277+00.0 LT (40.0 SY)
 STA 278+00.0 - STA 279+50.0 RT (93.6 SY)

900.640 SPECIAL PROVISION (BOX BEAM GUARDRAIL W/7 FEET POSTS)
 WARREN:
 STA 275+00.0 - STA 280+18.0 RT (518.0 LF)

SOIL BORING DATA			
BORING #	DEPTH (FT.)	PCC	COMMENTS
BI23	5.0	NO	

CURVE 25
 $\Delta = 10^{\circ} 08' 31''$
 $D = 1^{\circ} 54' 35''$
 $R = 3000.00'$
 $T = 266.21'$
 $L = 531.03'$
 $E = 11.79'$
 $e = 0.037 \text{ FT/FT}$

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = -----
 NEW = _____
 ⊙ = RETURN TO THE TOWN OF WARREN



LEGEND

	ITEM 613.10 STONE FILL, TYPE I
	ITEM 653.20 TEMPORARY EROSION MATTING

PROJECT LAYOUT SHEET #43

PROJECT NAME: WARREN - WAITSFIELD	PLOT DATE: 12/20/2012
PROJECT NUMBER: STP 2506(1)	DRAWN BY: W.G.P.
FILE NAME: p05b048.dgn	CHECKED BY: D.E.G.
PROJECT LEADER: D.E.G.	SHEET 69 OF 310
DESIGNED BY: M.J.M.	
IPARM FILE: p05b048i43.i	

FILE NAME: U:\1762\CADD\N\STP\2506\p05b048.dgn
 DATE/TIME: 12/20/2012 10:48:48 AM
 USER: J.4886