

TEMPORARY 4in YELLOW LINE (PAINT)
4in YELLOW LINE

STA 119+00 TO 121+25 SOLID LT&RT
STA 121+25 TO 124+50 DOUBLE SOLID LT&RT
STA 124+50 TO 130+00 SOLID LT&RT
STA 129+00 TO 130+00 DOUBLE SOLID LT

LETTER OR SYMBOL
STA 120+02 LT
STA 120+42 LT

REMOVING SIGNS
2



123+40
T.I.C.S. RET
T.I.C.S. RET
T.I.C.S. RET
RET RET

TEMPORARY 4in WHITE LINE (PAINT)
4in WHITE LINE

STA 119+00 TO 130+00 SOLID LT&RT
STA 119+00 TO 120+50 SOLID LT
STA 120+50 TO 122+20 DOTTED LT
STA 129+00 TO 130+00 DOTTED RT

TEMPORARY LETTER OR SYMBOL (PAINT)
STA 120+02 LT

8in YELLOW LINE
STA 121+25 TO 124+50 PAINTED ISLAND
STA 129+00 TO 130+00 PAINTED ISLAND

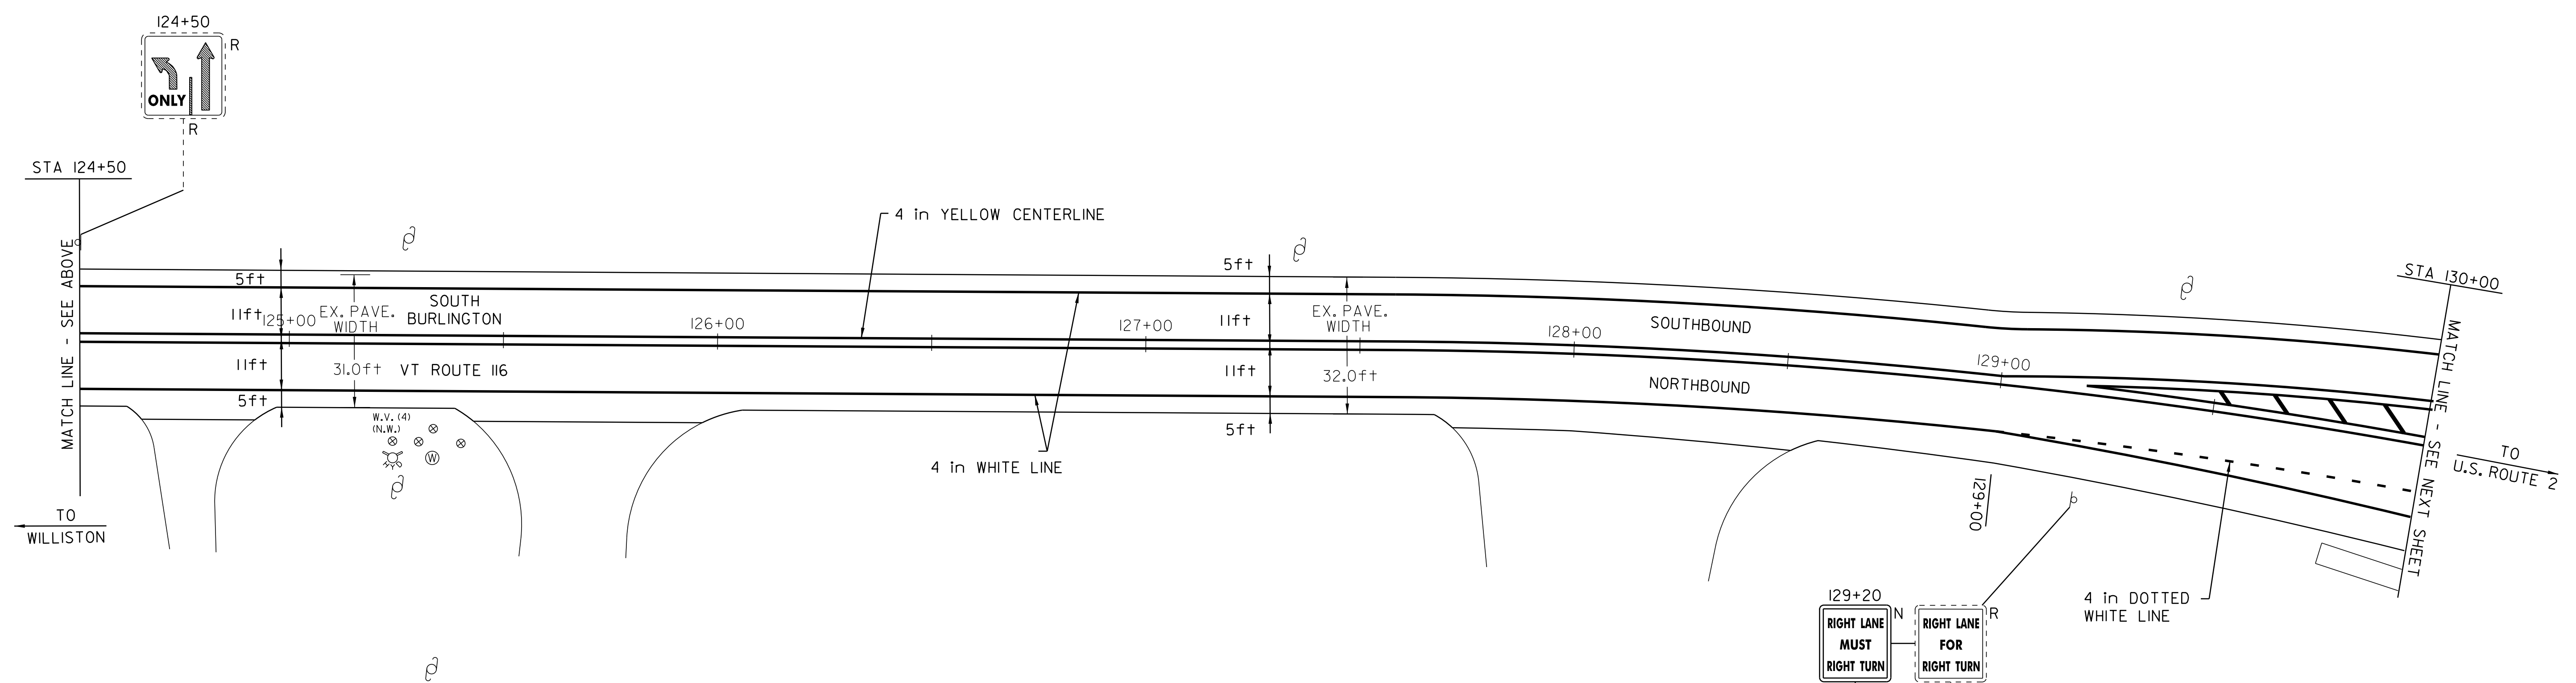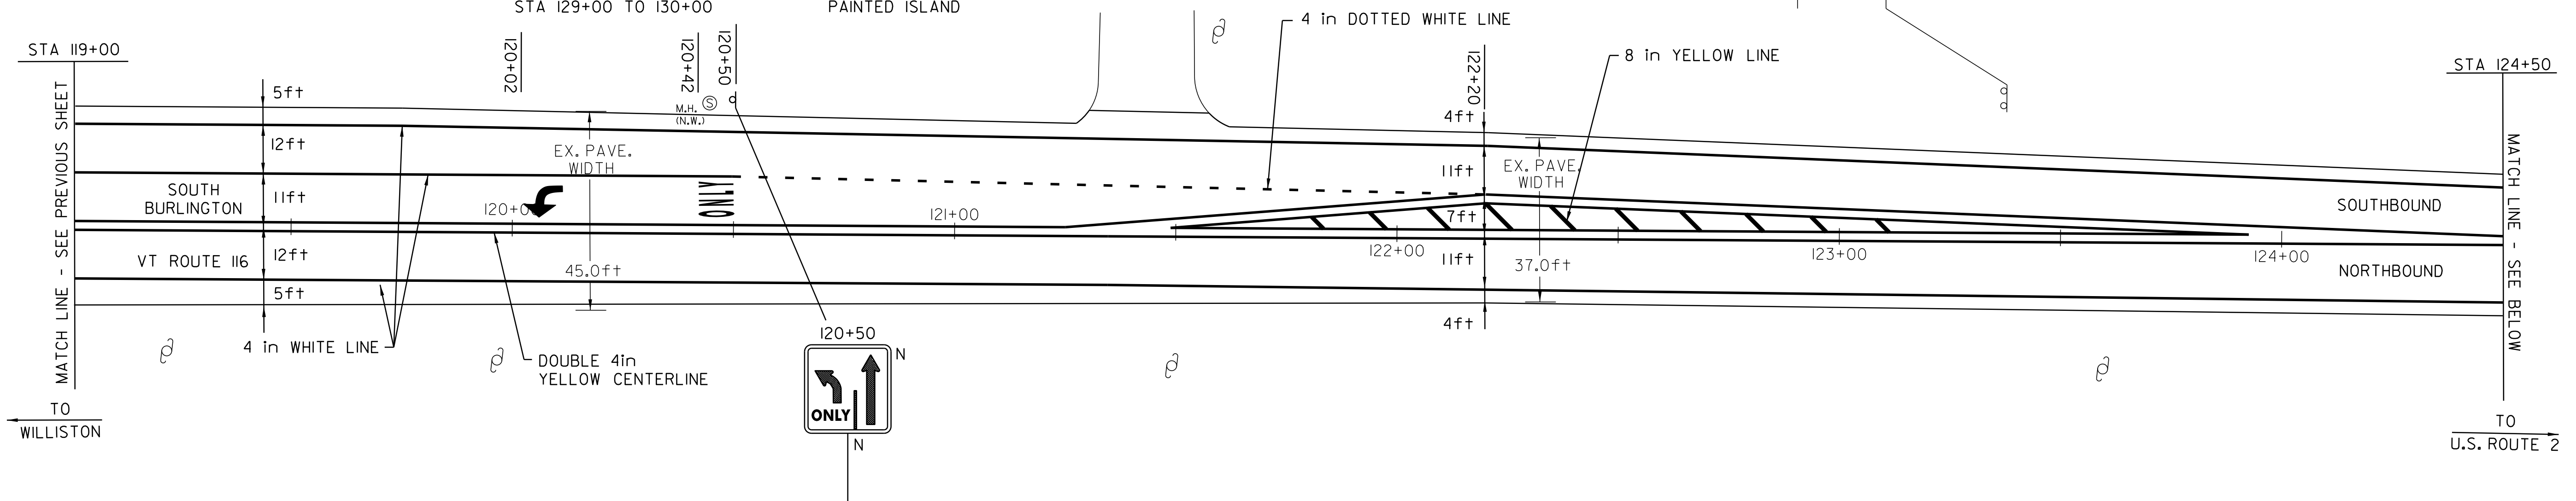

- LEGEND
- N = NEW
 - R = REMOVE
 - R&S = REMOVE & SALVAGE
 - S = SALVAGE
 - RET = RETAIN
 - B-TO-B = BACK TO BACK
 - ⊕ ⊞ □ CATCH BASIN/DI
 - (N.W.) = NO WORK REQUIRED (TYP. FOR D.I.'S, & C.B.'S WHERE NOTED)
 - I YIELDING MARKER POST
 - ⊕ UTILITY POLE
 - DRIVE

PAVING PROJECT LAYOUT SHEET #11

DESIGNED BY	BCE/PJM	DATE	10-06
DRAWN BY	C.E.A., INC.	DATE	10-06
DESIGN FILE NO.	p05b052.dgn		
PRF FILE	p05b052a11	DATE PLOTTED	03-MAY-2012 17
PROJ. NAME	ST. GEORGE-SO. BURLINGTON		
PROJ. NO.	ST-STP 2508(1)S		
SHEET	20	OF	42 SHEETS